

New Product Notification



Formerly A. O. Smith Electrical Products Company

HEATCRAFT REPLACEMENT MOTORS BOHN, CHANDLER, CLIMATE CONTROL AND LARKIN

3-in-1™

Replaces 1/12, 1/15, 1/20 HP
PSC and Low Efficient
Shaded Pole Designs

Reversing plug
for easy
rotation change



Stock No. 9721

Extra mounting
nuts for quick
installation

Low temp (-40°F)
lubrication
system




**ENERGY
SAVINGS
PSC
DESIGN**

50% More Efficient than Shaded Pole Motors

Use of a permanent split capacitor design allows the motor to deliver more power with a lower amp draw. Cooler operation results in fewer failures. Ball bearings provide smooth, quiet operation and extended motor life.

Features:

- ✓ Easy-to-Read Connection Diagram Attached to White Lead Wire
- ✓ Now! Four Studs on Each End
- ✓ 40°C Ambient
- ✓ Class B Insulation
- ✓ UL and CSA Recognized
- See Reverse Side for Outline Drawing and Additional Heatcraft Replacement Motors

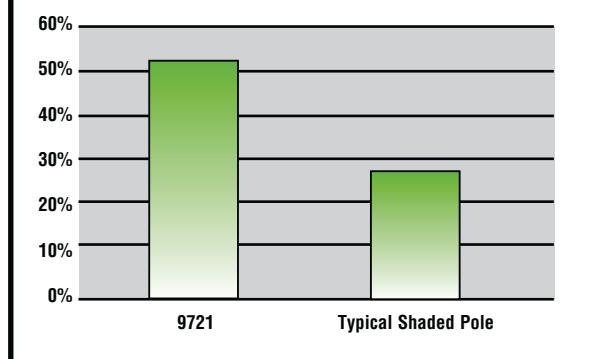

- \$ Less efficient shaded pole motors are often used in original equipment to cut costs. While they do allow some small savings in purchase price, the savings are quickly eaten up in electric bills at today's high power costs.

Stock No.	HP	Volts	Amps	RPM	Speeds	Frame	SF	HZ	Rotation	Wt.
9721-\$	1/12	115/208-230	1.1/0.5	1550	1	3.3"	1.0	60/50	Rev.	4.75

•Ball Bearing \$ Energy Efficient

Distribution Marketing
1325 Heil Quaker Blvd.
LaVergne, TN 37086
PH: 800-672-6495
FAX: 800-468-2062

www.centuryelectricmotor.com

©2012 Regal-Beloit Corporation Bulletin 6026A 6/2012


A Regal Brand

REGAL

Heatcraft Replacement Motors

Bohn, Chandler, Climate Control and Larkin

Stock No. 9721

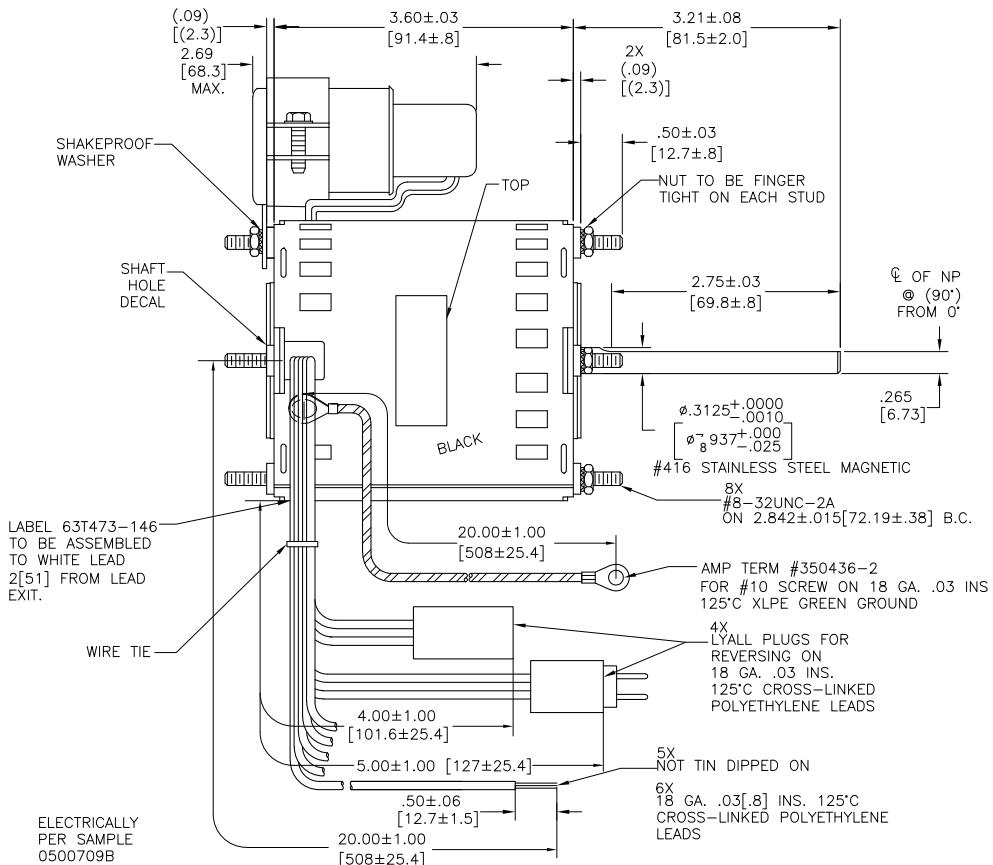

Replacement for:

- Emerson 9650, 9651, 9652, 9653, 9656, 9664 D1101, D1103, D1122, D1123, D1124, D1125, D1126, D1127, D1152, D1154, PD1125, PD1127, 7163-2113, 7163-3371 7190-0442, 7190-2084 7190-2255, 7190-2285 7190-2969 5KSM59ES2001 5KSM59JSK143S 5KSM59JS5036S 5KSM59LS2262AS
- GE
- OEM Part Numbers

25308601, 25309101
2531194, 2531195
7071061

Additional Heatcraft Replacement Motors

Bohn, Chandler, Climate Control and Larkin



HP	RPM	Speeds	Volts	Amps	Stock No.	Rot.	Capacitor	Shaft Diameter & Length	Motor Dia.	"A" Dim.	Cross Reference	Notes
1/20	1550	1	115	1.9	572A	CCWLE	Shaded Pole	5/16" x 3"	3-3/8"	3"	5034LS, 5008SS	4
1/15	1550	1	208-230	1.3	573A	CCWLE	Shaded Pole	5/16" x 3"	3-3/8"	3-5/8"	5034MS, 5008TS	4
1/20	1550	1	115	1.6	574	CWLE	Shaded Pole	5/16" x 2-1/2"	3-3/8"	2-3/4"	253-1194	4
1/20	1550	1	208-230	.81	575	CWLE	Shaded Pole	5/16" x 2-1/2"	3-3/8"	2-3/4"	253-1195	4
1/12	1550/1400	1	208-230	0.5	9720A	CWLE	Included	5/16" x 2-5/8"	3-3/8"	3-5/8"	D1125, 7190-0442 4,150 7190-2084, 9656 7071061, 25309101	
1/2	1075	1	208-230	4.8	992*	REV	Included	1/2" x 2-3/4"	5-5/8"	6-3/4"	5KCP39PGH728T S88-667 SCS0500H1-CPM120-3 D863	

Notes:

- 4. Supplied with Lead and Plug Assembly
- 150. Rated 50/60 Hz

- Ball Bearing

