

This End Should Be Installed Up  
(unless stackable unit or on pedestal)

- ✓ Save Space
- ✓ Save Energy
- ✓ Reduce Fire Hazard

**-WARNING-  
Sharp Edges**

In-O-Vate Technologies, Inc.

**the dryerbox®**




See W-L-7129 Firestop System in  
UL Directory Referenced From  
File Number R21933.  
Complete Marking on Product.





### Installation Instructions

- All standard American clothes dryers have an exhaust port in the center of the rear panel **at the very bottom**. Therefore, it is best to install the Dryerbox® as low as possible so that the bottom tab is at or slightly below the finished floor level (Diagram A)—not applicable if stackable unit or on a pedestal.
- Attach the Dryerbox® to stud and bottom plate at a minimum of 3 corners with drywall screws.
- We strongly recommend that the Dryerbox® be installed with the port up, although it will work lying on its side. Do not install with the port down unless the dryer is a stackable unit or on a pedestal. For downward exhaust direction use the “Down-Box™” Model 4D or 3D (more information online).
- Consider installing the 4 ¼” deep Dryerbox® (Model 425) into a 2x6 wall. This Model 350 is for 2x4 walls and exhibits a very oval shaped port on top to accommodate the compressed 4” snaplock pipe. The Model 425 has a round-hole port.
- When installing in an exterior frame wall, you should add insulation or duct board to the back-side of the box to minimize condensation and temperature transfer.
- To achieve a fire resistance rating (one-hour F & T) 2X6 wood framing is required. The Dryerbox unit must be installed in accordance with the UL Cabinet System listing. An extra layer of type-X drywall must be installed in the ID of the stud cavity in which the Dryerbox is located. Drywall must be attached to nailers (minimum 1” X 2”) located on the inside of the cavity wall studs. Secure nailers to wall framing at max 18 in. OC. The screws used to attach the inner layer of drywall shall be spaced a maximum of 18 inches apart. The entire depth of stud cavity with Dryerbox® must be filled with R19 fiberglass batt insulation. Additional insulation shall be added within the cavity as necessary to completely fill all voids around the periphery of the Dryer box and around the dryer vent pipe. Visit [www.dryerbox.com/firestop](http://www.dryerbox.com/firestop) for more detail.
- Gas line termination options: For black iron pipe, wrap vinyl tape around throat where it penetrates. For corrugated stainless steel tubing, secure the CSST Termination Fitting with a Jamb nut to securely affix the termination to the receptacle. The gas port can be enlarged or relocated easily with a step bit.
- The new Duct Support Tab (Diagram B) in top port will assist in maintaining the ideal penetration length of the 4” Snaplock rigid conduit of 2 inches. Create a “hook” by bending the tab at the weakened or scored locations. Break-away when duct is fully supported in-place. Seal penetration with foil tape or sealant caulk.
- The snaplock pipe can be vented straight up to a roof jack (Diagram C) or to a side-wall vent hood (Diagram D). **Do not turn this box upside down unless stackable unit or on pedestal.** Use the Model 4D or 3D to go down.
- Use a Roto-zip-bit router tool to cut the drywall leaving a **caulk joint** for the painter (Diagram E). It is best to **caulk or mud this void** (required for One-Hour Rating).
- The baseboard is best terminated with a tapered back-cut into the rim extension on either side of box (Diagram E).
- Exposed metal can be left unpainted or can be sprayed with an acrylic latex or oil-based (alkyd) paint when the rest of the wall, trim or baseboard is painted.

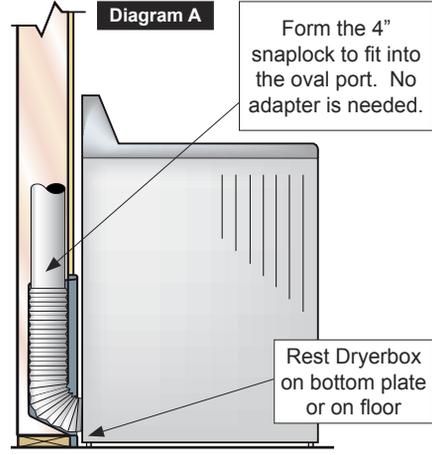

Install box as low as possible and as near to the center of the proposed dryer

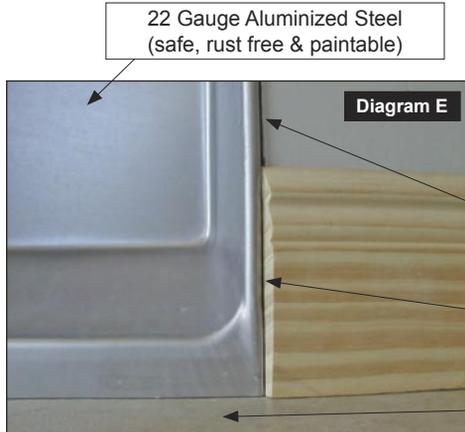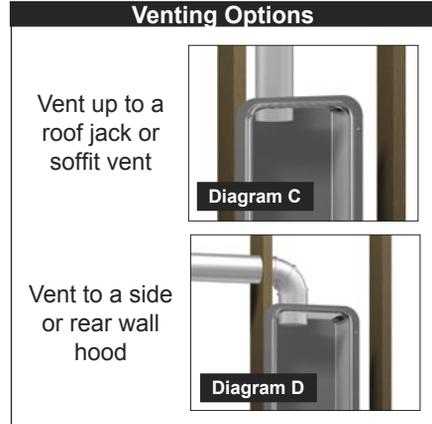

Zip-bit cut drywall and then caulk (preferred) or mud

Butt baseboard to rim and back-cut slightly

Install Dryerbox on bottom plate or floor near center of appliance



In-O-Vate Technologies, Inc.  
810 Saturn Street, Suite 21  
Jupiter, Florida 33477 USA

Proudly Manufactured in the USA  
US Patents 5,476,183 / 6,419,102  
and Others Pending

Available throughout the country from supply houses, lumber yards and hardware centers who carry heating, ventilation and air conditioning parts and supplies.

Distributed By:

Part Number:  
DB-350

AKA:  
DVB-350  
700-350  
IV 102003  
IDB350

**Model 350**  
(3 ½” Deep)



Locate a distributor near you by using our  
Online Store Locator at [www.dryerbox.com](http://www.dryerbox.com)

Toll Free:  
**(888) 443-7937**

More installation instructions at  
[www.dryerbox.com](http://www.dryerbox.com)