



Mighty-Right™

Right Angle Impact Driver



No. MR1- Right Angle Impact Driver Kit

Smallest, lightest, most maneuverable impact driver on earth!



Use the Mighty-Right $^{\text{TM}}$ to drive or remove sheet metal screws in tight spaces and blind spots encountered when installing metal duct work, including access into small diffuse boxes and equipment enclosures.

A unique LED light integrated into bit area sight line features a separate on / off switch.



An external belt-clip mounted battery pack stays clear of work and won't weigh down or unbalance this one hand tool operation.

With a fully charged battery, the Mighty-Right™ is capable of delivering 140 in-lbs. maximum torque to quickly seat sheet metal screws in steel up to 16 ga. (1/16" or 1.6 mm)

The 5-foot (1.5 m) battery cable provides generous reach.





Four low profile power bits are also supplied with kit: 1/4" and 5/16" Magnetic Hex bits and #1 and #2 Robertson square bits.





Quick-connect jacks with positive locking tabs won't pull out.











Ergonomic contours and a non-slip gripping area ensure easy one-hand operation.

A handy knockout hole permits easy removal of a lodged bit. The hex socket drive shaft accepts any 1/4" hex shank bit.

Specifications

Catalog Number	Description	Driver Length in. (mm)	Driver Weight lbs. (kg)	Batery Weight lbs. (kg)	Charger Accepted
MR1	Right Angle Impact Driver Kit	7 (178)	1.1 (0.5)	.5 (0.23)	Li-ion
Replaceme	nt Kit Components				
MR11	5 ft. (1.5 m) Battery Cable				
MR12	One-Hour, Li-ion Recharger				
MR13	7.2V, 1.5Ah Li-ion Battery Pack				
MR14	Low Profile 1/4" and 5/16" Hex Bits				
MR15	#1 and #2 Robertson Square Bits				

2-in-1

One hand operation with normal squeezing action provides enough pulling power to set all popular size rivets

(see specifications column below). 2-in-1 adjustment features a single long stroke for most hand riveting applications and a short "ratchet action" power stroke for setting larger diameter rivets. Outside jaw-grip adjustment wheel opens and closes jaws with fingertip ease to fit any size mandrel and to obtain maximum stroke efficiency. Professional slim nose allows 2-in-1 to go where other hand riveters cannot. Ideal for reaching into corners and recessed areas. Three nosepieces 1/8", 5/32" and 3/16" included with tool. Nosepieces are stored in handle. Heavy duty all steel construction insures long life and minimum wear. Polished finish, nickel-chrome plated. Red vinyl cushion grip and hand stop.



LONG STROKE Bolt in upper hole for easy pulling rivets in one pull.



SHORT "RATCHET ACTION" POWER STROKE Bolt in lower hole for hard pulling rivets in several easy pulls.



Economy Hand Riveter

Lightweight, compact size and slim nose projection allows this riveter to go wherever the work is.

Four rivet nosepieces: 3/32", 1/8", 5/32", 3/16" store in handle. Ideally suited for blind riveting applications in aluminum windows, gutter and downspout. Not for use with 5/32" or 3/16" steel rivets (steel rivets larger than 3.2 mm). Spring return handles and comfortable contour grip make operation fast and easy. Just open handles and insert rivet into tool until flange touches nosepiece. Squeeze handles slightly to allow jaws to grip rivet mandrel. Insert rivet into pre-drilled work to be fastened and squeeze handles until mandrel snaps. Release grip on handles and mandrel will drop out front end of tool when tilted.

> Rugged steel construction with black paint finish and comfortable vinyl grip. Secure handle latch makes this tool easy to fit in pouch or pocket.



Specifications

•				
Catalog		Capacities	Length	Net Wt.
Number	Description	in. (mm)	in. (mm)	oz. (g)
2-in1	2-in-1 Hand Riveter	3/32 thru- 3/16 (2.4 - 4.8) steel rivets / 3/32 thru- 5/32 (2.4 - 4.0) stainless steel rivets	8 (203)	20 (567)
CR18	Economy Hand Riveter	3/32 thru 1/8 (2.4 - 3.2) steel rivets	8 (203)	22 (624)
Replaceme	nt Accessories and Parts for 2-i	n-1 Hand Riveter		
ER41	Jaws			
ER44	3/16" nosepiece			
ER45	1/8" nosepiece			
ER46	5/32" nosepiece			
HR3-7	Adjustment Rod assembly			

Jobber Drill Sets









General purpose drills. 118° conventional point angle allows deep drilling in a variety of materials including metal.



Sheet metal drills with 135° split point design bite into metal precisely where wanted - will not wander.



Two Points for twice the life, twice the convenience! Available in Bulk Packs!

Specifications

Catalog Number	Description	Set Contents	Capacity	Length in.
FJ13S	13 Piece Jobber Drill Set	Fractional sizes in metal DRILDEX container Sizes: 1/16 to 1/4" x 64ths		
FJ60S	60 Piece Jobber Wire Gauge Set	Wire gauge sizes in metal DRILDEX container Sizes: 1 to 60		
FJ6180	20 Piece Orifice Drill Set	Wire gauges sizes for drilling or cleaning oil and gas orifices. Metal DRILDEX container. Sizes: 61 to	o 80. Includes pin vis	se.
PV1	Pin Vise	_	Ga. sizes 60-97	3"

High Speed Jobber Length Drills (Fractional Sizes)

Catalog Number	Description	Decimal Equvalent in.	Length Overall in.	Length of Twist in.	Package Size
FJ1/8	High Speed Jobber Length Drill Bit	.1250	2-3/4	_	-
FJ3/16	High Speed Jobber Length Drill Bit	.1875	3-1/2	_	_
FJ1/4	High Speed Jobber Length Drill Bit	.2500	4	=	_
FJ5/16	High Speed Jobber Length Drill Bit	.3125	4-1/2	_	-
FJ3/8	High Speed Jobber Length Drill Bit	.3750	5	_	_
FJ1/2	High Speed Jobber Length Drill Bit	.5000	6		_
Sheet I	Metal Drills (Fractional Sizes)				
FS1/8	Sheet Metal Drill Bit	.1250	1-7/8	_	1
FS3/16	Sheet Metal Drill Bi	.1875	2-3/16	_	1
FS1/4	Sheet Metal Drill Bit	.2500	2-1/2	_	1
FS3/8	Sheet Metal Drill Bit (FS Series with 1/4" reduced Shank)	.3750	3-1/8	_	1
FS1/2	Sheet Metal Drill Bit (FS Series with 1/4" reduced Shank)	.5000	3-3/4		1
PFS1/8	Sheet Metal Drill Bit (Polished)	.1250	1-7/8	_	12
PFS30	Sheet Metal Drill Bit (Polished)	.1285	1-15/16		12
PFS1/4	Sheet Metal Drill Bit (Polished)	.2500	2-1/2	_	12
Double	Ender Sheet Metal Drills				
DE1/8	Double Ender Sheet Metal Drill Bit (Polished)	.1250	2	1/2	12
DE1/8B	Bulk Pack Double Ender Sheet Metal Drill Bits (Polished)	.1250	2	1/2	144
DE30	Double Ender Sheet Metal Drill Bit (Polished)	.1285	2	1/2	12
DE30B	Bulk Pack Double Ender Sheet Metal Drill Bits (Polished)	.1285	2	1/2	144
DE9/64	Double Ender Sheet Metal Drill Bit (Polished)	.1406	1-15/16	1/2	12
DE3/16	Double Ender Sheet Metal Drill Bit (Polished)	.1875	2-3/16	1/2	12
DE1/4	Double Ender Sheet Metal Drill Bit (Polished)	.2500	2-1/2	1/2	12
NDE1/8	Double Ender Sheet Metal Drill Bit (Black Nitrided)	.1250	2	1/2	12
NDF30	Double Ender Sheet Metal Drill Bit (Black Nitrided)	.1285	2	1/2	12

Step Drills

A unique double flute design assures the penetration of soft or thin materials at the proper speed. Drill hole sizes from 1/8" to 1" in sheet metal without burring or deforming stock or threading drill bit.

Malco Step Drills actually deburr as they drill. Perfect for use as a "hole-opening" reamer. They can also be used for making round holes from slots or intersecting holes. Made of industrial grade high speed steel. Malco Step Drills are heat treated and tempered to assure maximum strength for long wearing rugged use. Completely resharpenable.









Spade Wood Type Bits

Unique designed ground points and cutting edges drill faster, cleaner holes, using less power than standard spade type bits. Cut straight or angled holes in soft and hard woods, plus formica, plaster, chipboard, foam core material, many non-metallic building sidings and foam insulation. Made of one-piece special heat treated tool grade steel. Six "flat" 1/4" shank fits securely in conventional chucks. Easy to spot "size marking" is stamped on head. Bits also feature "head hole" for convenient storage and wire pulling. Resharpenable with saw file or grinder. Available individually or in sets.



Carbide Tipped Rotary-Percussion Bits



Use in any rotary or rotary percussion drilling device for unexcelled performance in brick, tile, granite, concrete, masonry and other similar hard and dense materials. Brazed tungsten carbide tips have 120° chamfer and are specially tempered for strength and long life.

Specifications

Catalog Number	Description	Depth Each Step	Elect. Drill Size	Pilot Hole Required
UB1	Drills 13 hole sizes from 1/8" to 1/2" diameter in 1/32" (0.79) increments.	1/8"	1/4"	No
UB3	Drills 9 hole sizes from 1/4" to 3/4" diameter in 1/16" increments.	1/8"	3/8"	No
<u>UB11</u>	Drills 11 hole sizes from 1/4" to 7/8" diameter for creating 1/2" knock outs.	N/A	3/8	No
UB20	Drills 8 hole sizes from 9/16" to 1" diameter in 1/16" increments.	1/8"	3/8"	1/2"

Spade Type Wood Bits

Catalog		Overall		Shank
Number	Description	Length	Diameter	Diameter
WB38	Spade Type Wood Bit	_	3/8"	
WB12	Spade Type Wood Bit	_	1/2"	
WB58	Spade Type Wood Bit	_	5/8"	
WB34	Spade Type Wood Bit	_	3/4"	_
WB78	Spade Type Wood Bit	_	7/8"	
WB1	Spade Type Wood Bit	_	1"	
WB118	Spade Type Wood Bit	_	1-1/8"	
WB114	Spade Type Wood Bit	_	1-1/4"	
WB138	Spade Type Wood Bit	_	1-3/8"	
WB112	Spade Type Wood Bit	_	1-1/2"	
WB6K	6 piece set: 3/8", 1/2", 5/8", 3/4", 7/8" and	1"		

Carbide Tipped Rotary-Percussion Bits

Catalog		Nominal	Bit	Shank
Number	Description	Overall Length	Diameter	Diameter
RP01	Carbide Tipped Rotary Percussion Bit	3"	1/8"	1/8"
RP04	Carbide Tipped Rotary Percussion Bit	3-5/16"	3/16"	3/16"
RP09	Carbide Tipped Rotary Percussion Bit	4"	1/4"	1/4"
RP10	Carbide Tipped Rotary Percussion Bit	6"	1/4"	1/4"
RP18	Carbide Tipped Rotary Percussion Bit	4-3/4"	5/16"	5/16"
RP46	Carbide Tipped Rotary Percussion Bit	6"	1/2"	3/8"

Regular and Gripped



Designed for maintenance, electrical and assembly continuous use applications.

Keystone and Phillips drivers are also ideal for driving hardened screw heads in sheet metal. Individually heat treated blade tips are precision ground for perfect fit in screw head. Handles are shockproof and shatterproof. Driver handles and blades are joined securely and will not turn or come loose. Driver construction assures many years of reliable, superior performance.









Specifications

Regular Grip Screwdrivers

Catalog Number	Description	Blade Diameter in. (mm)	Blade Length in. (mm)	Recomm. Screw #
S44	Square Shank	1/4 (6.4)	4 (102)	10-12
S56	Square Shank	5/16 (7.9)	6 (152)	12-16
S68	Square Shank	3/8 (9.5)	8 (203)	16-20
S612	Square Shank	3/8 (9.5)	12 (305)	16-20
K44	Round Shank Keystone	1/4 (6.4)	4 (102)	10-12
K56	Round Shank Keystone	5/16 (7.9)	6 (152)	12-16
K68	Round Shank Keystone	3/8 (9.5)	8 (203)	16-20
C22	Electrical / Cabinet Style	1/8 (3.2)	2 (51)	2-5
C22M	Electrical Style	1/8 (3.2)	2 (51)	2-5

Cushioned Grip Screwdrivers

Catalog Number	Description	Blade Diameter in. (mm)	Blade Length in. (mm)	Recomm. Screw #
S44C	Square Shank (Gripped)	1/4 (6.4)	4 (102)	10-12
S56C	Square Shank (Gripped)	5/16 (7.9)	6 (152)	12-16
S68C	Square Shank (Gripped)	3/8 (9.5)	8 (203)	16-20
K41C	Round Shank Keystone (Gripped)	1/4 (6.4)	1-1/2 (38)	10-12
K44C	Round Shank Keystone (Gripped)	1/4 (6.4)	4 (102)	10-12
K56C	Round Shank Keystone (Gripped)	5/16 (7.9)	6 (152)	12-16
K68C	Round Shank Keystone (Gripped)	3/8 (9.5)	8 (203)	16-20
C33C	Electrical / Cabinet Style (Gripped)	3/16 (4.8)	3 (76)	6-9
C36C	Electrical / Cabinet Style (Gripped)	3/16 (4.8)	6 (152)	6-9
C45C	Electrical / Cabinet Style (Gripped)	1/4 (6.4)	5 (127)	10-12
C24C	Electrical Style (Gripped)	1/8 (3.2)	4 (102)	2-5
C26C	Electrical Style (Gripped)	1/8 (3.2)	6 (152)	2-5
C28C	Electrical Style (Gripped)	1/8 (3.2)	8 (203)	2-5

Screwdrivers

Regular / Gripped and Reversible



7 Piece Combination Screwdriver Set

Gripped

Most popular sizes

of Keystone, Cabinet Style and Phillips screwdrivers packaged in a vinyl see-thru pouch.

SK2C

Phillips Head High Polish Finish P42C P33 P33C

6 in 1 Reversible Driver

2 combination bits and 2 hex barrel openings drive 6 different head styles / sizes.

Bit shank firmly locks into handle barrel. Driver bits are individually protected with black oxide. Barrel is chrome plated to protect against rust.









Specifications

Regular Grip Screwdrivers

Catalog		Blade Diameter	Blade Length	Recomm.
Number	Description	in. (mm)	in. (mm)	Screw #
P44	Phillips Head	1/4 (6.4)	4 (102)	No. 2
P56	Phillips Head	5/16 (7.9)	6 (152)	No. 3

6 in 1 Reversible Driver

6 IN 1	Reversible Driver
Catalog	
Number	Description
RD6	Driver with 2 combination bits and 2 hex barrel openings

Cushioned Grip Screwdrivers

Catalog Number	Description	Blade Diameter in. (mm)	Blade Length in. (mm)	Recomm. Screw #
P33C	Phillips Head (Gripped)	3/16 (4.8)	3 (76)	No. 1
P42C	Phillips Head (Gripped)	1/4 (6.4)	1-1/2 (38)	No. 2
P44C	Phillips Head (Gripped)	1/4 (6.4)	4 (102)	No. 2
P56C	Phillips Head (Gripped)	5/16 (7.9)	6 (152)	No. 3
SK2C	7 Piece Combination Screwdriver S	et (Gripped) – Kit d	contains following	:
K41C	Round Shank Keystone (Gripped)	1/4 (6.4)	1-1/2 (38)	10-12
K44C	Round Shank Keystone (Gripped)	1/4 (6.4)	4 (102)	10-12
K56C	Round Shank Keystone (Gripped)	5/16 (7.9)	6 (152)	12-16
C24C	Electrical Style (Gripped)	1/8 (3.2)	4 (102)	2-5
C33C	Electrical / Cabinet Style (Gripped)	3/16 (4.8)	3 (76)	6-9
P33C	Phillips Head (Gripped)	3/16 (4.8)	3 (76)	No. 1
P44C	Phillips Head (Gripped)	1/4 (6.4)	4 (102)	No. 2

Magnetic

Screwdrivers

Magnetized tips hold screws for easier installation in tight quarters when fastening inside profiles, around existing installations or reaching into cabinet enclosures.

Hardened chrome-vanadium steel blades offer maximum torque capacity. Cushioned handles offer a firm, ergonomically correct grip. And a handy hex-shaped base on selected round shank blades can be used with a wrench for added leverage. Satin chrome coating on blade shafts resists corrosion and a strong handle-to-shaft connection assures long service life.





Specifications

Square Shank Keystone Screwdrivers

Catalog Number	Description	Blade Diameter in. (mm)	Blade Length in. (mm)	Recomm. Screw #
MS44C	Square Shank Keystone (Cushioned)	1/4 (6.4)	4 (102)	10-12
MS56C	Square Shank Keystone (Cushioned)	5/16 (7.9)	6 (152)	12-16
MS68C	Square Shank Keystone (Cushioned)	3/8 (9.5)	8 (203)	16-20

Round Shank Keystone Screwdrivers

Catalog		Blade Dia.	Blade Lgth.	Recomm.	Hex.
Number	Description	in. (mm)	in. (mm)	Screw #	Base
MK41C	Round Shank Keystone (Cushioned)	1/4 (6.4)	1-1/2 (38.1)	10-12	Yes
MK44C	Round Shank Keystone (Cushioned)	1/4 (6.4)	4 (102)	10-12	Yes
MK56C	Round Shank Keystone (Cushioned)	5/16 (7.9)	6 (152)	12-16	Yes
MK68C	Bound Shank Keystone (Cushioned)	3/8 (9.5)	8 (203)	16-20	Yes

Electrical / Cabinet Style Screwdrivers

Catalog		Blade Dia.	Blade Lgth.	Recomm.	Hex.
Number	Description	in. (mm)	in. (mm)	Screw #	Base
MC22C	Electric / Cabinet Style (Cushioned)	1/8 (3.2)	2 (51)	2-5	
MC24C	Electric / Cabinet Style (Cushioned)	1/8 (3.2)	4 (102)	2-5	
MC33C	Electric / Cabinet Style (Cushioned)	3/16 (4.8)	3 (76)	6-9	Yes
MC36C	Electric / Cabinet Style (Cushioned)	3/16 (4.8)	6 (152)	6-9	Yes
MC45C	Electric / Cabinet Style (Cushioned)	1/4 (6.4)	5 (127)	10-12	Yes

Phillips Head Screwdrivers

	Catalog		Blade Dia.	Blade Lgth.	Recomm.	Hex.
ĺ	Number	Description	in. (mm)	in. (mm)	Screw #	Base
i	MP33C	Phillips Head (Cushioned)	3/16 (4.8)	3 (76)	No. 1	Yes
	MP44C	Phillips Head (Cushioned)	1/4 (6.4)	4 (102)	No. 2	Yes



Connectivity

re-defigned

Introducing New and Improved Malco Nut Drivers and Hex Drivers with CONNEXT™ Quick-Change Handles!

CONNEXT™ Handles from Malco have been combined with precision-fit and hardened Malco Chuck Driver components to offer the ultimate in Nut Driver and Hex Driver durability and versatility.



 $\mathsf{CONNEXT}^{\scriptscriptstyle\mathsf{TM}}\ \mathsf{Quick}\text{-}\mathsf{Change}\ \mathsf{Handles}\ \mathsf{are}\ \mathsf{equipped}$ with a quick-connect holder mechanism to accept any 1/4-inch shank chuck driver.

Quick Connect Holder

Color Coded for easy size recognition



Quick-Change

Handles

come in full grip and stubby sizes and are equipped with a quick-connect holder mechanism to accept any 1/4-inch shank chuck driver.

Hollow Hex Chuck Drivers with 1/4-inch power insert shanks, are available in 3-inch and big 6-inch lengths. And all Malco Hex Chuck drivers are now COLOR CODED for easy size identification whether installed on a power drill or used with a CONNEXTTM Handle.



Specifications

CONNEXT™ Hollow Nut Drivers

Catalog Number	Description	Color Coded	Hex Opening in.	Hollow Depth in. (mm)	Insert Dia. in. (mm)	Nose Dia. in. (mm)	Holder Dia. in. (mm)	Shaft Total Lgth. in. (mm)	O/A Lgth. in. (cm)	Shaft Replacement #
CHD1	Connext™ Hollow Nut Driver	•	1/4"	1-1/2" (38)	1/4" (6)	7/16" (11)	11/16" (18)	3-3/8" (86)	7-1/2" (19)	HD1
CHD2	Connext™ Hollow Nut Driver	•	1/4"	3" (76)	1/4" (6)	7/16" (11)	11/16" (18)	6-7/8" (175)	10-1/2" (27)	HD2
CHD3	Connext™ Hollow Nut Driver	0	5/16"	1-1/2" (38)	1/4" (6)	1/2" (13)	11/16" (18)	3-3/8" (86)	7-1/2" (19)	HD3
CHD4	Connext™ Hollow Nut Driver	0	5/16"	3" (76)	1/4" (6)	1/2" (13)	11/16" (18)	6-7/8" (175)	10-1/2" (27)	HD4
CHD5	Connext™ Hollow Nut Driver	•	3/8"	1-1/2" (38)	1/4" (6)	9/16" (14)	11/16" (18)	3-3/8" (86)	7-1/2" (19)	HD5
CHD6	Connext™ Hollow Nut Driver	•	3/8"	3" (76)	1/4" (6)	9/16" (14)	11/16" (18)	6-7/8" (175)	10-1/2" (27)	HD6
CONN Catalog Number	EXT [™] Magnetic Long Ha	Color Coded	rivers Reaction	Hex Opening in.	Insert Dia. in. (mm)	Nose Dia. in. (mm)	Holder Dia. in. (mm)	Shaft Total Lgth. in. (mm)	O/A Lgth. in. (cm)	Shaft Replacement #
HHD1	Connext™ Long Hand Driver	•	Magnetic	1/4"	1/4" (6)	7/16" (11)	11/16" (18)	6-7/8" (175)	10-1/2" (27)	MSHXL14
HHD2	Connext™ Long Hand Driver	•	Magnetic	5/16"	1/4" (6)	1/2" (13)	11/16" (18)	6-7/8" (175)	10-1/2" (27)	MSHXL516
HHD3	Connext™ Long Hand Driver	0	Magnetic	3/8"	1/4" (6)	9/16" (14)	11/16" (18)	6-7/8" (175)	10-1/2" (27)	MSHXL38
CONN	EXT [™] Magnetic Standaı	d Len	gth Hand	Drivers						
HHD1S	Connext™ Standard Lgth. Hand Driver	•	Magnetic	1/4"	1/4" (6)	7/16" (11)	11/16" (18)	3" (76)	7-1/8" (18)	MSHL14
HHD2S	Connext™ Standard Lgth. Hand Driver	•	Magnetic	5/16"	1/4" (6)	1/2" (13)	11/16" (18)	3" (76)	7-1/8" (18)	MSHL516
HHD3S	Connext™ Standard Lgth. Hand Driver	<u> </u>	Magnetic	3/8"	1/4" (6)	9/16" (14)	11/16" (18)	3" (76)	7-1/8" (18)	MSHL38
CONN	EXT [™] Magnetic Stubby	Hand	Drivers							
HHD1T	Connext™ Stubby Hand Driver	•	Magnetic	1/4"	1/4" (6)	7/16" (11)	11/16" (18)	2-1/4" (57)	4-1/8" (10)	MSH14
HHD2T	Connext™ Stubby Hand Driver	•	Magnetic	5/16"	1/4" (6)	1/2" (13)	11/16" (18)	2-1/4" (57)	4-1/8" (10)	MSH516
HHD3T	Connext™ Stubby Hand Driver		Magnetic	3/8"	1/4" (6)	9/16" (14)	11/16" (18)	2-1/4" (57)	4-1/8" (10)	MSH38

CONNEXT



Hollow Hex Chuck Drivers



3" (76 mm) Hollow

Over All













CONNEXT[™] Quick Change Handles

Clear, molded acetate GRIPS are shock-proof, shatter-proof and fluted to fit any hand.

Available in Tubs and Boxes



Magnetic Hex Drivers 1/4 and 5/16 sizes also available in bulk tubs of 100.



Magnetic Hex Drivers Long Style 1/4 and 5/16 sizes also available in bulk tubs of 50.



Magnetic Hex Drivers Extra Long Style 1/4 and 5/16 sizes also available in bulk boxes of 50.

1/4" Hex Shank Phillips Power Bits and Standard Bits



Magnetic Bit Holder for 1/4" Hex Shank Insert Bits



Quick Change Hex Adapter

Accepts 1/4" hex power bits. Installs into chuck of a standard 3/8" power drill. Hex power bits can then be inserted or removed instantly without a key, by retracting the adapter sleeve. Tempered steel. Black finish.



Power Bit Extensions

Ball Bearing Lock Big 6" and 10" lengths



Accepts 1/4" hex power bits. Ball Bearing on holder provides a positive lock on 1/4" hex shank power bits. Tempered steel.

Specifications

CONNEXT™ Quick-Change Handles

Catalog		Grip Dia.	Grip Lgth.	Holder Opening	Holder Dia.	Holder Lgth.	O/A Lgth.
Number	Description	in. (mm)	in.	in.	in. (mm)	in. (mm)	in. (cm)
Connext1	Connext1™ Quick-Change Handle	1-1/8" (29)	4-1/8" (105)	1/4"	11/16" (18)	1-1/8" (29)	5-1/4" (133)
Connext2	Connext2™ Quick-Change Handle	1-1/8" (29)	1-7/8" (48)	1/4"	11/16" (18)	1-1/8" (29)	3-1/8" (79)

CONNEXT™ Hollow Hex Chuck Drivers

Catalog	Color	Hex Opening	Hollow Depth	insert Dia.	Nose Dia.	O/A Lgtn.
Number	Coded	in.	in. (mm)	in. (mm)	in. (mm)	in. (cm)
HD1	•	1/4"	1-1/2" (38)	1/4" (6)	7/16" (11)	3" (76)
HD2	•	1/4"	3" (76)	1/4" (6)	7/16" (11)	6" (152)
HD3		5/16"	1-1/2" (38)	1/4" (6)	1/2" (13)	3" (76)
HD4	<u> </u>	5/16"	3" (76)	1/4" (6)	1/2" (13)	6" (152)
HD5	•	3/8"	1-1/2" (38)	1/4" (6)	9/16" (14)	3" (76)
HD6	•	3/8"	3" (76)	1/4" (6)	9/16" (14)	6" (152)

CONNEXT™ Short Chuck Drivers

Catalog Color Number Coded	Hex Opening in.	Insert Dia. in. (mm)	Nose Dia. in. (mm)	O/A Lgth. in. (cm)
MSH14	1/4"	1/4" (6)	7/16" (11)	1-3/4" (44)
MSH14T (Bulk Tub of 100)	1/4"	1/4" (6)	7/16" (11)	1-3/4" (44)
MSH516 O	5/16"	1/4" (6)	1/2" (13)	1-3/4" (44)
MSH516T (Bulk Tub of 100)	5/16"	1/4" (6)	1/2" (13)	1-3/4" (44)
MSH38	3/8"	1/4" (6)	9/16" (14)	1-3/4" (44)

1/4" Hex Shank Power Bits

Catalog			Shank Dia.	O/A Lgth.
Number	Description	Point Size	in.	in.
MBLP2	Hex Shank Power Bit	3	1/4"	1-15/16"
MBLP3	Hex Shank Power Bit	2	1/4"	1-15/16"
MBLP4	Hex Shank Power Bit	2	1/4"	2-3/4"
MBSP2	Hex Shank Short Bit	2	1/4"	1"

1/4" Hex Shank Insert Bits Holder

Cat	alog		Hex Opening	Shank Dia.	Nose Dia.	O/A Lgth.
Nur	nber	Description	in.	in.	in.	in.
МВ	H14	Bit Holder	1/4"	1/4"	7/16"	3"

CONNEXT[™] Long Chuck Drivers

Catalog	Color	Hex Opening	Insert Dia.	Nose Dia.	O/A Lgth.
Number	Coded	in.	in. (mm)	in. (mm)	in. (cm)
MSHL14	•	1/4"	1/4" (6)	7/16" (11)	2-9/16" (65)
MSHL14T	(Bulk Tub of 100)	1/4"	1/4" (6)	7/16" (11)	2-9/16" (65)
MSHL516	s •	5/16"	1/4" (6)	1/2" (13)	2-9/16" (65)
MSHL516	ST (Bulk Tub of 100)	5/16"	1/4" (6)	1/2" (13)	2-9/16" (65)
MSHL38	•	3/8"	1/4" (6)	9/16" (14)	2-9/16" (65)
MSHL716	5	7/16"	1/4" (6)	11/16" (18)	2-9/16" (65)

CONNEXT™ Extra Long Chuck Drivers

Catalog	Color	Hex Opening	Insert Dia.	Nose Dia.	O/A Lgth.
Number	Coded	in.	in. (mm)	in. (mm)	in. (cm)
MSHML14	•	1/4"	1/4" (6)	7/16" (11)	4" (102)
MSHXL14	•	1/4"	1/4" (6)	7/16" (11)	6" (152)
MSHXL14T	Γ (Bulk Box of 50)	1/4"	1/4" (6)	7/16" (11)	6" (152)
MSML516	•	5/16"	1/4" (6)	1/2" (13)	4" (102)
MSHXL516	₃	5/16"	1/4" (6)	1/2" (13)	6" (152)
MSHXL516	ST (Bulk Box of 50)	5/16"	1/4" (6)	1/2" (13)	6" (152)
MSHXL38	•	3/8"	1/4" (6)	9/16" (14)	6" (152)

Power Bit Extensions

Catalog		Hex Opening	Shank Dia.	Nose Dia.	O/A Lgth.
Number	Description	in.	in.	in.	in.
BHE6	Power Bit Extension	1/4"	1/4"	9/16"	6"
RHE10	Power Rit Extension	1///"	1///"	9/16"	10"

Quick Change Hex Adapter

Catalog		Hex Opening	Shank Dia.	Bore Depth	Sleeve Dia.	O/A Length
Number	Description	in.	in.	in.	in.	in.
HAD1	Hex Adapter	1/4"	3/8"	7/8"	7/8"	1-3/4"

Cushioned-Gripped

"T" Handle Hex Key Sets

Extra long, hardened and tempered alloy steel "T" Handle hex keys provide extra reach and extra leverage. Plus, vinyl cushion grips and comfort provide added torque.

- Big 6" and 9" sets consist of 8 sizes: 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32" and 1/4".
- Kits are packaged in reusable, clear vinyl pouches with velcro-tab closures.
- Red vinyl grips imprinted with sizes make these keys easy to spot on the job and easy to retrieve from your tool kit or tool box.
- Rust-resistant finish on hex shafts assures long service life.
- Popular 1/8", 5/32" and 3/16" sizes are also available individually.





Specifications		6"
Catalog Number	Description	0
WT6SG	6" Long T Handle Keys, 8 Sizes (3/32"-1/4")	
Individual 6" Long Wrenches	8	
WT618G	1/8" T-Hex Key 6" long	
WT6532G	5/32" T-Hex Key 6" long	
WT6316G	3/16" T-Hex Key 6" long	


Catalog		9"
Number	Description	
WT9SG	9" Long T Handle Keys, 8 Sizes (3/32"-1/4")	
Individual 9" Long Wrench	es	
WT918G	1/8" T-Hex Key 9" long	
WT9532G	5/32" T-Hex Key 9" long	
WT9316G	3/16" T-Hex Key 9" long	

Folding

Hex Key Sets

Produced from tough alloy steel

Catalog Number	W19	W29	W45	W48
	Small	Deluxe	Large	Extra
Description	Pocket	Pocket	Sizes	Long
Handle Length	3-5/8"	4-1/4"	5-1/4"	5-1/4"
Number of Keys	9	9	5	8
ı	Hex Sizes - \	Width Acros	s Flats	
	.050"	-	-	-
	1/16"	-	_	_
	5/64"	5/64"	_	-
	3/32"	3/32"	_	3/32"
	7/64"	7/64"	_	7/64"
	1/8"	1/8"	_	1/8"
	9/64"	9/64"	_	9/64"
	5/32"	5/32"	-	5/32"
	3/16"	3/16"	3/16"	3/16"
	_	7/32"	7/32"	7/32
		1/4"	1/4"	1/4"
	_	_	5/16"	_
	_	_	3/8"	_

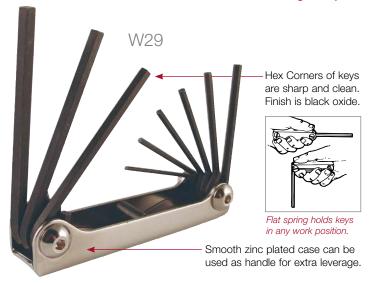

Ball Tip "L" Wrench Set

Wrench Set stores in Handy reusable case.



WB12S

TWO TOOLS IN ONE! Standard Hex end for maximum torque. Ball end for angles.

Tough alloy steel. Black oxide Finish



Refrigeration Lengths

"L" Hex Keys

Available in 6" and 12" long series. Tough alloy steel, black oxide finish, In reusable vinyl pouch.





Specifications

Catalog	
Number	Description
WBL12S	12 Piece Ball Tip Wrench Set
W19	9 Piece Hex Key Set (.050"-3/16")
W29	9 Piece Hex Key Set (5/64"-1/4")
W45	5 Piece Hex Key Set (3/16"-3/8")
W48	8 Piece Hex Key Set (3/32"-1/4")
W6	6" 9 sizes: 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32 and 1/4"
W12	12" 7 sizes: 5/64, 3/32, 1/8, 5/32, 3/16, 7/32 and 1/4"
Individual "L" 12" Long Hex Ke	y Wrenches
W12532	12" Long hex key size 5/32"