

Packless Industries

P.O. Box 20668 , Waco, Texas 76702

1-800-347-4859 . (254) 666-7893

<http://www.packless.com>

Product #:

VAFS-6

**Vibration Absorbers - Stainless Steel
(3/8 - 1-5/8)**

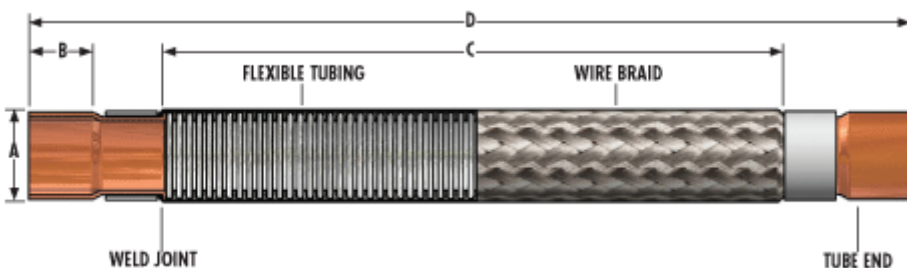
- Eight models available to fit copper tubing from 3/8 through 1 5/8 inches O.D.
- Each unit pressure and vacuum tested, cleaned, dehydrated and sealed in plastic film
- C-ULApproved

Notes:

1. Compatible with all HFC, HCFC & CFC refrigerants.
2. C-UL-US recognized, file # SA-2575.
3. Due to a continuous program of product improvement, specifications and dimensions are subject to change without notice.
4. For unusual installations, Packless vibration absorbers can be provided in special lengths. Please consult factory with requirements.



[+] Enlarge

Downloads
[Installation Recommendations](#)
**Specifications**

Product #	VAFS-6
Actual I.D. in.	3/4
Flex Tubing I.D. A in. (mm.)	5/8 (15.9)
C in. (mm.)	7 7/16 (188.9)
D in. (mm.)	10 1/2 (266.7)
Max. Working Pressure psig. (bar.)	650 (45)
B in. (mm.)	5/8 (15.9)
Shipping Weight lbs. (kgs.)	0.375 (.17)
Burst Pressure psig. (bar.)	3250 (224)

Options

-- None --

Accessories

-- None --

[Print...](#)
[Close](#)