






ELECTRICAL MERCHANDISING PROGRAM



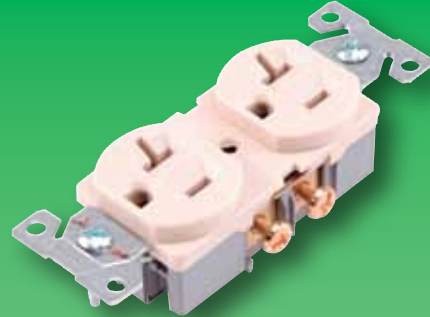


Panel A


Panel B

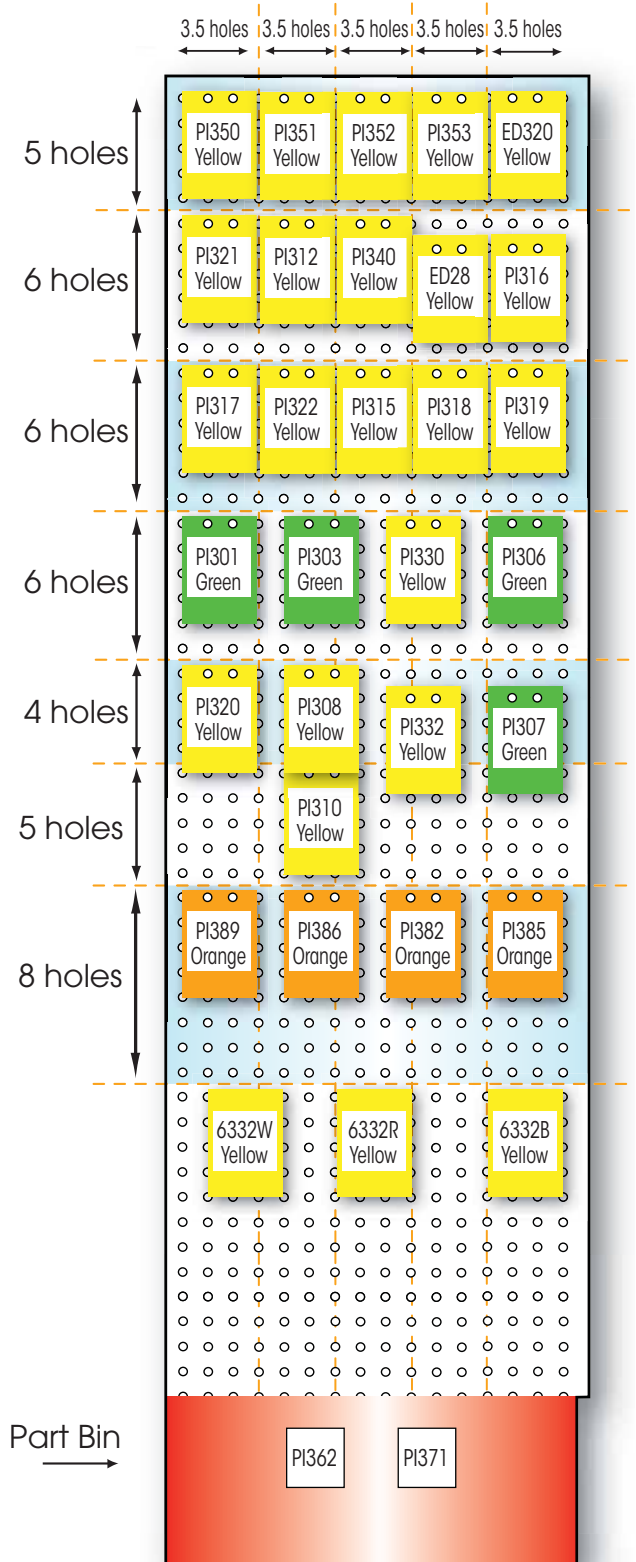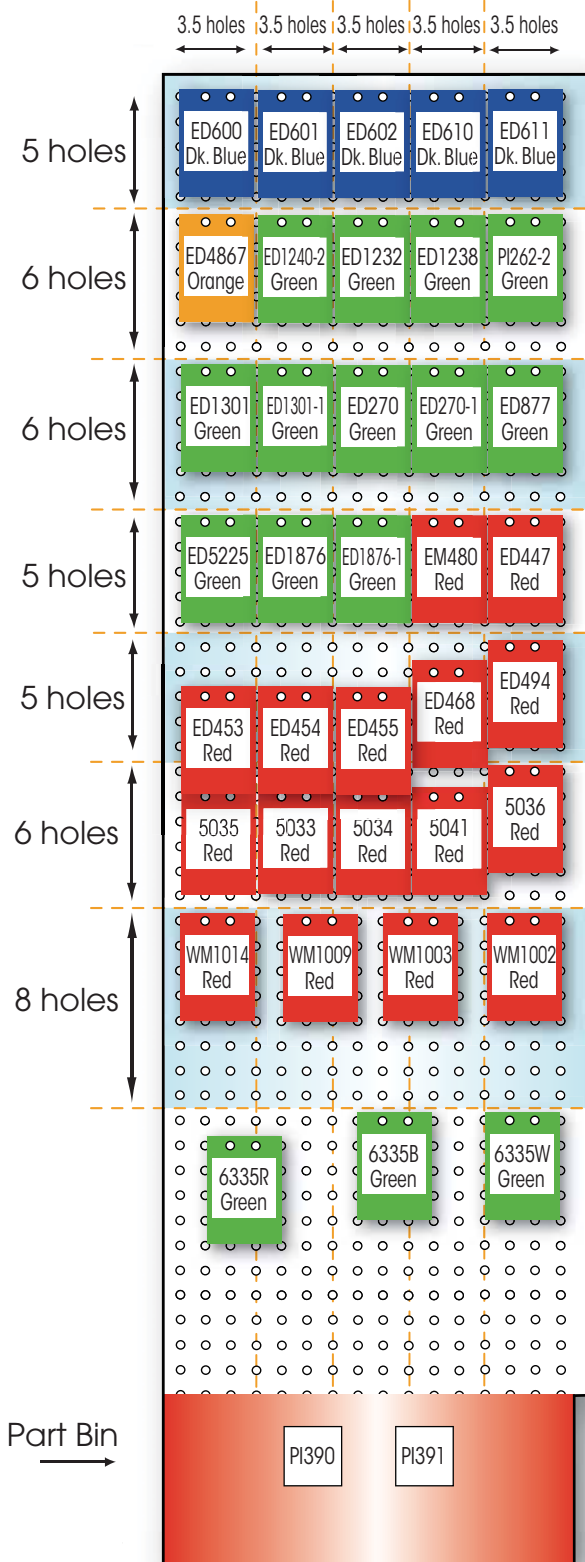

Panel C

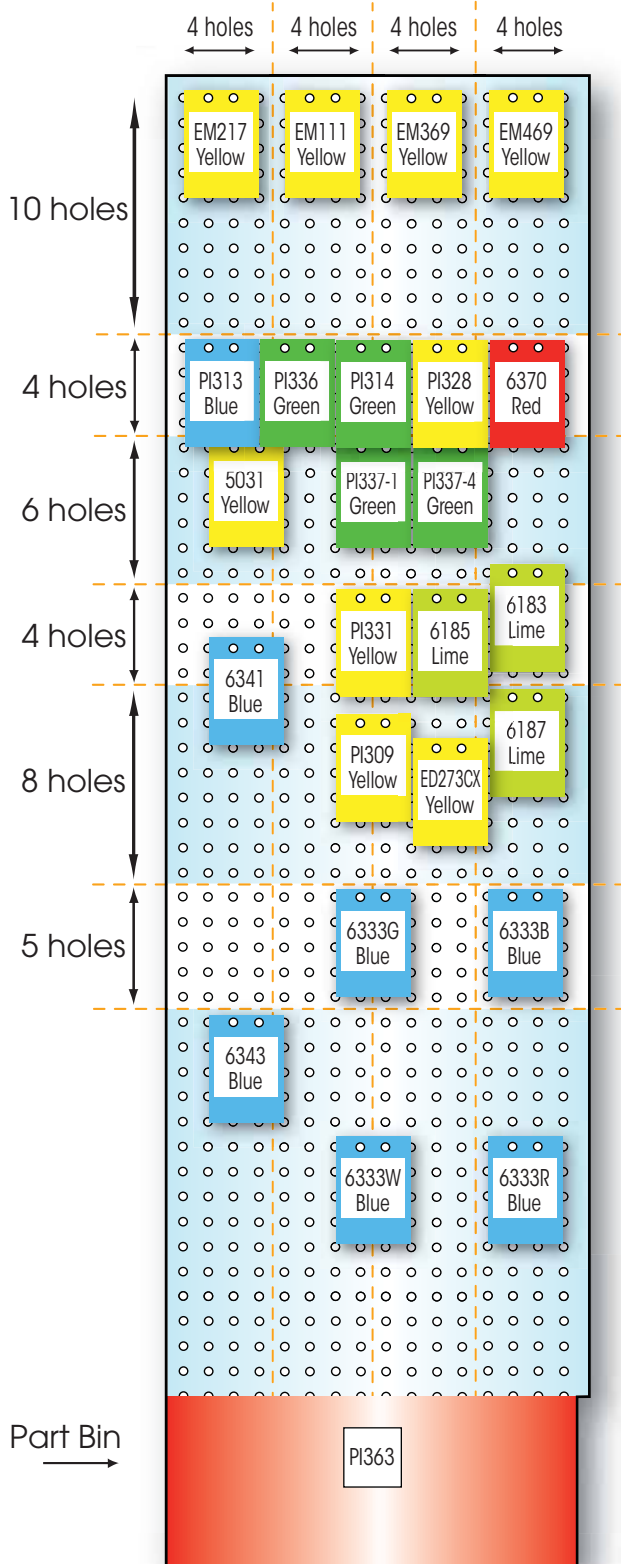

Panel D

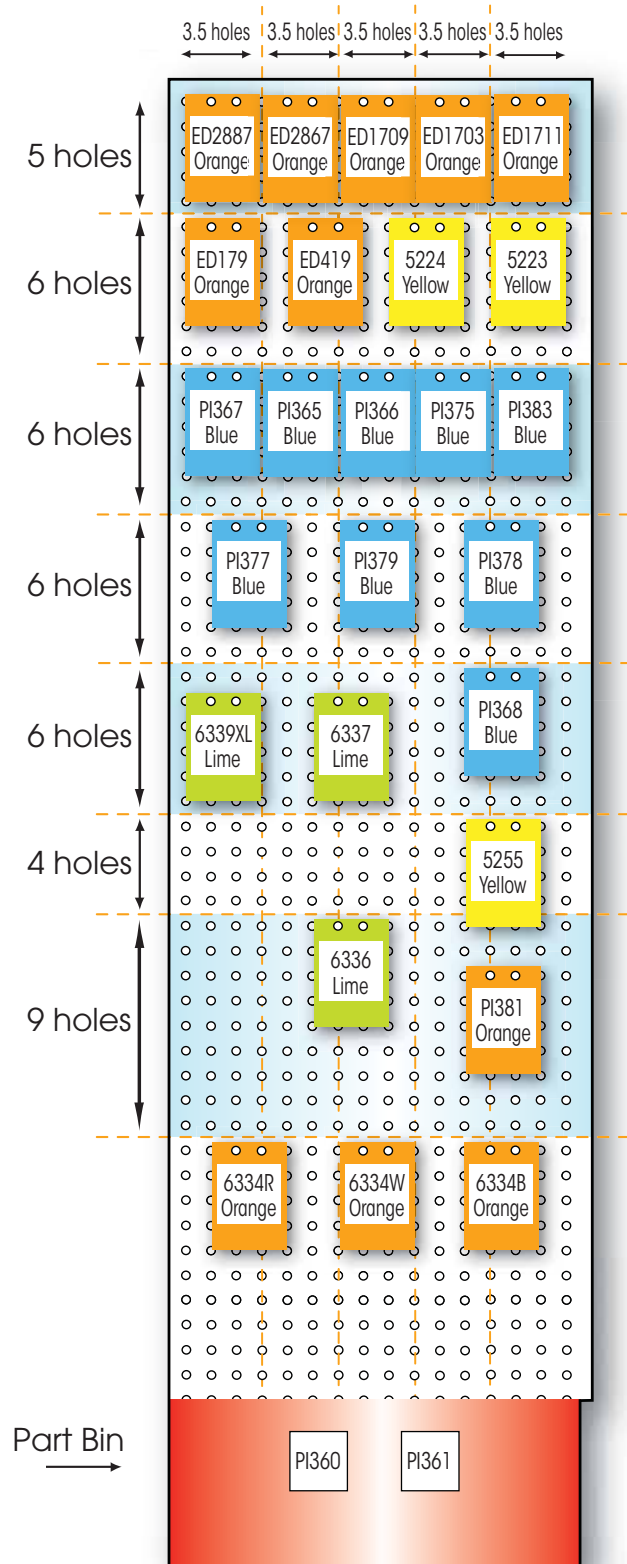



Indicator Lights

Terminals are tin plated brass. Wire leads are 22 AWG, 4.4-4.8" long, 1/2" stripped. Mounting will snap-fit into .500-.505 diameter hole in .020-.100" thick panels.



CATALOG NO.	LENS COLOR	LENS MATERIAL	VOLTAGE	BULB TYPE	STANDARD PACK
ED600	Red	Polycarbonate	28V	Incandescent	2
ED601	Green	Polycarbonate	28V	Incandescent	2
ED602	Amber	Polycarbonate	28V	Incandescent	2
ED610	Red	Nylon	105-125V AC	Neon	2
ED611	Green	Polycarbonate	105-125V AC	Neon**	2

Toggle Switches*

Silent switch; ground included.



CATALOG NO.	DESCRIPTION	RATING	COLOR	STANDARD PACK
ED1240-2	Single Pole	15A-120/277V AC	Brown	1
ED1238	Single Pole	20A-120/277V AC	Brown	1
ED1301**	Single Pole	15A-120V AC	Brown	1
ED1301-I**	Single Pole	15A-120V AC	Ivory	1
ED1262-2	Double Pole	15A-120/277V AC	Brown	1
ED1232	Double Pole	30A-120/277V AC	Brown	1

Conduit Nipples*

Zinc die cast steel. Includes plated steel locknuts and plastic insulating bushings.



CATALOG NO.	DESCRIPTION	SIZE	CONNECTION	STANDARD PACK
PI301	Conduit Nipple	1/2"	Offset	2
PI303	Conduit Nipple	1/2"	Straight	2

Receptacles*

2 pole, 3 wire (ground included).



CATALOG NO.	DESCRIPTION	RATING	COLOR	STANDARD PACK
ED1876	Single Receptacle	20A-250V	Brown	1
ED1876-I	Single Receptacle	20A-250V	Ivory	1
ED270**	Duplex Receptacle	15A-125V	Brown	1
ED270-I**	Duplex Receptacle	15A-125V	Ivory	1
ED877	Duplex Receptacle	20A-125V	Brown	1

Fuse Holders



CATALOG NO.	DESCRIPTION	STANDARD PACK
EM480	In-Line Fuse Holder for use with 1-1/4 x 1/4" fuses up to 20 amps, 32 volts, 15" lead; 14 gauge red vinyl insulated wire	1

Metal Bat Handle Toggle Switches*

Features black phenolic plastic case; brass terminals; steel and zinc chromate frame and support; all other external parts are brass/bright nickel. These heavy duty toggle switches have screw terminals. Part ED447 has an "ON-OFF" face plate.

Specifications: 10A/277V-20A/125V AC
Single Pole: 3/4HP 125-250V AC
Double Pole: 1-1/2HP 125-250V AC



CATALOG NO.	SEQUENCE	CIRCUIT	STANDARD PACK
ED447	ON-OFF	Single Pole, Single Throw	1
ED453	ON-ON	Double Pole, Double Throw	1
ED454	ON-ON	Single Pole, Double Throw	1
ED455	ON-OFF	Double Pole, Single Throw	1
ED468	ON-OFF-ON	Single Pole, Double Throw	1
ED494	ON-OFF-ON	Double Pole, Double Throw	1

Clips

All clips have vinyl red and black insulators.



CATALOG NO.	DESCRIPTION	STANDARD PACK
5033	Steel Alligator Clips for use with test probes (.075" - .080"); 1-31/32" long; jaws open 5/16" max.	2 red, 2 black, 4 clips
5034	Small Copper Alligator Clips for 20 gauge wire or smaller; 1-3/32" long; jaws open 3/16" min., solder or crimp connections	2 red, 2 black, 4 clips
5035	Copper Alligator Clips; 1-31/32" long; jaws open 5/16" max.; crimper slotted screw connection	2 red, 2 black, 4 clips
5036	Steel Test Clips; 20A, 2-7/16" long; jaws open 5/8" max.; crimper slotted screw connection	1 red, 1 black, 2 clips

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.
**Standard Grade

DEVCO

Test Leads



CATALOG NO.	DESCRIPTION	STANDARD PACK
5031	Low Voltage Test Leads; ten 22" long, color-coded leads with fully insulated alligator clips	8
5041	Small Hook Type Low Voltage Test Leads; retractable hooks, 36" thermoplastic 22 gauge wire, nylon body/plunger, red/black	2

Cable Markers


Cable markers come in books of 450 markers with matching terminal markers. Markers are mounted on dispenser cards in the book. Cable markers are suitable for above and below ground applications. Books are made of vinyl impregnated cloth that resists moderate amounts of dirt, oil and heat. The blank Write-On Markers (WM1014) are made of durable vinyl film that resists water, oils, and fungus. They can also withstand extremes in temperature.



CATALOG NO.	DESCRIPTION	STANDARD PACK
WM1002	Alpha-Numeric Cable Marker Book; contains 10 each: A-Z, 0-15, +, -, /	1
WM1003	Numeric Cable Marker Book; contains 10 each: 1-45	1
WM1009	Line and Terminal Cable Marker Book; contains 45 each: 1, 2, 3, A, B, C; contains 30 each: T1, T2, T3, L1, L2, L3	1
WM1014	180 Blank Write-On Markers, 1/2" x 1-1/2"	1

THHN Stranded Hook-Up Wire*


Packaged in handy dispenser bag. Polyvinyl chloride insulation. Wire rating: 600V, 90°C. Insulation: oil resistant nylon coating.



CATALOG NO.	COLOR	GAUGE	STRANDS	O.D.	LENGTH	STANDARD PACK
6333B	Black	14	19	.11"	48'	50
6333G	Green	14	19	.11"	48'	50
6333R	Red	14	19	.11"	48'	50
6333W	White	14	19	.11"	48'	50
6334B	Black	12	19	.13"	48'	50
6334R	Red	12	19	.13"	48'	50
6334W	White	12	19	.13"	48'	50
6335B	Black	10	19	.17"	48'	50
6335R	Red	10	19	.17"	48'	50
6335W	White	10	19	.17"	48'	50

TFFN Stranded Hook-Up Wire*

Packaged in handy dispenser bag. Polyvinyl chloride insulation. Wire rating: 600V, 90°C. Insulation: oil resistant nylon coating.



CATALOG NO.	COLOR	GAUGE	STRANDS	O.D.	LENGTH	STANDARD PACK
6332B	Black	16	26	.10"	48'	50
6332R	Red	16	26	.10"	48'	50
6332W	White	16	26	.10"	48'	50

Extension Rings*

Galvanized steel.



CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	KNOCKOUT (in.)	STANDARD PACK
PI390	4"	2-1/8"	1-7/8"	13.0	1/2	1
PI391	4"	4"	1-1/2"	21.0	3/4 & 1/2	1

Liquid-Tite Connectors*

Zinc die cast.



CATALOG NO.	DESCRIPTION	TRADE SIZE	KNOCKOUT	STANDARD PACK
PI350	Straight Liquid-Tite Connector	1/2"	1/2"	2
PI351	Straight Liquid-Tite Connector	3/4"	3/4"	2
PI352	90° Liquid-Tite Connector	1/2"	1/2"	1
PI353	90° Liquid-Tite Connector	3/4"	3/4"	1

Vinyl Grommet Assortment Packs



CATALOG NO.	DESCRIPTION	STANDARD PACK
ED320	General Assortment – contains all grommet sizes	35

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.



Zinc Plated Die Cast Steel Romex Connectors*

Zinc plated die cast connectors are for use with Romex, Service, and U.F. Cable.



CATALOG NO.	DESCRIPTION	TRADE SIZE	KNOCKOUT	STANDARD PACK
PI321	Zinc plated die cast Romex Connector	3/8"	1/2"	8
PI320	Zinc plated die cast Romex Connector	3/8"	1/2"	25
PI319	Zinc plated die cast Romex Connector	3/4"	3/4"	4

BX and Greenfield Connectors*

Zinc die cast.



CATALOG NO.	DESCRIPTION	TRADE SIZE	KNOCKOUT	STANDARD PACK
PI312	Set Screw Type Connector	3/8"	1/2"	8
PI315	90° Connector	3/8"	1/2"	3
PI322	Straight Connector, squeeze type, for armored cable and flexible conduit	3/8"	1/2"	8
PI340	Combination Cable Connector suitable for Romex or BX and Greenfield	3/8"	1/2"	8
PI318	Duplex Connector with single screw, clamp type	3/8"	1/2"	2

Bushings and Locknuts



CATALOG NO.	DESCRIPTION	STANDARD PACK
PI331	Plastic "Anti-Short" Bushings for 14/2, 14/3, 12/2 BX cable	35
ED28	Plastic Bushings with Locknut for 1/2" knockouts	5

Knockout Seals and Hole Plug



CATALOG NO.	DESCRIPTION	STANDARD PACK
PI316	For 1/2" knockouts, zinc plated steel	10
PI317	For 3/4" knockouts, zinc plated steel	10

Electrical Staples



CATALOG NO.	DESCRIPTION	SIZE	STANDARD PACK
PI330	Plastic; for 2 conductor Romex and other NM cable conductor; 12/2-14/2 range; UV protected	3/8" x 1/2"	50
PI332	Plastic; for 3 conductor Romex and other NM cable conductor; 12/3-14/3 range; UV protected	3/8" x 3/4"	50
PI309	Steel; non-insulated for Romex and NM cable; 14/2-10/3 range	1" x 1/2"	154
ED273CX	Insulated coppered finish; size #5	5/8" x 1/4"	100

Straps

One-hole straps. Zinc plated steel.



CATALOG NO.	DESCRIPTION	STANDARD PACK
PI306	Straps fit 1/2" E.M.T. Conduit	20
PI307	Straps fit 3/4" E.M.T. Conduit	12

Reducing Washers

Reducing washers are for reducing knockout holes. These washers have raised flanges for a tight fit and are made of galvanized steel.




CATALOG NO.	DESCRIPTION	STANDARD PACK
PI310	Reducing Washer - reduces hole from 3/4" to 1/2"	28
PI308**	Reducing Washer - reduces hole from 1/2" to 15/32"	10

**PI308 reduces hole to fit appliance switch.

Weatherproof Covers*

Covers fit part PI385. The covers come with gaskets.



CATALOG NO.	DESCRIPTION	STANDARD PACK
PI382	Blank Cover	1
PI386	Lever Switch Cover for standard toggle type switches	1
PI389	Duplex Receptacle Cover	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

DEVCO ELECTRICAL MERCHANDISING DISPLAY cont'd
Toggle Switch and Receptacle Combination Device*

Switch (single pole): 15A-120V AC
 Receptacle: 15A-125V AC; two pole three wire grounding



CATALOG NO.	DESCRIPTION	STANDARD PACK
ED5225	Toggle Switch and Receptacle – Brown Body	1

Weatherproof Boxes*

Heavy-duty die cast aluminum with baked aluminum finish. Boxes have two closure plugs and three holes.



CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	HOLE SIZE (in.)	STANDARD PACK
PI385	4-1/2"	2-3/4"	2"	19.0	1/2	1

Steel 1900 Boxes*

Galvanized steel.



CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	KNOCKOUT (in.)	STANDARD PACK
PI362	4"	4"	1-1/2"	21.0	3/4 & 1/2	1
PI363	4"	4"	2-1/8"	30.3	3/4 & 1/2	1

Steel 1900 Covers*

Baked Cadilite finish steel covers are raised 1/2" with fully depressed corners. Size: 4" x 4".



CATALOG NO.	DESCRIPTION	STANDARD PACK
PI377	Single Toggle	1
PI378	Single Duplex Receptacle	1
PI379	One Standard Single Receptacle	1
PI368	Toggle Switch and Duplex Receptacle	1
PI371	Flat, Blank, Galvanized steel	1

Testers


CATALOG NO.	DESCRIPTION	STANDARD PACK
EM111*	Neon Bulb Tester tests 90-500 volts AC or DC live circuits	1
EM217	Low Voltage Tester tests 5-50 volts AC or DC; attached alligator clips	1
EM369	Screwdriver Tester tests live circuit and polarity, doubles as screwdriver; 80-250 volts; neon indicator	1
EM469	Continuity Tester tests cold circuits without external power source; uses 2 AA batteries; 26" test lead with alligator probe	1

Accessory Oval Head Screws for Covers*

Size: 6-32 x 1/2"



CATALOG NO.	DESCRIPTION	STANDARD PACK
PI313	Chrome plated steel Oval Head Screws	20

Box Grounding Clip

Zinc plated.



CATALOG NO.	DESCRIPTION	STANDARD PACK
PI336	For #10, #12, and #14 copper grounding wire	11

Green Grounding Screw


CATALOG NO.	DESCRIPTION	STANDARD PACK
PI314	Size: 10-32 x 3/8"; combo head hex washer type	15

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.



Split Bolt Connectors*

Made of silicone bronze. For copper use only.



CATALOG NO.	DESCRIPTION	MAX. SOLID WIRE	MAX. STRANDED WIRE	STANDARD PACK
PI328	Split Bolt Connector	6	7	3

6180 Series Terminal Blocks*

Constructed of high barrier thermoplastic. Rated 20A-250V.



CATALOG NO.	NO. OF POSITIONS	LENGTH (in.)	WIDTH (in.)	SCREW SIZE	MAX. WIRE SIZE	STANDARD PACK
6183	6	2.91	.88	6-32	22-14	1
6185	10	4.41	.88	6-32	22-14	1
6187	14	5.91	.88	6-32	22-14	1

Heat Shrink Tubing Assortments*


Heat Shrink Tubing is made of flame-retardant polyolefin. Thin walled, all purpose tubing. Rated 600V, 125°C. 2500 volts/mil. dielectric strength. Inert to fungus. Virtually unaffected by corrosives, common fluids, and solvents. Pieces are 6" in length.



CATALOG NO.	COLOR	INNER DIAMETER		STANDARD PACK
		MAX. SUPPLIED	MIN. RECOVERED	
6370	Black & White	1/8", 1/4"	1/16", 1/8"	12

SJTO Service Cord*


Features stranded bare copper, PVC insulation; PVC jacket. Cord is oil resistant. Cords have 3 individually insulated conductors. Ratings: 300V; 60°C.



CATALOG NO.	DESCRIPTION	WIRE GAUGE	LENGTH	STANDARD PACK
6341	SJTO Service Cord	16	20'	20
6343	SJTO Service Cord	14	20'	20

Pigtails

Wire is stripped 1" on one end; 10-32 x 3/8" slotted hex head grounding screw on the other.



CATALOG NO.	WIRE LENGTH	WIRE GAUGE	WIRE TYPE	STANDARD PACK
PI337-1	6-1/2"	12	Solid	5

Armored Connector*


Vinyl enclosed.



CATALOG NO.	FITS CORD DIAMETER	POLES	WIRES	RATING	STANDARD PACK
ED2887	.225" - .60"	2	3	15A-125V	1

Pigtails

Wire has #10 spade on one end; 10-32 x 3/8" slotted round head screw on the other.



CATALOG NO.	WIRE LENGTH	WIRE GAUGE	WIRE TYPE	STANDARD PACK
PI337-4	8"	12	Stranded	5

Armored Plug*

Vinyl enclosed.



CATALOG NO.	FITS CORD DIAMETER	POLES	WIRES	RATING	STANDARD PACK
ED2867	.25" - .625"	2	3	15A-125V	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

DEVCO ELECTRICAL MERCHANDISING DISPLAY cont'd
Grounding Rubber Handle Plug*


CATALOG NO.	FITS CORD DIAMETER	POLES	WIRES	RATING	STANDARD PACK
ED1703	.25" - .60"	2	3	20A-250V	1
ED1709	.25" - .60"	2	3	15A-125V	1

Tandem Grounding Rubber Handle Plug*


CATALOG NO.	FITS CORD DIAMETER	POLES	WIRES	RATING	STANDARD PACK
ED1711	.25" - .60"	2	3	15A-250V	1

Thermoplastic Handle Plug*

Standard grade; flexible spring prongs; furnished with face washer. Rating: 15A-125V.



CATALOG NO.	MAX. CORD DIAMETER	POLES	WIRES	MATERIAL	STANDARD PACK
ED179	.406"	2	2	Thermoplastic	2

Right Angle Plug*


CATALOG NO.	FITS CORD DIAMETER	POLES	WIRES	RATING	STANDARD PACK
ED4867	.25" - .655"	2	3	15A-125V	1

Triple Outlets*

Polarized, high impact resistant plastic.



CATALOG NO.	DESCRIPTION	RATING	STANDARD PACK
5223	Heavy duty, 2 pole, 3 wire	15A-125V	1
5224	2 pole, 2 wire	15A-125V	1

Plated Steel Utility Covers*


CATALOG NO.	DESCRIPTION	WIDTH	LENGTH	STANDARD PACK
PI365	Toggle Switch	2-11/32"	4-1/4"	1
PI366	Duplex Receptacle	2-11/32"	4-1/4"	1
PI367	Blank Cover	2-11/32"	4-1/4"	1
PI375	Standard Single Receptacle	2-11/32"	4-1/4"	1

Utility Covers*

Utility covers are 4 1/4" x 2-11/32".



CATALOG NO.	DESCRIPTION	STANDARD PACK
PI383	Appliance Switch, .4687" dia. hole, baked cadlilite finish	1

Ground Adapter*

Polarized, 2 pole to 3 wire grounding, polypropylene body.



CATALOG NO.	DESCRIPTION	RATING	STANDARD PACK
ED419	Ground Adapter	15A-125V	2

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.



DEVCO ELECTRICAL MERCHANDISING DISPLAY cont'd

Tape*



5255

CATALOG NO.	DESCRIPTION	LENGTH	STANDARD PACK
5255	Vinyl Electrical Tape	3/4" x 60'	1

Utility Fuse Outlets*



PI381

CATALOG NO.	DESCRIPTION	STANDARD PACK
PI381	Utility Fuse Outlet and Switch with Cover; 1/2HP-125V AC only; galvanized steel construction	1

Steel Utility Boxes*

Galvanized steel.




PI360

CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	KNOCKOUT (in.)	STANDARD PACK
PI360	4"	2-1/8"	1-7/8"	13.0	1/2	1
PI361	4"	2-1/8"	2-1/8"	14.5	1/2	1

Thermostat Wire*

Thermoplastic insulated, jacketed wire for low voltage applications. Conductors are solid copper, individually insulated and color coded.



6336

6339XL

CATALOG NO.	CONDUCTORS	WIRE GAUGE	LENGTH	STANDARD PACK
6336	3	20	40'	40
6337	5	20	40'	40
6339XL	10	20	40'	40

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.



DEVCO ELECTRICAL MERCHANDISING DISPLAY RE-ORDER FORM

BILL TO: _____

SHIP TO: _____

DATE	P.O. NO.	SHIP VIA	SHIPPING DATE	SALES REP.
/ /			/ /	

PANEL A

- _____ ↑ ED600
- _____ ↑ ED601
- _____ ↑ ED602
- _____ ↑ ED610
- _____ ↑ ED611
- _____ ↑ ED4867
- _____ ↑ ED1240-2
- _____ ↑ ED1232
- _____ ↑ ED1238
- _____ ↑ PI262-2
- _____ ↑ ED1301
- _____ ↑ ED1301-1
- _____ ↑ ED270
- _____ ↑ ED270-1
- _____ ↑ ED877
- _____ ↑ ED5225
- _____ ↑ ED1876
- _____ ↑ ED1876-1
- _____ ↑ EM480
- _____ ↑ ED447
- _____ • ED453
- _____ • ED454
- _____ • ED455
- _____ • ED468
- _____ • ED494
- _____ • 5035
- _____ • 5033
- _____ • 5034
- _____ • 5041
- _____ • 5036
- _____ • WM1014
- _____ • WM1009
- _____ • WM1003
- _____ • WM1002
- _____ ↓ 6335R
- _____ ↓ 6335B
- _____ ↓ 6335W
- _____ ↓ PI390
- _____ ↓ PI391

PANEL B

- _____ ↑ PI350
- _____ ↑ PI351
- _____ ↑ PI352
- _____ ↑ PI353
- _____ ↑ ED320
- _____ ↑ PI321
- _____ ↑ PI312
- _____ ↑ PI340
- _____ ↑ ED28
- _____ ↑ PI316
- _____ ↑ PI317
- _____ ↑ PI322
- _____ ↑ PI315
- _____ ↑ PI318
- _____ ↑ PI319
- _____ ↑ PI301
- _____ ↑ PI303
- _____ ↑ PI330
- _____ ↑ PI306
- _____ • PI320
- _____ • PI308
- _____ • PI332
- _____ • PI307
- _____ • PI310
- _____ • PI389
- _____ • PI386
- _____ • PI382
- _____ • PI385
- _____ ↓ 6332W
- _____ ↓ 6332R
- _____ ↓ 6332B
- _____ ↓ PI362
- _____ ↓ PI371

PANEL C

- _____ ↑ EM217
- _____ ↑ EM111
- _____ ↑ EM369
- _____ ↑ EM469
- _____ ↑ PI313
- _____ ↑ PI336
- _____ ↑ PI314
- _____ ↑ PI328
- _____ ↑ 6370
- _____ ↑ 5031
- _____ ↑ PI337-1
- _____ ↑ PI337-4
- _____ • 6183
- _____ • PI331
- _____ • 6185
- _____ • 6341
- _____ • 6187
- _____ • PI309
- _____ • ED273CX
- _____ • 6333G
- _____ • 6333B
- _____ ↓ 6343
- _____ ↓ 6333W
- _____ ↓ 6333R
- _____ ↓ PI363

PANEL D

- _____ ↑ ED2887
- _____ ↑ ED2867
- _____ ↑ ED1709
- _____ ↑ ED1703
- _____ ↑ ED1711
- _____ ↑ ED179
- _____ ↑ ED419
- _____ ↑ 5224
- _____ ↑ 5223
- _____ ↑ PI367
- _____ ↑ PI365
- _____ ↑ PI366
- _____ ↑ PI375
- _____ ↑ PI383
- _____ ↑ PI377
- _____ ↑ PI379
- _____ ↑ PI378
- _____ • PI368
- _____ • 6339XL
- _____ • 6337
- _____ • 5255
- _____ • 6336
- _____ • PI381
- _____ ↓ 6334R
- _____ ↓ 6334W
- _____ ↓ 6334B
- _____ ↓ PI360
- _____ ↓ PI361

↑	Upper 1/3 of Panel
•	Middle 1/3 of Panel
↓	Lower 1/3 of Panel

SIGNATURE: _____

ABOUT DIVERSITECH

DiversiTech Corporation is North America's largest manufacturer of equipment pads and a leading manufacturer and supplier of components and related products for the heating, ventilating, air conditioning, and refrigeration (HVACR) industry.

Headquartered in the Atlanta, GA metropolitan area, DiversiTech manufactures a suite of products which includes a wide range of mechanical, electrical, chemical, and structural parts for HVACR and electrical systems, and swimming pool installations. The company maintains manufacturing and distribution facilities in key U.S. locations, Europe, and in the Far East. DiversiTech has enjoyed a continued history of successful growth and has acquired industry-recognized names including Devco® Enterprises, Wagner® Manufacturing, The Black Pad®, and Specialty Chemical.



6650 Sugarloaf Parkway
Duluth, GA 30097

678.542.3600
800.995.2222
678.542.3700 Fax
www.devco1.com

Download an electronic copy of this catalog at
www.diversitech.com/literature/lit-cat-develec.pdf

Send edits / corrections / comments on this
catalog to feedback@diversitech.com