

**2012-2013  
DIVERSITECH  
PRESEASON  
PROGRAM**

DECEMBER 1, 2012 – MARCH 31, 2013

*Great Pricing!  
Pad Discounts!  
Extended Terms!*

**E LITE**  
DiversiTech

**HEF-T-PAD**  
DiversiTech

**THE BLACK PAD**  
DiversiTech

**ULTRALITE**  
DiversiTech

**GLADLITE**  
DiversiTech

**All  
\$3,000  
Orders  
Qualify!**

Come see us at  
Booth #1845



**AHR  
EXPO**

Jan. 28-30, 2013  
Dallas, TX

**DIVERSITECH** 

# Get it while it's Cold!

*Take advantage of great savings and generous terms when you order during the 2012-2013 Preseason Program.*

Program Period: 12/1/2012 - 3/31/2013

## **PAD DISCOUNTS**

**Purchase 200 Pads: 3% OFF Pad Pricing**

**Purchase 500+ pads: 6% OFF Pad Pricing**

## **PAYMENT TERMS**

**Ship by 12/31/2012: 3% 10, Net 120 Days**

**Ship by 1/31/2013: 3% 10, Net 90 Days**

**Ship by 3/31/2013: 2% 10, Net 90 Days**

In order to qualify for DiversiTech's 2012-2013 Preseason Program and receive special pricing and discounts, you must:

- Purchase a minimum of \$3,000 from our HVAC parts catalog
- Reference promo code **PRESEASON13** on every order
- Ship each order to a single location
- Place all orders between 12/1/2012 and 3/31/2013.

## ULTRALITE® LIGHTWEIGHT EQUIPMENT PADS

A true concrete equipment pad at the weight of plastic (about 2.5 lbs. per square foot). UltraLite® is strengthened by miles of fiber in each square foot of fiber-cement coating. This fiber allows the pad to flex instead of cracking or breaking. The textured surface prevents the condensing unit or portable generator from sliding, and allows water drainage, while the engineered encapsulated polystyrene (EPS) core prevents warping and provides a solid bottom to resist settling. Unaffected by soil conditions, ultraviolet (UV) light, temperature extremes, and other weather conditions.



UC2424-2

### 2" UltraLite® Pads


The 2" thick UltraLite® pad is the industry standard. Used across a wide variety of applications, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC1636-2	16 X 36	11	20	250	EA	20
UC2424-2	24 X 24	15	20	323	EA	20
UC2430-2	24 X 30	17	20	361	EA	20
UC2436-2	24 X 36	22	20	455	EA	20
UC2448-2	24 X 48	18	20	385	EA	20
UC2626-2	26 X 26	17	20	365	EA	20
UC2628-2	26 X 28	19	20	397	EA	20
UC3030-2	30 X 30	21	20	441	EA	20
UC3036-2	30 X 36	27	20	571	EA	20
UC3040-2	30 X 40	30	20	617	EA	20
UC3143-2	31 X 43	26	20	551	EA	20
UC3232-2	32 X 32	24	20	501	EA	20
UC3234-2	32 X 34	23	20	485	EA	20
UC3237-2	32 X 37	28	20	579	EA	20
UC3434-2	34 X 34	23	20	493	EA	20
UC3445-2	34 X 45	45	20	915	EA	20
UC3636-2	36 X 36	27	20	555	EA	20
UC3640-2	36 X 40	29	20	608	EA	20
UC3648-2	36 X 48	35	20	725	EA	20
UC3842-2	38 X 42	30	20	625	EA	20
UC4040-2	40 X 40	32	20	644	EA	20
UC4147-2	41 X 47	39	20	805	EA	20

U.S. Patents 7,334,385; 7,232,589; 6,931,822; 6,927,183; 5,728,458; 5,664,394; 5,268,226; 5,209,968, and patents pending. ICBO PFC-5112.

### 3" UltraLite® Pads

Where local codes supersede the International code and require a pad thicker than 2" – 3" UltraLite® is the solution.



UC2424-3

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC1636-3	16 X 36	18	15	297	EA	15
UC2424-3	24 X 24	18	15	294	EA	15
UC2430-3	24 X 30	21	15	339	EA	15
UC2436-3	24 X 36	26	15	412	EA	15
UC2442-3	24 X 42	28	15	441	EA	15
UC2448-3	24 X 48	28	15	443	EA	15
UC2626-3	26 X 26	17	15	279	EA	15
U2660-3	26 X 60	55	15	850	EA	15
UC2838-3	28 X 38	30	15	471	EA	15
UC3030-3	30 X 30	23	15	370	EA	15
UC3036-3	30 X 36	30	15	471	EA	15
UC3040-3	30 X 40	33	15	517	EA	15
UC3048-3	30 X 48	40	15	625	EA	15
U3060-3	30 X 60	63	15	970	EA	15
UC3232-3	32 X 32	26	15	411	EA	15
UC3237-3	32 X 37	27	15	436	EA	15
U3353-3	33 X 53	68	15	1,045	EA	15
UC3434-3	34 X 34	27	15	427	EA	15
UC3445-3	34 X 45	39	15	612	EA	15
U3465-3	34 X 65	71	15	1,090	EA	15
UC3636-3	36 X 36	34	15	528	EA	15
UC3642-3	36 X 42	32	15	510	EA	15
UC3648-3	36 X 48	37	15	579	EA	15
U3650-3	36 X 50	38	15	595	EA	15
U3654-3	36 X 54	71	15	1,096	EA	15
U3660-3	36 X 60	49	15	767	EA	15
U3678-3	36 X 78	99	15	1,510	EA	15
UC3842-3	38 X 42	35	15	550	EA	15
U3865-3	38 X 65	85	15	1,300	EA	15
U3870-3	38 X 70	113	15	1,720	EA	15
UC4040-3	40 X 40	34	15	510	EA	15
UC4042-3	40 X 42	36	15	565	EA	15
U4054-3	40 X 54	81	15	1,240	EA	15
UC4347-3	43 X 47	60	15	925	EA	15
U4550-3	45 X 50	81	15	1,240	EA	15
U4558-3	45 X 58	93	15	1,420	EA	15
U4848-3	48 X 48	85	15	1,300	EA	15
U4854-3	48 X 54	91	15	1,390	EA	15
U4866-3	48 X 66	108	15	1,645	EA	15
U5053-3	50 X 53	92	15	1,405	EA	15
U5056-3	50 X 56	97	15	1,480	EA	15
U5075-3	50 X 75	130	15	1,975	EA	15
U5079-3	50 X 79	145	15	2,200	EA	15
U5252-3	52 X 52	94	15	1,435	EA	15
U5260-3	52 X 60	109	15	1,660	EA	15
U5557-3	55 X 57	109	15	1,660	EA	15
U6067-3	60 X 67	134	15	2,035	EA	15

### 3" UltraLite® Wedge Pads

The new UltraLite® Wedge Pad is designed for Lennox condensing units.



UC3132-3L

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC3132-3L	31 X 32	23.33	15	350	EA	15
UC3539-3L	35 X 39	33.46	15	502	EA	15
UC4044-3L	40 X 44	37.53	15	563	EA	15

### UltraLite® Earthquake Code Compliant Pads

Required nearly exclusively in Southern California, the UltraLite® pad is available for compliance with strict attachment provisions detailed in earthquake prone local building codes.

UltraLite® earthquake code compliant pads are only available for sale in regions where local codes mandate installation of pads with these particular characteristics. Currently these locales include most of Southern California, portions of Washington, and portions of Oregon.



UC2424-3CA

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC2424-3CA	24 X 24	14	15	241	EA	15
UC2436-3CA	24 X 36	22	15	349	EA	15
UC2448-3CA	24 X 48	28	15	443	EA	15
UC2636-3CA	26 X 36	29	15	428	EA	15
UC3030-3CA	30 X 30	22	15	351	EA	15
UC3036-3CA	30 X 36	25	15	400	EA	15
UC3040-3CA	30 X 40	34	15	510	EA	15
UC3232-3CA	32 X 32	24	15	381	EA	15
UC3445-3CA	34 X 45	33	15	516	EA	15
UC3636-3CA	36 X 36	28	15	441	EA	15
UC3642-3CA	36 X 42	32	15	510	EA	15
UC3648-3CA	36 X 48	37	15	579	EA	15
UC4040-3CA	40 X 40	34	15	510	EA	15

### E LITE® PLASTIC EQUIPMENT PADS

E Lite's rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. The result is a pad that is lightweight, but not too light. A subtle texture prevents unit slide and presents a classic appearance, which is enhanced by rounded edges and a concrete gray color. Each pad is molded with a size label and a symbol representing content of recycled material.



EL2424-2

### 3" E Lite® Pads

Used where local codes supersede the International code and require a pad thicker than 2".



EL5658-3

### 2" E Lite® Pads

The 2" thick E Lite® pad is the choice for plastic pads, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EL2424-2	24 X 24	7	44	333	EA	44
EL2430-2	24 X 30	9	22	219	EA	22
EL2436-2	24 X 36	11	22	256	EA	22
EL2626-2	26 X 26	8	22	205	EA	22
EL3030-2	30 X 30	11	22	265	EA	22
EL3036-2	30 X 36	13	22	313	EA	22
EL3040-2	30 X 40	15	22	346	EA	22
EL3232-2	32 X 32	13	22	300	EA	22
EL3238-2	32 X 38	15	22	351	EA	22
EL3244-2	32 X 44	17	22	401	EA	22
EL3434-2	34 X 34	14	22	350	EA	22
EL3636-2	36 X 36	16	22	373	EA	22
EL3640-2	36 X 40	18	22	410	EA	22
EL3648-2	36 X 48	29	22	663	EA	22
EL3842-2	38 X 42	19	22	470	EA	22

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EL1838-3	18 X 38	16	16	300	EA	16
EL2424-3	24 X 24	13	16	225	EA	16
EL2430-3	24 X 30	16	16	277	EA	16
EL2436-3	24 X 36	19	16	321	EA	16
EL3030-3	30 X 30	20	16	345	EA	16
EL3040-3	30 X 40	26	16	448	EA	16
EL3232-3	32 X 32	21	16	353	EA	16
EL3238-3	32 X 38	26	16	448	EA	16
EL3244-3	32 X 44	30	16	499	EA	16
EL3636-3	36 X 36	28	16	471	EA	16
EL3640-3	36 X 40	31	16	521	EA	16
EL3648-3	36 X 48	36	16	601	EA	16
EL3842-3	38 X 42	33	16	575	EA	16
EL3870-3	38 X 70	36	16	604	EA	16
EL4040-3	40 X 40	31	16	546	EA	16
EL4558-3	45 X 58	33	16	545	EA	16
EL4848-3	48 X 48	29	16	481	EA	16
EL4872-3	48 X 72	72	16	1,177	EA	16
EL5252-3	52 X 52	48	16	793	EA	16
EL5658-3	56 X 58	43	16	715	EA	16

## THE HURRICANE PAD™

### The Hurricane Pad™

Designed specifically for the hurricane prone regions of Florida and the Gulf Coast, The Hurricane Pad™ meets stringent local code requirements for wind resistance. Heavier than a normal concrete pad, this 4" pad provides sufficient weight to meet code. For certain taller equipment, The Hurricane T-Class Pad™ is needed. Due to their extra weight, standard freight terms only apply for shipments to Florida. All other shipments are shipped FOB Conyers, GA.




### The Hurricane T-Class Pad™

The Hurricane T-Class Pad™ is even heavier than The Hurricane Pad™ and is designed to meet the higher wind loads of taller equipment. The taller the piece of equipment mounted to the pad, the greater the wind load on the pad. These heavier 4" pads provide sufficient weight to meet code for these taller condensing units. Due to their extra weight, standard freight terms for The Hurricane T-Class Pad™ only apply for shipments to Florida. All other shipments are shipped FOB Conyers, GA.



CATALOG NO.	SIZE	PALLET QTY.	UOM	ORDER MULTIPLE
H1840-4	18 X 40	16	EA	16
H2424-4	24 X 24	16	EA	16
H2436-4	24 X 36	16	EA	16
H3030-4	30 X 30	16	EA	16
H3060-4	30 X 60	16	EA	16
H3232-4	32 X 32	16	EA	16
H3345-4	33 X 45	16	EA	16
H3636-4	36 X 36	16	EA	16
H3642-4	36 X 42	16	EA	16
H3648-4	36 X 48	16	EA	16
H3652-4	36 X 52	8	EA	8
H3672-4	36 X 72	8	EA	8
H3842-4	38 X 42	16	EA	16
H3852-4	38 X 52	8	EA	8
H3865-4	38 X 65	8	EA	8
H4040-4	40 X 40	8	EA	8
H4242-4	42 X 42	8	EA	8
H4545-4	45 X 45	8	EA	8
H4558-4	45 X 58	8	EA	8
H5151-4	51 X 51	8	EA	8
H5557-4	55 X 57	8	EA	8

CATALOG NO.	SIZE	PALLET QTY.	UOM	ORDER MULTIPLE
HT2424-4	24 X 24	10	EA	10
HT2436-4	24 X 36	10	EA	10
HT3030-4	30 X 30	10	EA	10
HT3060-4	30 X 60	10	EA	10
HT3232-4	32 X 32	10	EA	10
HT3345-4	33 X 45	10	EA	10
HT3434-4	34 X 34	10	EA	10
HT3636-4	36 X 36	10	EA	10
HT3642-4	36 X 42	10	EA	10
HT3648-4	36 X 48	10	EA	10
HT3652-4	36 X 52	10	EA	10
HT3672-4	36 X 72	10	EA	10
HT3842-4	38 X 42	10	EA	10
HT3852-4	38 X 52	10	EA	10
HT3865-4	38 X 65	10	EA	10
HT4040-4	40 X 40	10	EA	10
HT4242-4	42 X 42	10	EA	10
HT4545-4	45 X 45	10	EA	10
HT4558-4	45 X 58	10	EA	10
HT5151-4	51 X 51	10	EA	10
HT5557-7	55 X 57	10	EA	10

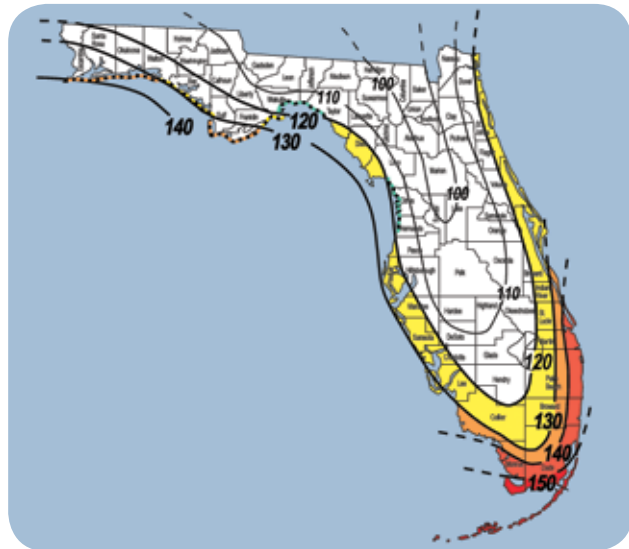

### The Hurricane Pad Attachment Bracket

Bracket secures condenser to The Hurricane Pad. Use #8 self-drilling or self-tapping screws to secure condenser to brackets. Be sure to place brackets according to local building code requirements.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HC-1	The Hurricane Pad Attachment Bracket, pack of 4	PK	1
HC-1-100	The Hurricane Pad Attachment Bracket, pack of 100	PK	1

**HEAT PUMP PADS**

**Heat Pump Pad™**

An effective base for heat pump equipment installed in snowy climates. Rather than a combination of a typical 2" (or 3") equipment pad and 6" heat pump risers, the Heat Pump Pad™ provides a full 8" of elevation in a simple 36" x 36" footprint. The star pattern of the integral risers allows for installation of equipment with different size footprints up to 36" x 36". Included with the Heat Pump Pad™ are eight anti-vibration pads uniquely designed to fit into the guide slots on the top of the integral risers. The base of the Heat Pump Pad™ is sloped outward to allow for easy drainage of condensate or defrost cycle condensate when the outdoor coil is operating in heat pump mode. The Heat Pump Pad™ easily nests allowing for efficient shipping, transportation, and warehousing. Injection molded from concrete gray, recycled polypropylene material, the Heat Pump Pad™ is environmentally friendly and designed to last longer than the equipment it supports. Patent(s) pending.



HP3636-8



**Stackable!**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HP3636-8	36" x 36" x 8"	EA	16


**Heat Pump Pad™**

This information is available as a contractor handout.  
Order item number LIT-FLY-HEAT.



*Ideal for snowy climates, the new DiversiTech Heat Pump Pad™ is the perfect solution for protecting equipment and ensuring proper operation year round. The Heat Pump Pad™ provides*

Each Heat Pump Pad™ includes eight Anti-Vibration pads fitted into special slots in the risers to reduce equipment vibration and noise.

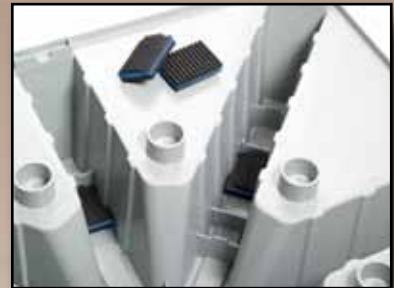

*a full 8" clearance from ground level in a compact 36" square footprint. Included with every Heat Pump Pad™ are 8 anti-vibration pads, specifically molded into slots in the pad to reduce vibration and provide quiet operation of your equipment. The base of the pad is also angled to direct melting snow or condensate away from the unit and pad. Heat Pump Pads are made from recycled polypropylene so they are eco-friendly and are built tough to provide many years of service. These pads also nest together for easier transportation and warehousing.*


**Stackable!**



## ANTI-VIBRATION PADS

### E.V.A. Anti-Vibration Pad


The latest generation in vibration dampening technology. The most effective vibration dampening pad available on the market. The EVA Pad was tested against other pads at four different vibration settings. In the most severe vibration extremes, the EVA Pad outperforms cork and rubber by a margin of greater than 3:1! This is due to the special composite foam center which is much more structurally sound than cork. It is not affected by oils or chemicals that can break down cork and is much more effective at vibration dampening than solid rubber. All this at a very competitive price. Designed to withstand 50 psi.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
MP-2E	2" x 2" x 7/8" E.V.A. Pad	EA	48	\$ 0.26
MP-3E	3" x 3" x 7/8" E.V.A. Pad	EA	36	0.60
MP-4E	4" x 4" x 7/8" E.V.A. Pad	EA	24	0.85
MP-6E	6" x 6" x 7/8" E.V.A. Pad	EA	24	1.95
MP-18E	18" x 18" x 7/8" E.V.A. Pad	EA	6	16.50

### Rubber/Cork Anti-Vibration Pad


Highest quality elastomeric oil resistant padding. Designed to withstand 50 psi. The rubber pads are corrugated on both sides. The cork is laminated between two corrugated pads. Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
MP-2C	2" x 2" x 7/8" Rubber/Cork	EA	48	\$ 0.16
MP-3C	3" x 3" x 7/8" Rubber/Cork	EA	36	0.32
MP-4C	4" x 4" x 7/8" Rubber/Cork	EA	24	0.65
MP-6C	6" x 6" x 7/8" Rubber/Cork	EA	24	1.35
MP-18C	18" x 18" x 7/8" Rubber/Cork	EA	6	12.00

### Rubber Anti-Vibration Pad

Highest quality elastomeric oil resistant padding. Designed to withstand 50 lbs. psi. The rubber pads are corrugated on both sides. Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
MP-2	2" x 2" x 3/8" Rubber	EA	48	\$ 0.12
MP-3	3" x 3" x 3/8" Rubber	EA	36	0.25
MP-4	4" x 4" x 3/8" Rubber	EA	24	0.36
MP-6	6" x 6" x 3/8" Rubber	EA	24	0.80
MP-18	18" x 18" x 3/8" Rubber	EA	6	7.85

### Iso-Cube Economy Anti-Vibration Pad

Natural rubber pads, designed to reduce vibration and noise emanating from refrigeration and air conditioning equipment. The circular design in each pad offers a suction cup effect, which eliminates the need to bolt the pads down. A standard 18" (46cm) pad is divided into eighty-one 2" (5cm) segments, each of which may be cut or torn to provide smaller pads. These 50 durometer pads will withstand a load of 180 psi with greater resiliency.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
ISO-18W	18" x 18" x 3/4" Iso-Cube	EA	6	10.95

# Get everything you want in a Wagner Motor.



**COLOR PACKAGING**  
Find the right motor fast!



**INTEGRATED CARTON HANDLE**  
Innovative handle makes the motors easy to carry.



**EXTENDED BOLTS**  
Extended mounting bolts make installation easier in cramped spaces.

CROSS REFERENCE GUIDE	
WGS40728	
Manufacturer	1/8 hp
MARS	CG728
PACKARD	63128
GEMLINE	EM3728
MARATHON	K213
AD SMITH	PSE1028S
FASCO	CG38

**CROSS REFERENCE**  
Complete manufacturer cross-reference on every carton.



**CAPACITOR SIZE**  
370 VAC run capacitor size is clearly marked on every carton.



**LARGER DIAGRAM**  
Extra large wiring diagram for easy reference.






**MOTORS, MOTOR MOUNTS**

**Direct Drive Furnace Blower Motors**

- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diameter, and Flats
- Uses 370V Capacitors
- Standard 48 Frame Motor Casing Size
- 2.5" Diameter Hub Rings included
- Low Power Consumption
- Automatic Thermal Overload Protector
- Continuous Duty, Air Over
- Electrically Reversible
- Class B Insulation
- Speed: 1075/3
- Quiet Operation
- 60 HZ

CATALOG NO.	HP	VOLTAGE	SPEED	FLA	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
WG840583	1/4	115	1075/3	4.6	EA	1	\$ 37.85
WG840584	1/4	208-230	1075/3	2.2	EA	1	38.00
WG840585	1/3	115	1075/3	6.7	EA	1	41.45
WG840586	1/3	208-230	1075/3	2.9	EA	1	43.45
WG840587	1/2	115	1075/3	10.2	EA	1	50.05
WG840588	1/2	208-230	1075/3	5.0	EA	1	50.80
WG840589	3/4	115	1075/3	11.3	EA	1	54.55
WG840590	3/4	208-230	1075/3	5.4	EA	1	56.80



**Condenser Fan Motors**

- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diameter, and Flats
- Drain Holes with Plugs in both end plates
- Automatic Thermal Overload Protector
- Standard 48 Frame Motor Casing Size
- Low Power Consumption
- 60 C Ambient Design
- Electrically Reversible
- Continuous Air Over
- Class B Insulation
- Quiet Operation
- Extended Studs
- 30" Leads
- 60 HZ


CATALOG NO.	HP	VOLTAGE	SPEED	FLA	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
WG840727	1/6	208-230	1075/1	1.3	EA	1	\$ 36.25
WG840728	1/4	208-230	1075/1	2.2	EA	1	38.25
WG840729	1/3	208-230	1075/1	2.8	EA	1	40.55
WG840730	1/2	208-230	1075/1	4.2	EA	1	47.25
WG840731	3/4	208-230	1075/1	4.5	EA	1	56.60
WG840204	1/4	208-230	825/1	1.5	EA	1	54.25
WG840205	1/3	208-230	825/1	2.2	EA	1	56.60



**Multiple Horsepower Motors**

The Multi-Horsepower motors are specially designed to cover a range of applications. The direct drive furnace blower motors range from 1/2 to 1/6 in both 115 and 230 volts and 3/4 to 1/5 in both 115 and 230 volts all at 1075rpm. These motors feature reversing plugs, extended thru bolts 36 inch leads and are designed for 370 volt capacitors. Installs with all 48 frame mounting brackets.

CATALOG NO.	APPLICATION	VOLTAGE	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
WG840463	DDFB	115	1075/4	1/2-7.0	1/3-6.7	1/4-4.4	1/5-3.2	1/6-2.4	EA	1	\$ 48.05
WG840464	DDFB	208-230	1075/4	1/2-3.9	1/3-3.6	1/4-2.5	1/5-1.8	1/6-1.3	EA	1	48.85
WG840464	CF	208-230	1075/2	1/3-2.8	1/4-2.0	1/5-1.7	1/6-1.5		EA	1	48.85
WG840465	CF	208-230	1075/2	1/3-2.8	1/4-2.0	1/5-1.7	1/6-1.5		EA	1	48.00
WG840466	DDFB	115	1075/4	3/4-8.1	1/2-6.6	1/3-4.6	1/4-3.8	1/5-3.1	EA	1	57.20
WG840467	DDFB	208-230	1075/4	3/4-3.8	1/2-3.7	1/3-2.5	1/4-1.8	1/5-1.7	EA	1	57.20
WG840468	CF	208-230	1075/2	1/2-3.0	1/3-2.5	1/4-2.0	1/5-1.3		EA	1	55.25
WG840469	CF	208-230	825/2	1/3-2.1	1/4-1.7	1/5-1.5	1/6-1.2		EA	1	50.25



**DiversiTech Motor Brackets**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
DMB-1	Fixed Lug Assembly for 5-1/2" diameter motors	EA	1	\$ 6.95
DMB-2	Adjustable Lug Assembly for 5-1/2" diameter motors	EA	1	4.85



**Motor Mount – Flex Bracket**

Torsion Flex Bracket holds motor securely. Fits 5- 1/2" motors. Typically used for Goodman equipment.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
DMB-3	5-1/2" Motor Mount Torsion Flex Bracket	EA	1	\$ 9.50



Find  
the right  
pump for your  
customers  
right here!

# The Industry Leader in Condensate Pump Technology.

DiversiTech offers more choices than  
anyone else in the industry!



**DIVERSITECH** 

**CONDENSATE PUMPS**

**ClearVue™ Pump**

No Float, No Problems! ClearVue's Floatless Sensor™ makes this the most advanced condensate pump ever. This new pump can provide up to 22' of lift if needed. ClearVue™ runs at the minimum speed needed, saving wear on the pump. The pump selects the lowest effective speed, making it quieter than a regular pump. Its unique self-cleaning feature senses problems and automatically enters a self-cleaning mode using condensate water to fix the issue. The ClearVue™ pump features a clear bottom tank to easily check the water level.

Other features include: stainless steel mounting tabs, silicone rubber feet, reversible deck, four inlet holes, and LED indicator lights.



**IQP-120**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>IQP-120</b>	ClearVue™ Pump – 120V – 0-22' Lift	EA	6	<b>\$ 35.50</b>
<b>IQP-120T</b>	ClearVue™ Pump w/Tube – 120V – 0-22' Lift	EA	6	<b>37.50</b>

**ClearVueKübe™**

ClearVueKübe™ condensate pump is the answer for ductless systems. Featuring a whisper quiet motor and small footprint, it is the ideal solution for handling condensate issues. The Kübe is designed for mini-split systems and includes a host of innovative features, all packed into a super quiet, super small pump that fits almost anywhere. ClearVueKübe™ is also available with a shroud cover set.



**IQP-KUBE**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>IQP-KUBE</b>	ClearVueKübe™ only	EA	6	<b>\$ 55.00</b>
<b>IQP-KUBE-SHROUD</b>	ClearVueKübe™ with shroud	EA	6	<b>68.00</b>

**ClearVue™ Mini Ductless System Pump**

Featuring super quiet operation, specifically designed for ductless system installations, and including Floatless Sensor™, ClearVue™ Mini is chock full of innovative features, and priced competitively.



**CVMINI**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>CVMINI</b>	ClearVue Mini - Ductless System Pump	EA	6	<b>\$ 63.50</b>

**CP-22 Pumps**

Suitable for use with condensate from high efficiency condensing furnaces and boilers which produce acidic condensate. 22' of lift compared to the typical 20'. Features include vibration dampening feet, motor mounts, metal hang tabs, four inlet holes, a clear indicator display, a float switch and check valve. Integrating the CP-22 into your system is easy. 1/4" quick connect terminals provide easy connection to the built in overflow switch. 2 terminals are provided allowing flexibility to connect air-handler shut-down.



**CP-22**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>CP-22</b>	Condensate Pump – 120V	EA	6	<b>\$ 24.25</b>
<b>CP-22T</b>	Condensate Pump – 120V w/20' 3/8" Tube	EA	6	<b>26.50</b>
<b>CP-22-230</b>	Condensate Pump – 230V	EA	6	<b>29.50</b>
<b>CP-22-230T</b>	Condensate Pump – 230V w/20' 3/8" Tube	EA	6	<b>31.75</b>

## CONDENSATE PUMPS cont'd

### Low Profile Pumps

The new CP-22LP comes packed with all the same great features found in the CP-22, but now in a low profile package. This pump is only 4 3/8" tall so it's a good fit for those instances where space is at a premium. The shorter reservoir holds 1/3 gallon. Suitable for use with condensate up to 160°F.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
CP-22LP	Condensate Pump – 120V – Low Profile	EA	6	\$ 28.25



CP-22LP

### General Purpose Pumps

DiversiTech's CP-16 condensate pump is an economical alternative that's based off of the proven CP-22 design. More compact than the CP-22, it's designed to lift to a maximum of 16 feet. It shares many of the features of the CP-22, including hang tabs, four inlet holes, float switch, overflow switch, and a check valve.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
CP-16	Condensate Pump 16' Lift 120V	EA	6	\$ 22.25
CP-16-230	Condensate Pump 16' Lift 230V	EA	6	24.95



CP-16

## WHIPS

### DiversiWhips

Liquid-tight flexible conduit system. A labor saving convenience kit for A/C unit hookup. Also use for heat pumps, refrigeration, hot tubs, swimming pools and outdoor lighting. Three distinct wire colors for ease of hook-up. 1 straight and 1 90° metallic or non-metallic connector. 90° connector\* is removable for straight connections. (Second straight connector not included.) U.L. & C.U.L. Listed.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
6-12-4	1/2 x 4' #10 THHN Wire – Metallic Connectors	EA	6	\$ 8.39
6-12-6	1/2 x 6' #10 THHN Wire – Metallic Connectors	EA	6	10.28
6-34-4	3/4 x 4' #8 THHN Wire – Metallic Connectors	EA	6	11.59
6-34-6	3/4 x 6' #8 THHN Wire – Metallic Connectors	EA	6	14.31
6-12-4NM	1/2 x 4' #10 THHN Wire – Non-Metallic Connectors	EA	6	6.80
6-12-6NM	1/2 x 6' #10 THHN Wire – Non-Metallic Connectors	EA	6	8.68
6-34-4NM	3/4 x 4' #8 THHN Wire – Non-Metallic Connectors	EA	6	8.98
6-34-6NM	3/4 x 6' #8 THHN Wire – Non-Metallic Connectors	EA	6	11.80



6-12-4

\*For DiversiWhips produced with 2 straight connectors, add S to part number (ex: 6-12-4S).

### DiversiWhips Pallet Packs

DiversiWhips are now available in a convenient, bulk-packaged pallet pack at a discounted price. Pallet pack makes an attractive floor-standing display. 1 straight and 1 90° metallic or non-metallic connector.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
B6-12-4	1/2 x 4' #10 THHN Wire – Metallic Connectors	EA	90	\$ 8.05
B6-12-6	1/2 x 6' #10 THHN Wire – Metallic Connectors	EA	60	9.86
B6-34-4	3/4 x 4' #8 THHN Wire – Metallic Connectors	EA	60	11.13
B6-34-6	3/4 x 6' #8 THHN Wire – Metallic Connectors	EA	45	13.73
B6-12-4NM	1/2 x 4' #10 THHN Wire – Non-Metallic Connectors	EA	90	6.53
B6-12-6NM	1/2 x 6' #10 THHN Wire – Non-Metallic Connectors	EA	60	8.34
B6-34-4NM	3/4 x 4' #8 THHN Wire – Non-Metallic Connectors	EA	60	8.62
B6-34-6NM	3/4 x 6' #8 THHN Wire – Non-Metallic Connectors	EA	45	11.33



B6-12-4

## CONDUIT, FITTINGS, CABLE

### Liquid Tite Flexible Conduit

For electrical applications: outside, inside and industrial uses including transformer connections, air conditioning and heating. Joins with metallic or non-metallic connectors, easy to cut. Impact resistant, chemical resistant, and will not kink. U.L. and C.U.L. Listed. For use as indicated in Article 351 of the 1987 NEC.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
750-12100	1/2" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1	\$ 26.50
750-34100	3/4" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1	34.50



### Liquid Tite Connectors

For use with metallic and non-metallic liquid tite conduit, Type B. Provides smooth connection, no sharp edges to strip wire. Wiring easily pulled through. U. L. Listed. C.U.L. Listed.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
750-NMLT50	1/2" Non-Metallic Straight Connector	EA	25	\$ 0.48
750-NMLT9050	1/2" Non-Metallic 90 Degree Elbow Connector	EA	10	0.80
750-NMLT75	3/4" Non-Metallic Straight Connector	EA	10	0.75
750-NMLT9075	3/4" Non-Metallic 90 Degree Elbow Connector	EA	10	1.15



## DISCONNECT SWITCHES

### DiversiTech Pull-out Disconnect Switches with Side Opening Door

- Fused models designed with fuses in pull-out handle for easy replacement
- Line, load, and ground terminals aligned for ease of wiring
- Reversible door – opens to the left or to the right
- Side opening door opens more than 180 degrees for maximum access
- Fused models have indicator lights for blown fuses
- Full dead front
- UL Listed IRF9, NEMA TYPE 3R: Raintight, Sleet Resistant – Outdoor
- US Patent Number 6,630,637.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
DDS-30	30A Fusible Disconnect Switch	EA	10	\$ 7.25
DDS-60	60A Fusible Disconnect Switch	EA	10	7.65
DDS-60U	60A Non-Fusible Disconnect Switch	EA	10	6.50



### DiversiTech Low-Profile Disconnect Switch

- Slightly smaller design than standard DiversiTech Disconnects
- Side opening door
- Full dead front
- UL Listed IRF9, NEMA TYPE 3R: Raintight, Sleet Resistant – Outdoor

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
EDS-60U	60A Non-Fusible Disconnect Switch	EA	10	\$ 5.95



## CAPACITORS

### Motor Run Capacitors – 370 VAC

Single capacitance. Oval, metal can.

CATALOG NO.	uf	CAN HT. INCHES	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
37050H	5	2.17	EA	1	\$ 0.65
37075H	7.5	2.17	EA	1	0.85
37100H	10	2.56	EA	1	1.05
37150H	15	2.95	EA	1	1.40



### Motor Run Capacitors – 370 VAC

Dual capacitance. Round, metal can.

CATALOG NO.	uf	CAN HT. INCHES	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
3GR0530	30+5	3.54	EA	1	\$ 2.85
3GR0535	35+5	3.74	EA	1	3.35
3GR0540	40+5	3.94	EA	1	3.65
3GR0545	45+5	3.74	EA	1	3.70



### Motor Run Capacitors – 440 VAC

Single capacitance. Oval, metal can.

CATALOG NO.	uf	CAN HT. INCHES	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
45050H	5	2.17	EA	1	\$ 0.95
45075H	7.5	2.17	EA	1	1.20
45100H	10	2.56	EA	1	1.40
45150H	15	2.95	EA	1	1.55



### Motor Run Capacitors – 440 VAC

Dual capacitance. Oval, metal can.

CATALOG NO.	uf	CAN HT. INCHES	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
4JJ0530	30+5	3.94	EA	1	\$ 2.90
4JJ0535	35+5	3.94	EA	1	3.65
4JJ0540	40+5	3.94	EA	1	3.75
4JJ0545	45+5	4.53	EA	1	3.95



### Motor Run Capacitors – 440 VAC

Dual capacitance. Round, metal can.

CATALOG NO.	uf	CAN HT. INCHES	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
4JR0525	25+5	3.54	EA	1	\$ 2.75
4JR0530	30+5	3.54	EA	1	2.85
4JR0535	35+5	3.74	EA	1	2.95
4JR0540	40+5	3.54	EA	1	3.10
4JR0545	45+5	3.74	EA	1	3.35
4JR0550	50+5	4.13	EA	1	3.75
4JR0555	55+5	4.92	EA	1	4.15
4JR0560	60+5	4.92	EA	1	4.95



## CAPACITORS cont'd

### SwitchCap™ Dual Multiple Value Capacitor

SwitchCap™ Dual Multiple Value Capacitor provides two, easily switchable capacitors in one simple package. Using easy to set switches rather than jumper wires, SwitchCap™ is the future of multiple value capacitors.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
SCAP-60D	SwitchCap™ Dual Multiple Value Capacitor	EA	6	\$ 33.50



## CONTACTORS

### DiversiTech Definite Purpose Contactors

Two pole, small frame.

CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
EC30224	30	24	EA	1	\$ 4.45
EC302120	30	120	EA	1	4.45
EC302240	30	240	EA	1	4.45
EC40224	40	24	EA	1	5.05
EC402120	40	120	EA	1	5.05
EC402240	40	240	EA	1	5.05



### DiversiTech Three Pole Definite Purpose Contactors

Three pole, large frame.

CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
EC30324	30	24	EA	1	\$ 8.00
EC303120	30	120	EA	1	8.00
EC303240	30	240	EA	1	8.00
EC40324	40	24	EA	1	8.50
EC403120	40	120	EA	1	8.50
EC403240	40	240	EA	1	8.50



## FUSES

### Dual Element Fuses – 250V

Provides time delay for temporary over-current conditions and motor running protection for heating and air conditioning equipment. Eliminates unnecessary maintenance from harmless overloads.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
7-CRNR15	15 Amps	EA	10	\$ 1.05
7-CRNR20	20 Amps	EA	10	1.05
7-CRNR25	25 Amps	EA	10	1.05
7-CRNR30	30 Amps	EA	10	1.05
7-CRNR35	35 Amps	EA	10	1.95
7-CRNR40	40 Amps	EA	10	1.95
7-CRNR45	45 Amps	EA	10	1.95
7-CRNR50	50 Amps	EA	10	1.95
7-CRNR60	60 Amps	EA	10	1.95



U.L. Class RK-5, Standard for Safety 198E, Current Limiting Fuses, Interrupting Rating 200,000 Amps. rms. A.C.

## CONDENSATE DRAIN LINE SWITCHES

### Wet Switch Flood Detector

A solid state control designed to help prevent flooding, damage to carpets, walls, furniture, ceilings, etc. Now has a built-in test and reset button for easier installation. Turns system off when detecting moisture due to condensate or drain leaks. One or two drops will cause Wet Switch to turn off a unit, alerting a serviceman to a moisture problem. A lit LED indicates the Wet Switch is activated and has turned the unit off. Reset simply by drying the absorbent pad with a paper towel and pressing the reset switch. Connects to 24 VAC. More than one unit may be connected to a system. 2 amp contact rating. Simple 5 wire installation. Sales displays available.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
WS-1	Wet Switch Flood Detector	EA	1	\$ 23.50




### Condensate Cop™

A unique clamp-on float switch intended for HVAC drain pan installation. The Condensate Cop™ features a large over-clamping area that fits easily over the edge of all types of drain pans; including formed plastic and galvanized sheet metal.

A separate float/probe assembly swivels to accommodate drain pans having sloped sides. The swivel action allows the installer to position the float switch for best operation and then clamp it into place. The probe features an inlet grill which prevents the float from being blocked or damaged by insulation or other debris. Sealed inside the probe is a magnetically actuated normally closed switch. The switch opens when rising water presents a potential flooding condition. Two wire connection for easy hook up to a thermostat "Y" (compressor) circuit. Provided complete with 5' (1.5 meter) leads, wire nuts, and clamping screws. Small size, 24V/1.5 amp NC reed switch.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
CC-1	Condensate Cop™ Drain Pan Switch	EA	12	\$ 4.00



### Safety Overflow Switch (SOS)

Designed for use on 3/4" PVC condensate drain line. Snaps easily over existing drain line tubing and can be glued in place using PVC cement. The SOS electronically senses water near the inside wall of the PVC drain tubing. By locating the SOS with its body away from the normal flow, it can be used to detect a possible overflow condition when the PVC drain line becomes full with water. Like a culvert, the condensate drain line is normally mostly empty with a small amount of water flowing in the lower parts of the horizontal run. Since the sensor component of the SOS only covers part of the tubing, a low volume of flowing water does not activate the switch. The pipe must be full or near full to activate the switch. Mount SOS horizontally, vertically, or at any angle.

Works with 24 VAC control circuits and typical contactors. When not detecting water, the SOS is normally closed and allows normal air conditioner operation. When water approaches the SOS's sensor, the switch triggers, and the control circuit is opened. The LED indicator lights to show that there may be system trouble, and the SOS is doing its job. Includes press to test switch.

Furnished complete with switch, 5' (1.5 meter) 18 AWG, 2 wire lead, and a 3/4" PVC male fitting adapter for direct coupling to a primary pan drain line connection. Now available with Push to Test button.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
SOS-1	Safety Overflow Switch	EA	1	\$ 11.25



### Condensate Switches

DiversiTech Flood Prevention Switches are simple to install, easy to service and extremely reliable. As water level in the auxiliary or main drain pipe rises due to a clogged air conditioning condensate drain, the switch shuts off the system—thus preventing water from overflowing and causing damage to doors, walls and ceilings. At the heart of the switch is a durable yet precise magnetic reed switch. Constructed of materials that will not rust or stick, the switch operates smoothly every time.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
CS-1	Condensate Switch – Tee	EA	12	\$ 8.60
CS-2	Condensate Switch – Elbow	EA	12	7.60
CS-3	Condensate Switch – Clip	EA	12	4.60






**CONDENSATE DRAIN PANS, FITTINGS, ADAPTERS**

**High Rise Pans™**

The High Rise Pan™ is an innovative new plastic drain pan design which allows placement of an air handler 2 3/4" above the outside lip of the pan without the need for separate, cumbersome mounting blocks. The pan has a molded-in network of risers to give a 5" lift. The risers are positioned to accept a wide variety of air handler sizes. Each riser has a specially shaped area at each end to accommodate a 2" x 2" anti-vibration pad which allows for quiet operation at all times. Other features include heavy duty reinforcement throughout to give plenty of support as well as rolled edges for durability. One-piece plastic construction ensures no rust, leaks, or seams to split. Each High Rise Pan™ comes complete with a Condensate Cop™ float switch, 6 EVA™ anti-vibration pads, and 1 3/4" PVC male adapter. Installation is straightforward and hassle-free.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
6-HK2748	High Rise Pan™ 27" x 48" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5	\$ 36.50
6-HK2766	High Rise Pan™ 27" x 66" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5	42.00
6-HK3050	High Rise Pan™ 30" x 50" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5	34.90
6-HK3060	High Rise Pan™ 30" x 60" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5	37.25

**A/C Secondary Condensate Drain Pans**

Rolled edges for durability, ribbed bottoms for rigidity, and reinforced corners for strength. 3/4" PVC fittings are included with each pan. No seams, no rust, and no leakage. ABS materials will not put out toxic smoke. Available in over 20 convenient sizes. Five pans per clip.



CATALOG NO.	BOTTOM DIMENSION IN.	BOTTOM DIMENSION CM.	OVERALL DIMENSION IN.	OVERALL DIMENSION CM.	DEPTH IN.	DEPTH CM.	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
6-2739L	27" x 39"	69 x 99	29" x 41"	74 x 104	2"	5	EA	5	\$ 13.60
6-2748L	27" x 48"	69 x 122	29" x 50"	74 x 127	2"	5	EA	5	14.25
6-2763L	27" x 63"	69 x 160	29" x 65"	74 x 165	2"	5	EA	5	17.50
6-3030L	30" x 30"	76 x 76	32" x 32"	81 x 81	2"	5	EA	5	10.25
6-3050L	30" x 50"	76 x 127	32" x 52"	81 x 132	2"	5	EA	5	16.25
6-3060L	30" x 60"	76 x 152	32" x 62"	81 x 157	2"	5	EA	5	17.60
6-3263L	32" x 63"	81 x 160	34" x 65"	86 x 165	2"	5	EA	5	18.85

L = Drain Line Outlets in Long Side

**HARD START KITS**

**Torque Plus – DST-5 300% Boost, DST-6 500% Boost**

Totally solid state, our DST-5 is just right for all permanent split capacitor (PSC) compressors from 1/2 to 10 H.P. It can be used on units that operate on 120 through 288 Volts. The DST-6 offers a larger capacitor for severely hard-to-start compressors. The DST-6 can be used on all PSC single phase compressors from 1-1/2 to 10 H.P. A unique combination of relay and safety timer. The capacitor is automatically disconnected in 0.5 seconds if the compressor fails to start.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
DST-5	Torque Plus – 300% Torque Multiplier	EA	1	\$ 5.25
DST-6	Torque Plus – 500% Torque Multiplier	EA	1	7.25

**DiversiTech Hard Start Kits**

DiversiTech hard start kits reduce contractor call backs by boosting the starting capacitor for a compressor. This prevents home brownouts and improves homeowner satisfaction with your service. DiversiTech's hard start kits feature a potential relay that disconnects the start capacitor from the circuit at exactly the moment it is no longer needed to boost the compressor. This results in a precision compressor start even under hard starting conditions. Replaces the Kickstart KS-1 and the 5-n-1 kit.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
HSK1	Hard Start Kit for 3.5 to 5HP Compressor	EA	1	\$ 22.00
HSK5	Hard Start Kit for 1 to 3HP Compressor	EA	1	19.00

# TrueStart® Hot Surface Igniters

# TRUE START®

## IGNITERS

*Getting it right the first time*

***TrueStart® hot surface igniters have been 100% tested and approved.***

***TrueStart® hot surface igniters are completely reliable right out of the package and are certified by CSA for use in electrical equipment.***



**Made in U.S.A.**

**Replaces  
Hundreds  
of OEM  
Igniters**



## TRUESTART® PRODUCTS

### TrueStart® Hot Surface Igniters

Featuring protective, dynamic, informative packaging, TrueStart® hot surface igniters are 100% tested, completely reliable, and compatible with all OEM furnaces. They are available as direct replacement for OEM (silicon carbide) or as a universal igniter (silicon carbide or silicon nitride). Universal hot surface igniters allow a contractor to reduce truck stock and replace hundreds of OEM igniters with just one SKU.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
IGN-001	TrueStart® Hot Surface Igniter, Universal, Silicon Carbide	EA	6	\$ 11.25
IGN-1F	TrueStart® Hot Surface Igniter, Universal, Flat, Silicon Nitride	EA	6	18.50
IGN-1R	TrueStart® Hot Surface Igniter, Universal, Round, Silicon Nitride	EA	6	15.90
IGN-2	Wolverine Hot Surface Igniter by TrueStart, Universal, Silicon Nitride	EA	6	17.75
IGN-2-6P	IGN-2 Wolverine Hot Surface Igniter – Contractor Pack, pack of 6	PK	1	103.50
IGN-401	TrueStart® Hot Surface Igniter, Direct Replacement, Silicon Carbide	EA	6	11.25
IGN-402	TrueStart® Hot Surface Igniter, Direct Replacement, Silicon Carbide	EA	6	11.25
IGN-403	TrueStart® Hot Surface Igniter, Direct Replacement, Silicon Carbide	EA	6	11.25
IGN-409	TrueStart® Hot Surface Igniter, Direct Replacement, Silicon Carbide	EA	6	11.25



### Flame Sensors

TrueStart® flame sensors are a direct replacement for Carrier/BDP flame sensors, cross reference part numbers are detailed in the item descriptions. TrueStart® flame sensors are not manufactured by Carrier Corporation.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
900-3	TrueStart® FLAME SENSOR replaces Carrier® LH33WZ516	EA	1	\$ 5.75
900-4	TrueStart® FLAME SENSOR replaces Carrier® LH33WZ517	EA	1	5.75
900-5	TrueStart® FLAME SENSOR replaces Carrier® LH33WZ518	EA	1	5.75
900-6	TrueStart® FLAME SENSOR replaces Carrier® LH33WZ520	EA	1	5.75



### Pilot Burners

TrueStart® pilot burners are a direct replacement for Carrier/BDP pilot burners. Available in 2-wire and 3-wire versions. The 3-wire is also field convertible to a 2-wire. TrueStart® pilot burners are not manufactured by Carrier Corporation.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
FC-73	2 Wire Pilot Burner – Replacement for the Carrier® 732, 2 wire pilot burner commonly known as Carrier®/BDP part number LH33J2053	EA	1	\$ 35.00
FC-74	3 Wire Pilot Burner – Replacement for the Carrier® 740A, 3 wire pilot burner commonly known as Carrier®/BDP part number LH680005	EA	1	37.50
FC-82	Blower on Relay – Replacement for the Carrier®/BDP 821 Blower on Relay commonly known as Carrier® part number HN680001	EA	1	41.00
FC-87	Spark Electrode – Replacement for the Carrier®/BDP 871 Spark Electrode commonly known as Carrier®/BDP part number LH680512	EA	1	10.88



## GAS CONNECTORS

### DiversiTech Gas Connectors

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
D20-3132-18	Gas Connector – 18" long, 1/2" OD x 3/8" ID, M x F	EA	12	\$ 4.48
D20-3132-24	Gas Connector – 24" long, 1/2" OD x 3/8" ID, M x F	EA	12	5.10
D20-3132-36	Gas Connector – 36" long, 1/2" OD x 3/8" ID, M x F	EA	12	6.38
D20-3132-48	Gas Connector – 48" long, 1/2" OD x 3/8" ID, M x F	EA	12	7.65
D30-3131-24	Gas Connector – 24" long, 5/8" OD x 1/2" ID, M x M	EA	12	6.05
D30-3131-36	Gas Connector – 36" long, 5/8" OD x 1/2" ID, M x M	EA	12	7.32
D30-3131-48	Gas Connector – 48" long, 5/8" OD x 1/2" ID, M x M	EA	12	8.58
D30-3132-18	Gas Connector – 18" long, 5/8" OD x 1/2" ID, M x F	EA	12	5.42
D30-3132-24	Gas Connector – 24" long, 5/8" OD x 1/2" ID, M x F	EA	12	6.05
D30-3132-36	Gas Connector – 36" long, 5/8" OD x 1/2" ID, M x F	EA	12	7.32
D30-3132-48	Gas Connector – 48" long, 5/8" OD x 1/2" ID, M x F	EA	12	8.58



**SMOKE AND CARBON MONOXIDE DETECTORS**

**Combination Ionization Smoke Alarm and Carbon Monoxide Alarm, AC Electrical**

- QUICK-DRAW® – convenient pull-out drawer for easy battery replacement
- Silencer Feature – convenient silencer button with automatic reset allows you to temporarily override smoke alarm—ideal for cooking smoke and fireplaces—eliminates nuisance alarms
- 9V Battery Backup in Event of AC Power Failure
- Alkaline Battery Included
- Low Battery Audible Indicator
- Battery Pull-Tab
- Smart Interconnect up to 18 units – with 12 smoke alarms maximum
- Alarm Sounds and Red LED Indicator FLASHES
- 3 LED Alarm Condition Indicators
- Green LED Indicator for AC Power
- Mounting Plate Attached to Junction Box and Covers Dry Wall Cutout – for easy installation and coverage of drywall cutouts
- End-of-Life Notification – warns after approximately 6 years of operation from initial power up
- Includes Dust Cover
- 120 VAC (60 Hz) 0.1 Amp
- Mounts on Single, Gang or 3 1/4" (80mm) Octagon Junction Box
- Five Year Limited Warranty
- UL Listed



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
USI-7795	CO/Smoke Detector, hard wired	EA	6	\$ 32.99

**Combination Ionization Smoke and Carbon Monoxide Alarm**

- Combination Smoke and Carbon Monoxide Alarm
- Separate Sensors to Detect Smoke or Carbon Monoxide
- QUICK-DRAW® – convenient pull-out drawer for easy battery replacement
- Easy Battery Replacement
- Silencer Feature – convenient silencer button with automatic reset allows you to temporarily override smoke alarm—ideal for cooking smoke and fireplaces—eliminates nuisance alarms
- 9 Volt Super Heavy-Duty Battery Included
- LED Alarm Condition Indicators
- Loud 85 dB Alarm
- End-of-Life Notification – warns after approximately 6 years of operation from initial power up
- Test/Silence Button
- Five Year Limited Warranty



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
CD-9775-C	CO/Smoke Detector, battery operated	EA	6	\$ 29.54

**Carbon Monoxide Alarm, Battery, Standard Series**

- Battery Operated – Alkaline Battery Included
- Fast and Easy to Install – No Wiring Required
- Optochemical Sensor Technology
  - Resistant to Nuisance Alarms
  - Extends Sensor Life
  - Provides Fail-Safe Notification
- Easy Access Test/Reset Button
- Red Alarm LED
- Loud 85 Decibel Horn
- Audible Low Battery Warning Signal
- End-of-Life Notification – warns after approximately 6 years of operation from initial power up
- Five Year Limited Warranty



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
CD-9000-C	CO Detector, battery operated	EA	6	\$ 20.08

## COPPER FITTINGS

### Coupling (Socket) with Rolled Tube Stop C x C

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
C165-0002	3/8"	1/4"	EA	25	\$ 0.14
C165-0050	5/8"	1/2"	EA	25	0.27
C165-0090	3/4"	5/8"	EA	25	0.42
C165-0100	7/8"	3/4"	EA	25	0.59
C165-0150	1-1/8"	1"	EA	10	1.15




### 45 Degree Ell C x C

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
C290-0002	3/8"	1/4"	EA	25	\$ 0.23
C290-0050	5/8"	1/2"	EA	25	0.66
C290-0090	3/4"	5/8"	EA	25	0.72
C290-0100	7/8"	3/4"	EA	25	0.99
C290-0150	1-1/8"	1"	EA	10	1.81



### 90 Degree Ell C x C

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
C235-0050	5/8"	1/2"	EA	25	\$ 0.44
C235-0090	3/4"	5/8"	EA	25	0.80
C235-0100	7/8"	3/4"	EA	25	0.99
C235-0150	1-1/8"	1"	EA	10	1.82



### 90 Degree Long Turn Ell C x C

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
C242-0002	3/8"	1/4"	EA	25	\$ 0.29
C242-0050	5/8"	1/2"	EA	25	0.60
C242-0090	3/4"	5/8"	EA	25	1.02
C242-0100	7/8"	3/4"	EA	10	1.72
C242-0150	1-1/8"	1"	EA	10	2.51



### 90 Degree Long Turn Street Ell

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
C272-0002	3/8"	1/4"	EA	25	\$ 0.41
C272-0050	5/8"	1/2"	EA	25	0.70
C272-0090	3/4"	5/8"	EA	25	1.10
C272-0100	7/8"	3/4"	EA	10	1.43
C272-0150	1-1/8"	1"	EA	10	2.91



## WIRE/CABLE TIES, MOUNTS, CLAMPS

### Heavy Duty Cable Ties

6.6 nylon, the heavy duty duct straps feature smooth insertion, and a locking mechanism that gives ductwork a firm hold. Accommodates 7 to 15 inch duct.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>7-P36</b>	36" Long – Fits up to 10" Duct – 175 lb. Tensile	EA	50	<b>\$ 0.14</b>
<b>7-P36B</b>	36" Long – Black – Fits up to 10" Duct – 175 lb. Tensile	EA	50	<b>0.15</b>
<b>7-P48</b>	48" Long – Fits up to 14" Duct – 175 lb. Tensile	EA	50	<b>0.28</b>
<b>7-P48B</b>	48" Long – Black – Fits up to 14" Duct – 175 lb. Tensile	EA	50	<b>0.29</b>

7-P24



## TERMINALS, CONNECTORS

### Compressor Repair Kit

Finally, a product that simplifies the repair of burned or damaged spade terminals when reconnecting or replacing a compressor. Fits both non-burned and burned terminals. Connects to the compressor via precision brass cylinders that fit over the terminals and connect with stainless steel set screws. Wires are permanently attached. Standard factory 600V, 65 strand machine wire. Easy to install and guaranteed for the life of the compressor.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>TLC-3-8</b>	3 Wire, 8 Gauge Connection Kit	EA	1	<b>\$ 23.50</b>
<b>TLC-3-10</b>	3 Wire, 10 Gauge Connection Kit	EA	1	<b>18.50</b>
<b>TLC-3-12</b>	3 Wire, 12 Gauge Connection Kit	EA	1	<b>17.25</b>

TLC-3-8



## SEALING COMPOUNDS

### Black Jack® Roof Cement

Black Jack® All-Weather Roof Cement is an asphalt based patching compound designed to repair cracks, splits, seams and holes in roofing materials. It also works great in new construction and in setting flashings, drip edges and roofing material edges.

- Use in wet or dry conditions
- Seals flashings, and other roof projections
- Fiber reinforced
- Thick trowel grade

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>RM-1G</b>	Black Jack All Weather Roof Cement – 1 gallon	EA	6	<b>\$ 8.25</b>
<b>RM-10</b>	Black Jack All Weather Roof Cement – 10 oz. tube	EA	12	<b>1.95</b>

RM-1G

RM-10



## DRAIN LINE, HOSE

### Clear Vinyl Tubing

Clear vinyl hose applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.


CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
7-14	1/4" ID Clear Vinyl Tubing	EA	100'	\$ 4.90
7-38	3/8" ID Clear Vinyl Tubing	EA	100'	5.50
7-12	1/2" ID Clear Vinyl Tubing	EA	100'	8.25
7-58	5/8" ID Clear Vinyl Tubing	EA	100'	10.50
7-34	3/4" ID Clear Vinyl Tubing	EA	100'	14.75
7-78	7/8" ID Clear Vinyl Tubing	EA	50'	10.95



## TUBE AND TRAPS

### Traps (Slip x Slip)


CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
5-408	3/4" "P" Trap (Slip x Slip)	EA	100	\$ 0.38
5-409	3/4" Running Trap (Slip x Slip)	EA	100	0.38



## VENTILATION PRODUCTS

### Duct Fans

Features electrical junction box for UL and code compliant electrical connection. Efficiently increases air circulation, keeps room temperatures consistent, and lowers heating/cooling costs. Metal construction, powerful no-maintenance motors and a one-use thermal fuse mean these fans will be up to the task for years. Straightforward installation into any 120V system with detailed instructions, templates, and diagrams. Many sizes available. A great way to give slow vents a boost. Conforms to UL STD 507, Certified to CSA STD C22.2 #113




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
625-AF6	Duct Fan 6" dia., 240 CFM, 37W	EA	1	\$ 13.30
625-AF8	Duct Fan 8" dia., 420 CFM, 37W	EA	1	16.95
625-AF10	Duct Fan 10" dia., 650 CFM, 35W	EA	1	24.60
625-AF12	Duct Fan 12" dia., 975 CFM, 65W	EA	1	35.00
625-AF14	Duct Fan 14" dia., 1350 CFM, 65W	EA	1	41.00

### Concentric Vents

New Concentric Vents make it easier to have a two-pipe installation for high efficiency furnaces. These vents simplify installation and only require one hole through the wall or roof where the pipes terminate. Without using these vents, the installation would require cutting two holes through the home (2" or 3" depending on the furnace), one for each pipe. These vents save time and money by reducing the amount of work required. Available in 2" and 3" intake vent sizes.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
CVENT-2	2" Concentric Vent	EA	4	\$ 18.66
CVENT-3	3" Concentric Vent	EA	4	24.25



## DRIERS, SIGHT GLASSES

### Bi Flow Driers

The "DBF" Series is designed specifically for heat pump or reverse cycle application. External check valves are not required since they are incorporated within the filter dryer shell. The core design filters out contaminant particles down to 25 microns. 100% copper sweat or nickel plated flare fittings. Desiccant core provides reliable and effective, removal of solid contaminants, acid and moisture. Provides three times the filtration as the standard bi-flow. Core is cushioned in fiber gaskets to protect core and to insure trouble-free performance. Powder paint exterior coating surpasses 500 hour ASTM salt spray test and resists corrosion.

CATALOG NO.	DESCRIPTION <sup>o</sup>	CONNECTION	CUBIC INCH	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>DBF083S</b>	Drier, Bi Flow, V2A-083 Sweat	8	3/8	EA	1	<b>\$ 10.95</b>
<b>DBF163S</b>	Drier, Bi Flow, V2A-163 Sweat	16	3/8	EA	1	<b>15.25</b>



### Liquid Line Driers

High moisture and acid capacity. Maximum filtration capacity. Exceptional compatibility with new polyester oils. Compatible with all existing and new refrigerants and blends including 134a, 401A/B, 402A/B, 404A, 407A/B/C, 410A, 502, 507A. Spring loaded, molecular sieve and activated alumina. Solid copper sweat fittings. Powder paint exterior coating surpasses 500 hour ASTM salt spray test and resists corrosion. Eliminates concern of additive stripping.

CATALOG NO.	DESCRIPTION	CONNECTION	CUBIC INCH	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>DAD083S</b>	Drier, Liquid Line, WLD-083 Sweat	8	3/8	EA	1	<b>\$ 5.65</b>
<b>DAD163S</b>	Drier, Liquid Line, WLD-163 Sweat	16	3/8	EA	1	<b>7.25</b>




## COIL CLEANERS

### Triple-D™ Universal Coil Cleaner

Triple-D™ is a Universal Coil Cleaner suitable for use on condenser *and* evaporator coils. Metal safe and does not attack aluminum or copper coil components, extending equipment life and diminishing potential for refrigerant leaks. Safe for rooftop units. In liquid form, Triple-D™ is super concentrated. A single gallon of concentrate makes 75% more mixed coil cleaner than conventional concentrations. The liquid concentrate is also NSF Registered, assuring that it is safe as a cleaner in restaurants, hospitals, government institutions, and any food preparation area (rinse thoroughly after use). Triple-D™ is a safer, more versatile product than conventional acid or non-acid coil cleaners. One product does it all – truly a Universal Coil Cleaner.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>TRIPLE-D</b>	Triple-D™ – 1 gallon concentrate	EA	4	<b>\$ 9.75</b>

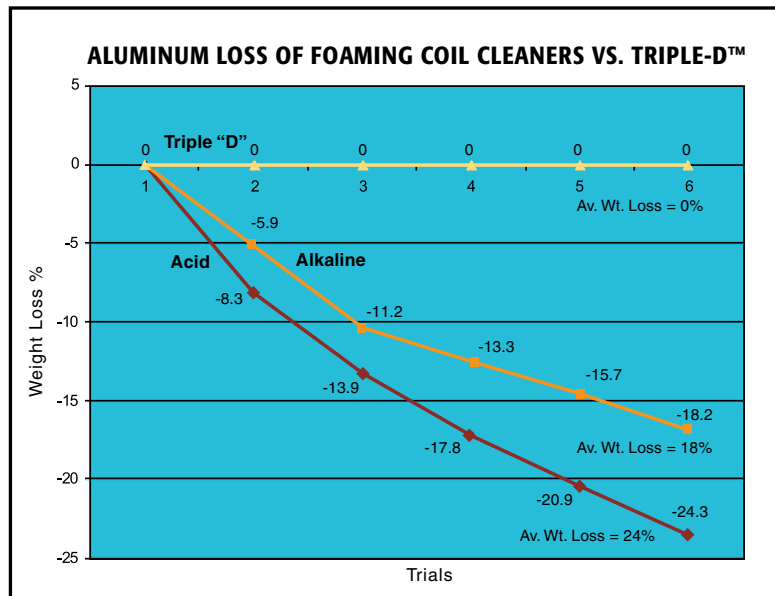

Conventional foaming acid and non-acid coil cleaners attack and chemically react with the aluminum coil components. This reaction is exhibited by a foaming action. The attack/reaction dissolves the aluminum, destroying the heat-transfer ability of the coil and creating the potential for refrigerant leaks.



# Triple-D™

## Universal Coil Cleaner™

Triple-D™ is a Universal Coil Cleaner™ suitable for use on condenser and evaporator coils. It is metal safe and does not attack aluminum or copper coil components, extending equipment life and diminishing potential for refrigerant leaks. Triple-D™ is a safer, more versatile product than conventional acid or non-acid coil cleaners.

All of the organic materials in this product are readily biodegradable

**BIODEGRADABLE**



- Metal Safe
- Biodegradable
- Super Concentrated
- Inhibited Non-Acid Formulation
- Available in Multiple Packages/Forms
- Non-Foaming/Non-Toxic
- Safe for Rubber Roofs
- Corrosion Inhibited
- NSF Registered



See why you should use Triple-D™

**One product does it all – truly a Universal Coil Cleaner™**

**Pro-Red Plus™**

Pro-Red Plus™ Non-Acid Coil Cleaner and Brightener is an easy to use, concentrated, fast-acting product that foams and lifts away stubborn deposits from air-cooled condensers and coils. It removes tarnish and corrosion deposits, and leaves a bright clean shine on aluminum and copper coils. Pro-Red Plus™ Non-Acid Coil Cleaner and Brightener cleans by chemical action. Its brightening properties are as effective as conventional acid coil cleaners, but Pro-Red Plus™ does not contain extremely toxic hydrofluoric acid. The vigorous foaming action eliminates the need for prolonged soaking, steam cleaning or scrubbing coils. Non-acid formula does not emit corrosive fumes, and will not rust ferrous metals.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>PRO-RED+</b>	Pro-Red Plus™ Cleaner and Brightener (non-acid) – 1 gallon container	EA	4	<b>\$ 7.49</b>

**PRO-RED+**



**Pro-Blue™**

Pro-Blue™ is a heavy-foaming, alkaline-based coil cleaner which will assist in removing the build-up on your air-cooled condenser. Buy Pro-Blue™ and help your condenser look as good as new.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>PRO-BLUE</b>	Pro-Blue™ Foaming Concentrate (non-acid) – 1 gallon container	EA	4	<b>\$ 6.50</b>

**PRO-BLUE**



**Pro-Yellow™**

Pro-Yellow™ is an easy to apply, non-acid coil cleaner and brightener. This effective formula quickly removes dirt and grime from outdoor coils and leaves them clean and bright. It's strong foaming action removes even stubborn deposits easily.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>PRO-YELLOW</b>	Pro-Yellow™ (non-toxic) – 1 gallon container	EA	4	<b>\$ 6.50</b>

**PRO-YELLOW**



**Pro-Green™**

The Pro-Green™ is a non-toxic, self rinsing evaporative coil cleaner which is a safe-to-use product on your evaporator coils. This coil cleaner can also be used on air-cooled condensers, electronic filters and fan blades.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>PRO-GREEN</b>	Pro-Green™ No Rinse (non-toxic) – 1 gallon container	EA	4	<b>\$ 6.35</b>

**PRO-GREEN**



**Pro-Brown™**

An ultra-high foaming formula that pulls out deeply embedded dirt. The fast, dual-action formula cleans and brightens. Pro-Brown™ is biodegradable and safer than foaming hydrofluoric acid cleaners.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>PRO-BROWN</b>	Pro-Brown™ Foaming Coil Cleaner – 1 gallon container	EA	4	<b>\$ 8.65</b>

**PRO-BROWN**



**MOUNTING BRACKETS, BLOCKS**

**Air Conditioner Brackets**

These heavy duty 1/8" thick steel AC brackets are perfect for hanging A/C condensers and heat pumps outside the home. Mount at any height to allow for easy maintenance under units. No need to wait for finished grade or landscaping prior to installation of AC unit. Pre-punched holes for easy installation. Powder coated gray finish. Load rating 600 lbs. per pair.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>ACB-30</b>	AC Mounting Bracket – 30", pack of 2	PK	1	<b>\$ 16.50</b>
<b>ACB-36</b>	AC Mounting Bracket – 36", pack of 2	PK	1	<b>18.75</b>
<b>ACB-42</b>	AC Mounting Bracket – 42", pack of 2	PK	1	<b>21.60</b>
<b>ACB-48</b>	AC Mounting Bracket – 48", pack of 2	PK	1	<b>23.40</b>

**FLUSHING PRODUCTS**

**Pro-Flush™ HVAC Flushing Solvent**

For A/C and refrigeration systems formulated for R-410A retrofits, refrigerant conversions and compressor burnouts. Compatible with all refrigerants and compressor oils. All solvents in Pro-Flush™ are non-VOC and conform to EPA SNAP standards: low toxicity and residue-free.

Available as a kit or in a 16 oz. solvent refill. The kit makes servicing quick, easy, and safe, as well as assuring you get to the job site with all necessary hardware in hand for 1-stop servicing. The kit includes: 16 oz. container of Pro-Flush™ solvent, refillable Pro-Flush™ injector tool pressure tank, pressure relief valve for added safety, large rubber adapter that flushes up to 1-1/4" line sets, service hose.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>PF-KIT</b>	Pro-Flush™ Kit – injector, 16 oz. refill, nozzle adapter and hose	EA	4	<b>\$ 59.50</b>
<b>PF-16</b>	Pro-Flush™ HVAC Flushing Solvent – 16 oz. Refill	EA	6	<b>28.50</b>

**DRAIN GUN AND CARTRIDGES**

**Charles Gallo brand Drain Gun and SWOOSH CO<sub>2</sub> Cartridges**

Clears condensate drains with a SWOOSH! A lightweight (3 oz.) portable tool designed to blow out drain lines instantly. New larger SWOOSH CO<sub>2</sub> cartridges now deliver 1200 PSI of oil free food grade to clear the line. Each unit comes equipped with a tapered fitting to work on 3/8" – 3/4" drain openings. Flexible hose assembly maneuvers through cabinets, coils and hard to reach drains. Cartridges are environmentally safe and recyclable. No need for air or nitrogen tanks. Reduces labor costs and time on service calls.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE	SPECIAL NET PRICE
<b>GG-1</b>	Charles Gallo Drain Gun for A/C Condensate Lines	EA	6	<b>\$ 23.10</b>
<b>GGC-12</b>	SWOOSH CO <sub>2</sub> Cartridges, pack of 12	PK	6	<b>14.75</b>

## **ABOUT DIVERSITECH**

DiversiTech Corporation is North America's largest manufacturer of equipment pads and a leading manufacturer and supplier of components and related products for the heating, ventilating, air conditioning, and refrigeration (HVACR) industry.

Headquartered in the Atlanta, GA metropolitan area, DiversiTech manufactures a suite of products which includes a wide range of mechanical, electrical, chemical, and structural parts for HVACR and electrical systems, and swimming pool installations. The company maintains manufacturing and distribution facilities in key U.S. locations, Europe, and in the Far East. DiversiTech has enjoyed a continued history of successful growth and has acquired industry-recognized names including Devco® Enterprises, Wagner® Manufacturing, The Black Pad®, Hef-T-Pad™, and Specialty Chemical.



6650 Sugarloaf Parkway  
Duluth, GA 30097

**678.542.3600**  
**800.995.2222**  
**678.542.3700 Fax**  
**[www.diversitech.com](http://www.diversitech.com)**

Download an electronic copy of this catalog at  
<http://media.diversitech.com/doc/DOC32494.pdf>

Send edits/corrections/comments on this  
catalog to [feedback@diversitech.com](mailto:feedback@diversitech.com)