


### Return Grille & Filter


Includes throwaway filter, two duct bands, and clips.  
Rough-in dimensions are shown.




1 Ea./Box

P/N	Duct Dia.	Dimensions		Filter size
		A	B	
UPC-01-1218	12 (300)	20.25 (514)	14.25 (362)	14 x 20 (350 x 500)
UPC-01-2430	14 (350)	25.25 (631)	14.25 (362)	14 x 25 (350 x 625)
UPC-01-3642	18 (450)	30.25 (756)	14.25 (362)	14 x 30 (350 x 750)
UPC-01-4860	20 (508)	30.25 (756)	24.25 (594)	24 x 30 (610 x 750)
UPC-01-4860NC	20 (508)	30.25 (756)	20.25 (514)	20 x 30 (500 x 750)

### Air Filter



1.0 (25) Pleated




1.0 (25) Throwaway

P/N	SIZE	TYPE
A00558-001	14 x 25 (350 x 625)	Pleated
A00558-002	14 x 30 (350 x 750)	Pleated
A00558-003	18 x 20 (457 x 500)	Pleated
A00558-004	18 x 25 (457 x 625)	Pleated
A00558-005	18 x 18 (457 x 457)	Pleated
A00558-006	24 x 30 (610 x 750)	Pleated
A00097-005	14 x 25 (350 x 625)	Throwaway
A00097-006	14 x 30 (350 x 750)	Throwaway
A00097-007	14 x 20 (350 x 500)	Throwaway
A00097-008	14 x 38 (350 x 965)	Throwaway
A00097-009	24 x 30 (610 x 750)	Throwaway
A00097-010	20 x 30 (500 x 750)	Throwaway

### Adapter, Return Air, Cooling Module


Includes insulation wrap shipped loose.

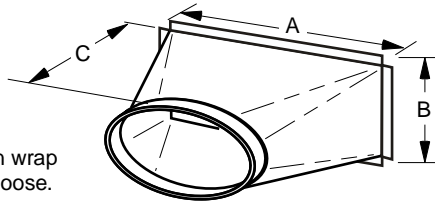

1 Ea./Box

P/N	Used On	Duct Dia.	Overall Dimensions		
			A	B	C
UPC-59-2430	2430	14 (350)	23 (575)	13.5 (338)	11.5 (288)
UPC-59-3642	3642	18 (450)	35 (875)	13.5 (338)	10.5 (263)
UPC-59-4860	4860	20 (508)	35 (875)	11.5 (292)	15.0 (381)

### Return Air Duct




1 Ea./Box

- Tough Aluminized outer mylar wrap
- Spun-bonded nylon and helical wire core
- 1" (25 mm) Fiberglass insulation, R-4.2
- 10 ft (3050 mm) lengths

P/N	Used On	Dia.
UPC-04-1218	1218	12.0 (300)
UPC-04-2430	2430	14.0 (350)
UPC-04-3642	3642	18.0 (450)
UPC-04-4860	4860	20.0 (508)

### Adapter, Return Air, Heating Module




1 each/box

- Mates directly to Heating Module or Vertical Plenum Module
- No additional fabrication
- Can be used on either horizontal or vertical installations

Model	W	Duct Diameter
UPC-104-2430	25 (635)	14 (350)
UPC-104-3642	38 (965)	18 (450)
UPC-104-4860	38 (965)	20 (508)

### Adapter, Return Air, M1218




1 each/box

- Mates directly to air handler
- No additional fabrication
- Can be used on either horizontal or vertical installations


Model: UPC-104-1218  
Duct Diameter: 12.0 (305)

### Outlet Kits (1 Outlet)

- UPC-80F-1 Outlet Kit for 1-inch Fiberglass Plenum
- UPC-80M-1 Outlet Kit for Metal Plenum



1 — 12 ft. (3660 mm) Sound Attenuator



1 — Supply Outlet (White)



2 — Scrim Core Clamps (Stamped '575')



2 — Supply Tubing Clamps (Stamped '605', Painted Black)




2 — Toggles and Screws



1 — Winter Supply Shutoff



1 — Coupling with Tape Rings




1 — Balancing Orifice Kit for one outlet, includes (1) balancing cap, (1) 35% reducer disk, and (1) 50% reducer disk

*UPC-80F only*



1 — Fiberglass Spin-In Take-off

*UPC-80M only*




1 — Metal Take-off with gasket and tape ring

### Installation Kits (6 or 8 Outlets)

- UPC-89F-6/8 Kit for 1-inch Fiberglass Plenum
- UPC-89F-1.5-6/8 Kit for 1.5-inch Fiberglass Plenum
- UPC-89M-6/8 Kit for Metal Plenum

Includes



6 / 8 — Supply Outlets (White)



12 / 16 — Scrim Core Clamps (Stamped '575')



12 / 16 — Supply Tubing Clamps (Stamped '605', Painted black)



12 / 16 — Toggles and Screws



1 — Balancing Orifice Kit for one outlet, includes (1) balancing cap, (1) 35% reducer disk, and (1) 50% reducer disk



6 / 8 — Winter Supply Shutoffs




6 / 8 — Couplings with Tape Rings

*UPC-89F only*



6 / 8 — Spin-In Take-offs for Fiberglass Ductboard

*UPC-89M only*




6 / 8 — Metal Take-offs with gasket and tape ring

### Outlet Kits, Short (5 Outlets)

- UPC-84-5 Outlet Kit for 1-inch Fiberglass Plenum
- UPC-85-5 Outlet Kit for Metal Plenum



5 — 12" (300 mm) Rigid Attenuators



5 — Supply Outlets (White)



5 — Winter Supply Shutoffs




10 — Toggles and Screws

*UPC-84-5 only*




5 — Fiberglass Spin-In Take-offs

*UPC-85-5 only*



5 — Metal Take-offs with gasket and tape ring

### Mounting Rails, M1218

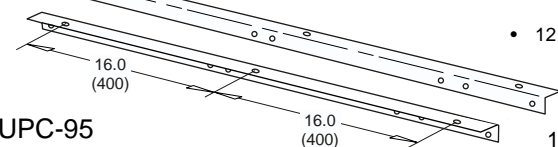


- 12 ga. steel

UPC-95













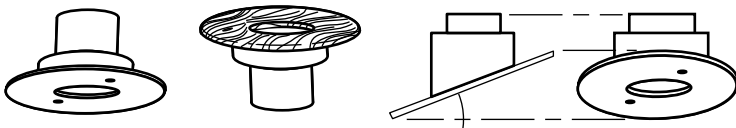
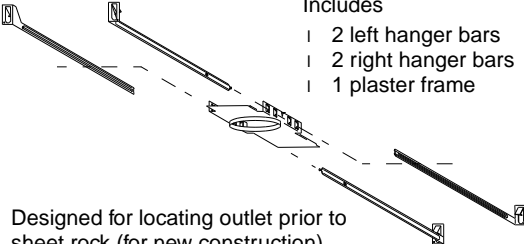
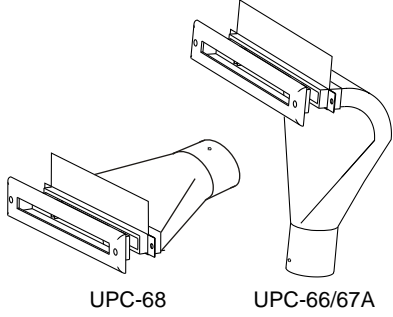

1 Set/Box
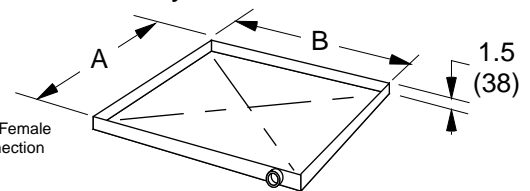
### Secondary Drain Pan







- 3/4-inch (19 mm) Female PVC Socket Connection

P/N	Used On	No. of Modules	Overall Dimensions A x B	
UPC-94	1218	N/A	22.0 x 40.0	(559 x 1016)
UPC-20B	2430	2	27.0 x 29.5	(686 x 749)
UPC-20C	2430	3	27.0 x 41.8	(686 x 1060)
UPC-24B	3642	2	40.0 x 29.5	(1016 x 749)
UPC-24C	3642/4860	3/2	40.0 x 41.8	(1016 x 1060)
UPC-24D	4860	3	40.0 x 54.0	(1000 x 1372)


<p><b>Spin-In Takeoff</b></p>  <p>Use UPC-23B for 1-inch fiberglass Use UPC-22 for 1.5-inch fiberglass</p> <p>UPC-22/23B 1 Ea./Box</p>	<p><b>Metal Takeoff Pkg</b></p>  <p>Includes tape ring and gasket</p> <p>UPC-28 1 Ea./Box</p>	<p><b>Supply Duct Coupling</b></p>  <p>Includes supply tubing clamps and tape rings</p> <p>UPC-38C-10 10 Ea./Box</p>	<p><b>Winter Shutoff (2")</b></p>  <p>UPC-42-20 20 Ea./Box</p>
<p><b>Supply Tubing Clamp</b></p>  <p>For alum. core Stamped '605' Painted black</p> <p>UPC-52-50 50 Ea./Box</p>	<p><b>Scrim Core Clamp</b></p>  <p>For sound atten. core Stamped '575'</p> <p>UPC-53-50 50 Ea./Box</p>	<p><b>Clamp Pliers</b></p>  <p>UPC-54 1 Ea./Box</p>	<p><b>2" Hole Cutter</b></p>  <p>UPC-55-5 5 Ea./Box</p>
<p><b>Outlet Deflector</b></p>  <p>UPC-45-5 5 Ea./Box</p>	<p><b>Outlet Hardware Pkg</b></p>  <p>Includes   A00094-001 Toggle   A00314-001 #4-24 x 1.5 Machine Screw</p> <p>UPC-51 10 Ea./Pkg</p>	<p><b>Mild Weather Kit</b></p>  <p>For heat pumps operating in mild weather.</p> <p>UPC-65 1 Ea./Box</p>	<p><b>Outlet Screen</b></p>  <p>UPC-88-20 20 Ea./Box UPC-88-20-BLK</p> <p>Use -BLK to order Black, Chrome or Brass, please specify</p>
<p><b>Supply Outlet Terminator</b></p>  <p>UPC-56B      UPC-57      15 or 25°      UPC-58-1-XX XX = angle of ceiling</p> <p>UPC-56B Supply Outlet (white) w/ toggles and screws UPC-57 Unfinished Oak w/ Screen UPC-58-1-XX Angled Outlet (white) w/ toggles and screws</p>			<p><b>Plaster Frame Kit</b></p>  <p>Includes   2 left hanger bars   2 right hanger bars   1 plaster frame</p> <p>Designed for locating outlet prior to sheet rock (for new construction).</p> <p>UPC-86-5 5 Ea./Box</p>
<p><b>Slotted Outlet</b></p> <p>UPC-66 (Metal) UPC-67A (Plastic) UPC-68 (Plastic)</p> <ul style="list-style-type: none"> <li>• factory insulated</li> <li>• fits in standard 2 x 4 construction</li> <li>• includes mounting bracket with hanger bars</li> <li>• includes a white plastic trim plate, also available in metallic silver, brass, or unfinished wood.</li> </ul>  <p>UPC-68      UPC-66/67A</p> <p>1 Ea. \ Box</p> <p>Accessories: Mounting Bracket: UPC-67-BRKT</p>	<p><b>Plenum Outlet</b></p>  <ul style="list-style-type: none"> <li>• mounts directly to plenum</li> <li>• includes mounting bracket and screws</li> <li>• includes a white plastic trim plate, also available in metallic silver, brass, or unfinished wood.</li> </ul> <p>UPC-101 1 Ea. \ Box</p>		

### Outlet Balancing Orifice Package

-  15% Reduction (1-7/16" (36mm) hole) — 5 / Pkg
-  35% Reduction (1-1/8" (28 mm) hole) — 5 / Pkg
-  50% Reduction (15/16" (23 mm)hole) — 5 / Pkg
-  Winter Shutoff (2-1/8" (53 mm)) — 15 / Pkg

UPC-36-15

### Supply Tubing




2" (50 mm) ID

- Tough Aluminized mylar outer wrap
- Two-ply aluminum core
- Fully insulated, (R-4.2 equivalent)
- 25 ft (7625 mm) lengths
- Certified as an Air Duct per UL181

Part No.	Ea/Box	OD, in. (mm)	R-Factor
UPC-25-1	1	3.5 (89)	R-3.2 (R-4.2**)
UPC-25-4	4	3.5 (89)	R-3.2 (R-4.2**)
UPC-25-R4-4	4	4.0 (102)	R-4.2 (R-5.8**)
UPC-25-R6-4	4	5.0 (127)	R-6.0 (R-9.2**)
UPC-25-R8-4	4	6.1 (152)	R-8.0 (R-13.2**)

\*\* equivalent insulation factor. Rated R-factor is based on flat wall insulation

### Sound Attenuator



2" ID (50 mm)




- Tough Aluminized mylar outer wrap
- Spun-bonded nylon and helical wire core
- Fully insulated
- 12 ft (7625 mm) lengths
- Certified as an Air Duct per UL181

6 Ea./Box

Part No.	OD, in. (mm)	R-factor
UPC-26C-6	3.5 (89)	R-3.2 (R-4.2**)
UPC-26CR4-6	4.0 (102)	R-4.2 (R-5.8**)
UPC-26CR6-6	5.0 (127)	R-6.0 (R-9.2**)
UPC-26CR8-6	6.1 (152)	R-8.0 (13.2**)

\*\* equivalent insulation factor. Rated R-factor is based on flat wall insulation

### Takeoff Balancing Orifice Package

-  UPC-30 15% Reduction (Cap) — 15 / Pkg
-  UPC-31 35% Reduction (Perf. disk) — 5 / Pkg
-  UPC-32 50% Reduction (Perf. disk) — 5 / Pkg


UPC-35-15

Intentionally left blank

Intentionally left blank

### Round Metal Plenum Fittings

#### Splitter Vane




Includes screws and washers.

4 Ea./Box

Model	D
UPC-11-07R-4	7.0 (178)
UPC-11-09R-4	9.0 (229)
UPC-11-10R-4	10.0 (254)

#### Reducer Tee

Includes insulation wrap.



1 Ea./Box

UPC-19V-090707


9 x 7 x 7 (225 x 175 x 175)

UPC-19V-100909

10 x 9 x 9 (254 x 225 x 225)

Intentionally left blank

### Supply Air Plenum Adapter, Round

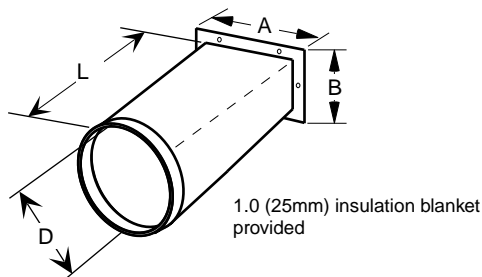


1 Ea. \ Box

P/N	Used On	Overall Dimensions			Dia. D
		A	B	L	
UPC-61-1218 (same as UPC-93)	1218	8.0 (203)	4.75 (121)	12.0 (305)	7.0 (178)
UPC-61-2430	2430	7.5 (191)	8.0 (203)	12.0 (305)	7.0 (178)
UPC-61-3642	3642	8.68 (220)	8.0 (203)	18.0 (457)	9.0 (229)
UPC-61-4860	4860	11.63 (295)	8.0 (203)	18.0 (457)	10.0 (254)

## Square Fiberglass Ductboard Plenum and Fittings

### Fiberglass Straight Duct


6 ft. (1829)  
lengths



Part No.	ID dimension
UPC-12-065S6-4	6.5 x 6.5 (163 x 163)
UPC-12-085S6-4	8.5 x 8.5 (216 x 216)
UPC-12-095S6-4	9.5 x 9.5 (241 x 241)

4 Ea./Box (8 Ea./Box Flat -8F)

### Full Flow Fiberglass Tee




1.0 (25)  
wall

Part No.	ID dimension
UPC-16V-065S-X	6.5 x 6.5 (163 x 163)
UPC-16V-085S-X	8.5 x 8.5 (216 x 216)
UPC-16V-095S-X	9.5 x 9.5 (241 x 241)

X-designates no. in box, either 1 or 4  
Includes Splitter Vane

### 90° Fiberglass Elbow




1.0 (25)  
wall

Part No.	ID dimension
UPC-18-065S-X	6.5 x 6.5 (163 x 163)
UPC-18-085S-X	8.5 x 8.5 (216 x 216)
UPC-18-095S-X	9.5 x 9.5 (241 x 241)

X-designates no. in box, either 1 or 4

### Fiberglass Duct Splitter Vane




Includes screws  
and washers.

Model	H
UPC-11-065S-4	6.38 (162)
UPC-11-085S-4	8.38 (213)
UPC-11-095S-4	9.38 (238)

4 Ea./Box

### Fiberglass End Cap




1.0 (25) wall

Model	A
UPC-15-065S-4	7.5 (191)
UPC-15-085S-4	9.5 (241)
UPC-15-095S-4	10.5 (267)

4 Ea./Box

## Supply Air Plenum Adapter, Square



- Includes:
- restrictor plate
  - insulation tape
  - mounting screws

1 Ea./Box

P/N	Used On	Dimensions A	Duct size**
UPC-62-1218* (same as UPC-62)	1218	8.5 (216)	6.5 x 6.5 (165 x 165)
UPC-62-2430	2430	8.5 (216)	6.5 x 6.5 (165 x 165)
UPC-62-3642	3642	10.5 (267)	8.5 x 8.5 (178 x 178)
UPC-62-4860	4860	11.5 (292)	9.5 x 9.5 (241 x 241)

\* Does not include restrictor plate

\*\* Based on inside dimension of 1-inch (25 mm) fiberglass ductboard

Intentionally left blank

