

Packless Industries

P.O. Box 20668 , Waco, Texas 76702

1-800-347-4859 . (254) 666-7893

<http://www.packless.com>

Product #:

VAF-4

Vibration Absorbers - Brass

- Eleven models available to fit copper tubing from 1/4 through 1 5/8 inches O.D.
- Each unit pressure and vacuum tested, cleaned, dehydrated and sealed in plastic film
- C-UL Approved


Notes:

1. Due to a continuous program of product improvement, specifications and dimensions are subject to change without notice.
2. For unusual installations, Packless vibration absorbers can be provided in special lengths or with PVC coating to protect them from condensation and freezing. Please consult factory with requirements.



Downloads

Installation
Recommendations

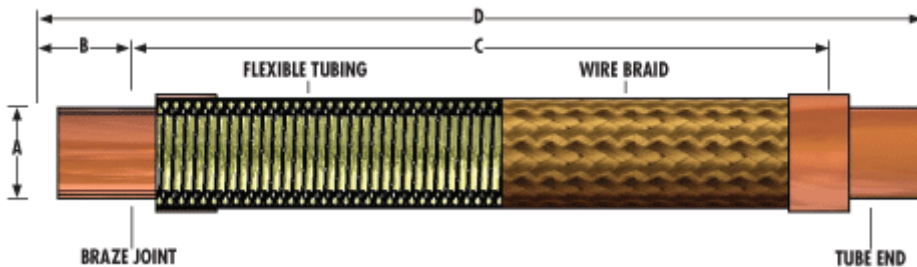

Specifications

Product #	VAF-4
Actual I.D. in.	1/2
Flex Tubing I.D. A in. (mm.)	3/8 (9.5)
D in. (mm.)	9 (228.6)
Max. Working Pressure psig. (bar.)	620 (43)
Burst Pressure psig. (bar.)	3100 (214)
B in. (mm.)	3/4 (19.0)
C in. (mm.)	7-1/2 (190.5)
Shipping Weight lbs. (kgs.)	1/2 (.23)
U.L. Style Number	P-4

Options

-- None --

Accessories

-- None --

Print... Close