


ICE MACHINE CONTROLS

A22/A30 ADAPTABLE REPLACEMENT CONSTANT DIFFERENTIAL CONTROLS

These compact controls are readily adaptable to nearly all commercial refrigerators and freezers. A wide selection of temperature ranges, differentials, and capillary lengths are available. Break-off shafts are included with installation instructions for easy, fast installation. Controls have "Off" position except as noted.

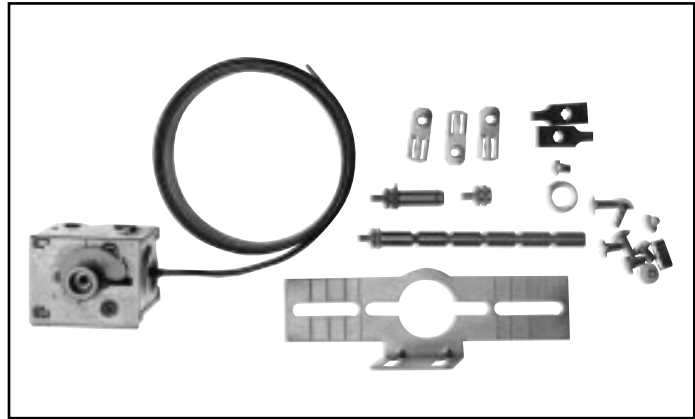

ELECTRICAL RATING

RATING	A22				A30		
	120V	240V	277V	24V	120V	240V	277V
AC FULL LOAD AMPS	20	20	16	-	20	20	16
AC LOCKED ROTOR AMPS	80	80	60	-	80	80	60
PILOT DUTY (VAC)	500	500	500	240	240	240	240
RESISTIVE LOADS AMPS	25	25	-	-	-	-	16


ORDERING DATA

UNI-LINE ORDER NO.	SWITCH	DIFF.	NORMAL		WARM ON (°F)	COLD OFF (°F)	CAPILLARY LENGTH
			OFF (°F)	ON (°F)			
A30 SERIES							
A30-180	SPST	13	9	22	38	-4	42"
A30-181	SPST	13	9	22	41	-4	84"
A30-182	SPST	17	3	20	44	-6	42"
A30-183	SPST	17	3	20	44	-6	84"
A30-184	SPST	19	6	25	40	-7	42"
A30-185**	SPST	15.5	5.5	21	36	-15	42"
A30-260	SPST	6	16	22	30	.5	72"
A30-261	SPST	6	-	-	61	32	84"
A30-262	SPST	12	20	32	43	3	84"
A30-263	SPST	22.5	11	33.5	47	.5	84"
A30-301*	SPST	8.5	-3	5.5	20.5	-24	84"
A30-304*	SPST	15.5	-6	9.5	19.5	21.5	84"
A30-307*	SPST	23	0	23	43	-23	78"
A30-308*	SPST	11	-12	-1	12.5	-30.5	84"
A30-310	SPST	20	-14	6	23	-24	36"
A30-311	SPST	14	-14	0	23	-22	42"
A30-313	SPST	8	-10	-2	21	-20	42"
A30-314	SPST	8	-10	-2	23	-23	54"
A22 SERIES							
A22-391*	SPDT	8	27	35	51	11	66"
A22-392*	SPDT	23.5	31	54.5	61.5	14	48"
A22-1112	SPST	5	34	39	44	25	72"

*Does not have "OFF" position ** Non stock special order.

A12 SERIES DIRECT REPLACEMENT CONSTANT CUT-IN CONTROLS

One-for-one replacements for vending machines, automatic beverage dispensers, and reach-in coolers. Reliable off-cycle defrost. SPST switch with Off position.

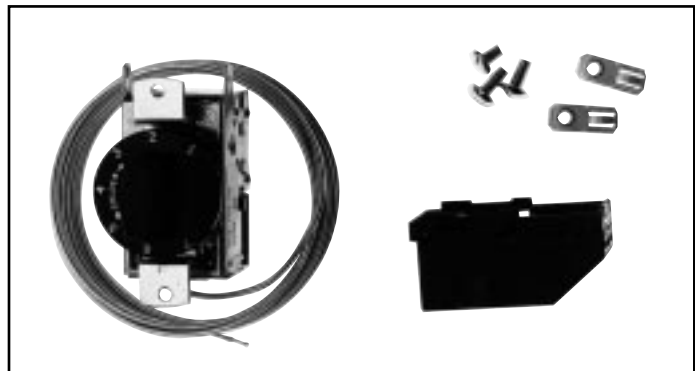

ELECTRICAL RATING

RATING	120V	208/240V
A.C. FULL LOAD AMPS	16	16
A.C. LOCKED ROTOR AMPS	80	80
PILOT DUTY (VA)	240	240

ORDERING DATA

UNI-LINE ORDER NO.	NORMAL OFF (°F)	WARM OFF (°F)	COLD OFF (°F)	CUT-IN OFF (°F)	CAPILLARY LENGTH
A12-1506	15	22	9	38	39 X 3/8 X 1-3/8"
A12-700	18	26	11.5	37	84"
A12-701	23.5	31	15	41	84"
A12-1560	24	29	19	38	72"