


**FLEX DUCT PRODUCT:  
RIP STOP  
SILVER JACKET**

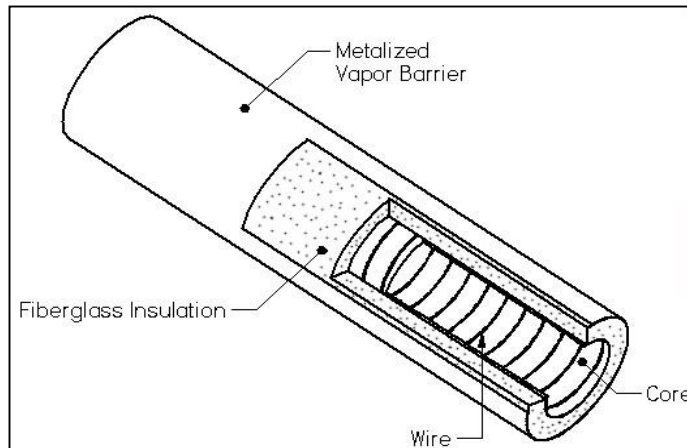

### VAPOR BARRIER

- The Quietflex Rip Stop Silver Jacket Flex Duct has a metalized polyester-vapor barrier with a special "rip stop" scrim reinforcement.
- Vapor Transmission: 0.05 perms

### FIBERGLASS

- R4.2, R6 and R8 certified by ETL and the Air Diffusion Council using ASTM C-518 at installed thickness of insulation
- Made of formaldehyde free materials

### CORE

- Two layers of polyester film encapsulate a galvanized or bronze coated wire helix
- Rated positive pressure is 10" W.C. and negative pressure is 1/2" W.C. per the UL 181 standard
- Rated maximum air velocity is 6000 FPM

### SURFACE BURNING CHARACTERISTICS

- Flame spread: Less than 25
- Smoke developed: Less than 50
- Class 1 rated duct assembly

### OPERATING TEMPERATURE RANGE

- -20 deg F to 180 deg F - Continuous
- -20 deg F to 200 deg F - Intermittent

### CONFIGURATIONS

- Diameters available: 3"-10", 12", 14", 16", 18", 20", 22"
- Lengths available: 25 ft

### APPROVALS

- ETL Listed/Approved to UL 181 Standard
- NFPA standards 90A and 90B
- HUD/FHA standards 515.2.1 Paragraph B
- Meets most federal, state and local codes and standards
- GREENGUARD certified entire duct construction

**Made in the USA**

Job Name		Submitter:		Date:	
Location					Class 1 Insulated Flexible Air Duct Metalized Polyester vapor barrier/ Silver jacket
Contractor					
Engineer					
Architect					
					<b>QFSD-002-01</b>