


**Reduce noise and improve performance in hydronic heating and cooling systems with the SuperVent® Top Air Vent.**


Used with SuperVent PV Series products, the Top Air Vent offers a high venting capacity that reduces and often eliminates the need for bleeding. That makes the SuperVent® Top a great choice for hard-to-reach areas. And when maintenance is needed, the built-in check valve makes it easy because you don't need to drain the system.

# SuperVent® Top Air Vent

LEAK-RESISTANT, LONG-TERM PERFORMANCE.

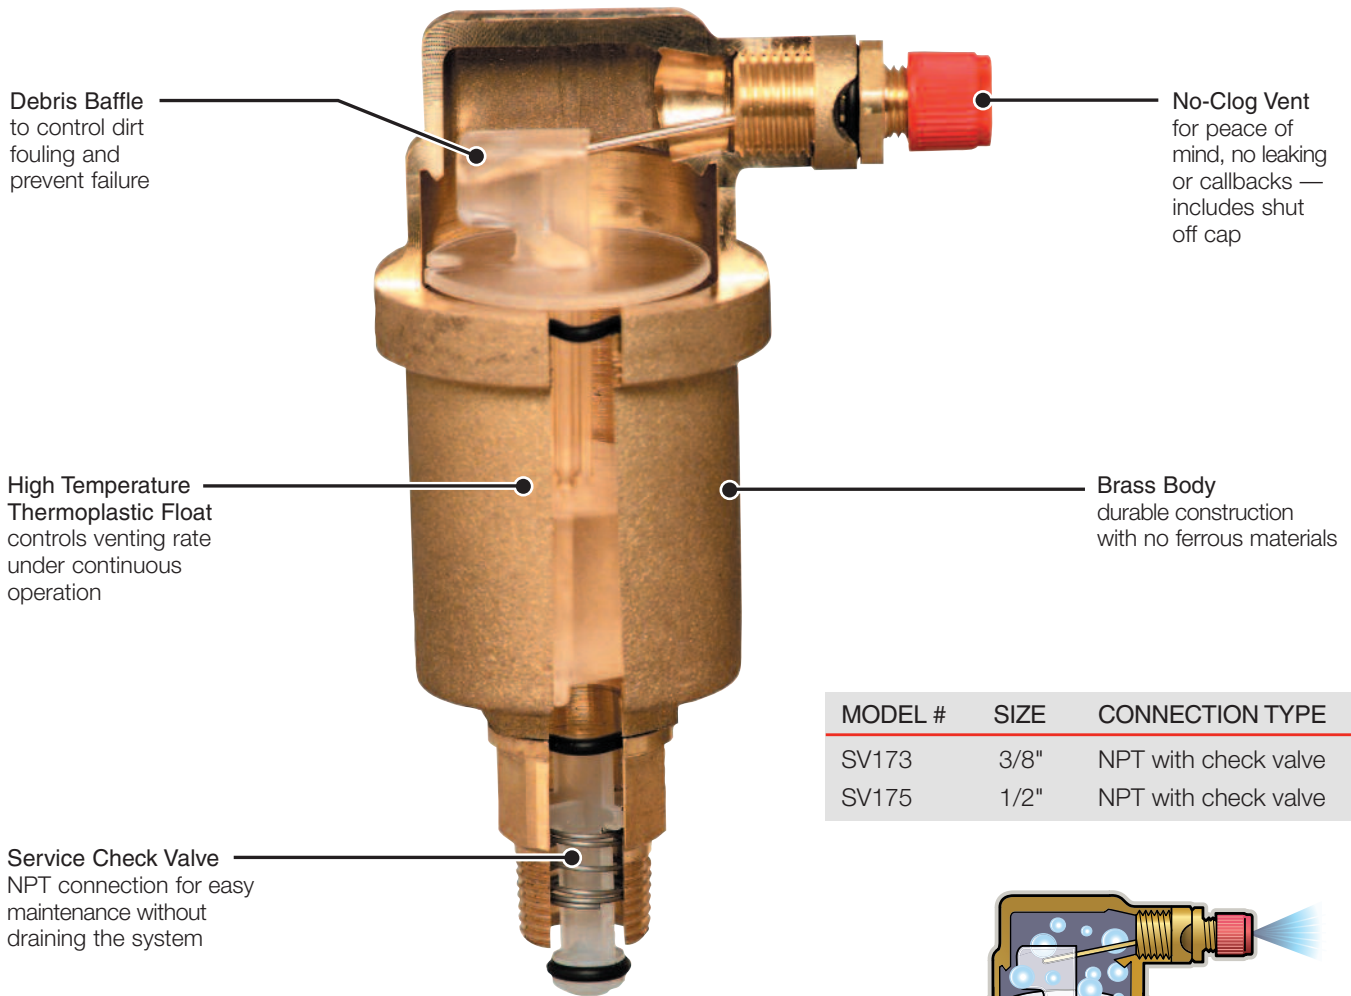

MODEL #	SIZE	CONNECTION TYPE
SV173	3/8"	NPT with check valve
SV175	1/2"	NPT with check valve

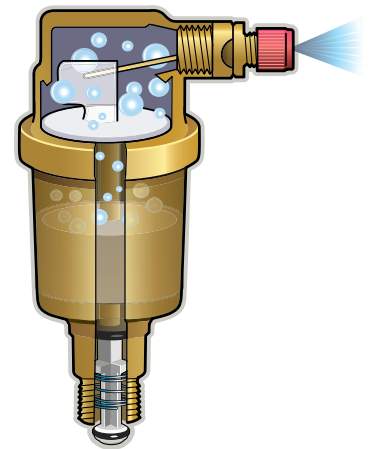

## Automation and Control Solutions

In the US:

Honeywell

1985 Douglas Drive North

Golden Valley, MN 55422-3992

In Canada:

Honeywell Limited

35 Dynamic Drive

Toronto, Ontario M1V 4Z9

Phone: (800) 328-5110

E-mail: [info@honeywell.com](mailto:info@honeywell.com)

[www.honeywell.com](http://www.honeywell.com)

*The SuperVent Top will only remove free air. For more information on the SuperVent Air Eliminator, contact your local Honeywell representative.*

# Honeywell