

The APD series is designed to reduce noise and vibration on the compressor discharge lines.

Features

- Compact size
- Full flow fittings
- Solid copper connections
- Corrosion resistant epoxy powder paint finish
- Rugged steel shells for vibration resistance
- Shock resistant steel shell construction



Specifications

- Maximum working pressure: 680 psig
- Operating Range: -40°F to +250°F
- UL/CUL file number: SA 5760


Nomenclature example: APD 053 SB

APD	05	3	S	B
Pulsation Dampener	Cubic Inches	Fitting Size in 1/8"	ODF Fittings	With Baffles (omit for standard)

Flow Capacity

Fitting Size	Tons
3/8	5-10
1/2	10-20
5/8	15-25
7/8	25-35
1 1/8	35+

Dimensional Data

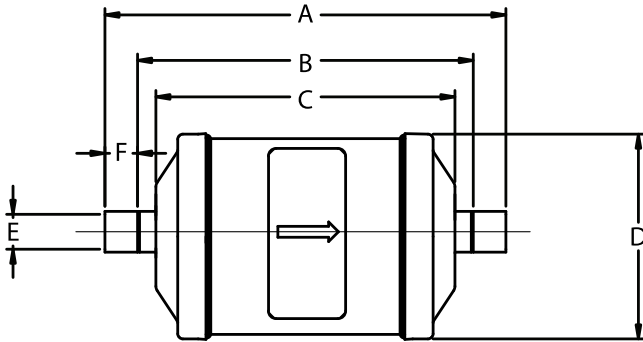

Ordering Information

PCN	Description	Dimensions (in)					
		A	B	C	D	E	F
061862	APD 1R	6.00	5.00	4.47	3.02		
049651	APD 054 S-B	4.56	3.56	3.00		0.50	0.50
059144	APD 163 S	6.25	5.38	4.75	2.63	0.38	0.38
060119	APD 165 S-B	6.56	5.31			0.63	0.63
061042	APD 167S-B	7.13	5.04	4.77	3.13	0.88	1.04
056989	APD 309 S	10.25	8.44	7.50	3.13	1.13	0.88