

# Energy Recovery Ventilator VE30160

**CLEAN COMFORT™**  
INDOOR AIR ESSENTIALS

## Features

- Three operating modes (Intermittent, Continuous and High)
- 100% variable speed
- ISF™ (Insert, Slide and Fix) 6" (153 mm) dia. collar system
- Advanced proportional supply fan shut-down defrost sequence
- Factory-installed, adjustable hanging strap system
- Dual permanently lubricated PSC motors
- Integrated auxiliary furnace interlock relay
- Ventilator can be balanced by adjusting each motor independently; no balancing dampers required
- Connection terminals for optional wall controls
- Quiet operation

## Energy Recovery Core


- Transfers both sensible and latent heat
- Effective in warm and cold climates
- Water washable

## Certifications and Standards

- HVI Certified
- CSA C439 Standard (Packaged Heat/ Energy Recovery Ventilators (HRV/ERV))
- CSA Standard CSA 22.2 NO.113-10 (Fans and ventilators)
- UL Standard 1812 2nd Ed. Ducted Heat/Energy Recovery Ventilators (HRV/ERV)



**Airflow (Front View)**

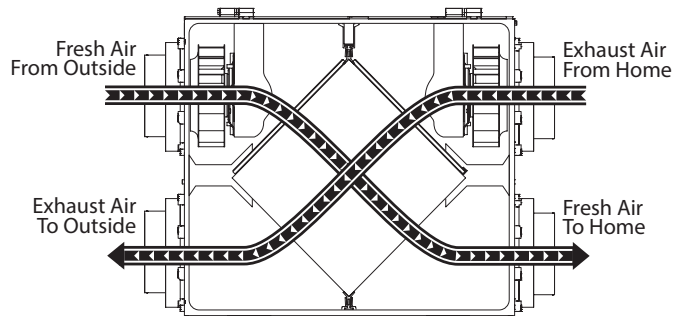

## Proprietary Notice

This document and the information disclosed herein are proprietary data of Daikin North America LLC. Neither this document nor the information contained herein shall be reproduced, used, or disclosed to others without the written authorization of Daikin North America LLC except to the extent required for installation or maintenance of recipient's equipment.

## Liability Notice

Daikin North America LLC does not accept any liability for installations of ventilation equipment installed by unqualified personnel or the use of parts/components/equipment that are not authorized or approved by Daikin.

## Copyright Notice

Copyright 2017, Daikin North America LLC All rights reserved.

## Specifications VE30160

### Cabinet

**Dimensions** 29½" x 22½" x 11⅜"  
(749.3 mm x 571.5 mm x 289 mm)

**Construction** 20-gauge galvanized pre-painted steel corrosion-resistant liner; molded expanded Polystyrene (EPS) Rated UL94 HF-1

**Duct Connections** Four, 6" (152.5 mm) dia. ISF double collar system

**Airflow Rates** 30 CFM (14 L/s) to 160 CFM (76 L/s)

**Motors** Two PSC variable-speed backward curved  
Maximum RPM 2695; 3/32 HP, Class F, thermally protected

**Voltage** 120 VAC @ 60 Hz / 1 Phase

**Amperage** 1.5 A / 142 W

**Electronic Components** Circuit output voltage: 5VDC nominal  
RoHS compliant

**Heat Exchanger** dpoinet cross-flow (Enthalpic Polymer Membrane)  
**Exchange surface** 85 ft<sup>2</sup> (7.9 m<sup>2</sup>)  
**Dimensions** 12"L x 12"W x 10"D (304.8 mm x 304.8 mm x 254 mm)  
**Construction** Corrugated aluminum layers with advanced polymer membrane, Recognized UL94 HB

**Defrost type** Evacuation; activated automatically at 23°F (-5°C)

**Filters** Two Fiberbond washable 11-11/16"x9-3/4"x5/8" (297 mm x 248 mm x 16 mm)

**Drain Connection** ½" (12.7 mm)

**Actual Weight** 42 lbs (19 Kg)

**Shipping Weight** 47½ lbs (21.5 Kg)


### Optional Wall Controls

**Mechanical** VHP-RD1, VHP-TC10 or VHP-DC15

**Timers** VHP-T3 (20, 40, 60 minutes)

### Wall Control Dimensions

#### VHP-RD1

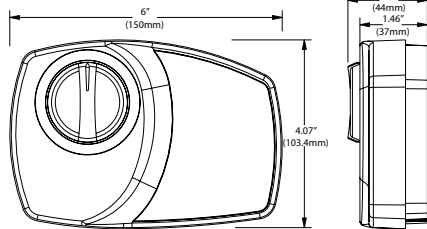


#### VHP-T3 Timer

and

#### VHP-TC10 /


#### VHP-DC15

Wall Controls




## Dimensional Data

### Front View

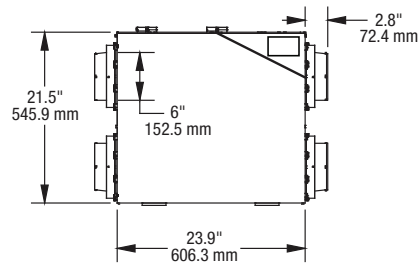


### Top View

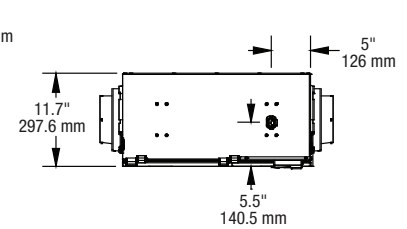


## Minimum Clearance Data

### Front View

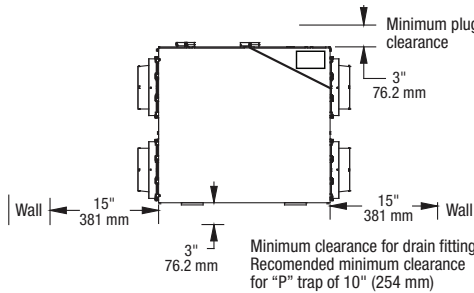


### Top View



## Ventilation Performance

External Static Pressure	Net Supply Airflow		Gross Airflow Supply		Gross Airflow Exhaust		
	Pa	in. wg	L/s	CFM	L/s	CFM	L/s
25	0.1	97	207	99	210	99	211
50	0.2	89	189	91	193	91	193
75	0.3	88	187	84	179	84	178
100	0.4	75	159	76	162	76	162
125	0.5	70	148	71	150	69	147
150	0.6	62	131	63	133	62	131
175	0.7	55	116	55	118	55	117



## Energy Performance

	Supply Temperature		Net Airflow		Power Consumed (Watts)	Sensible Recovery Efficiency	Latent Recovery Moisture Transfer	Adjusted Sensible Recovery Efficiency	Total Recovery Efficiency
	°C	°F	L/s	CFM					
Heating	0	32	24	51	58	65	0.32	73	
	0	32	38	80	76	65	0.29	71	
	0	32	56	118	96	62	0.26	67	
	-15	5	26	55	59	51	0.26	55	
Cooling	35	95	30	64	66	—	—	—	34

Our continuing commitment to quality products may mean a change in specifications without notice.

© 2017 **DAIKIN NORTH AMERICA LLC** • Houston, Texas • Printed in the USA.