

# Wilo Z-15 with Jet Connect™ Domestic Hot Water Recirculation

Product Brochure

**NEW!**



**WILO**  
Typ Star-Z 15  
Nr. 4092210/07w28  
LISTED WATER CIRCULATION PUMP  
CLASS F  
Do not install with motor above  
For indoor use only  
Employment with pressure & 1/2 inch pipe  
**WARNING:**  
Prevents risk of electrical shock  
See installation manual  
DO NOT RUN PUMP DRY


1-115 V | 60 Hz | 32 W | I<sub>max</sub> 0.77A  
GSA APPROVED  
IMPEDANCE PROTECTED  
WATER PRESSURE  
14 PSI MAX  
Max. water temperature  
200°F (93°C)  
Listed for indoor use only  
DO NOT RUN PUMP DRY

# Wilo Z-15 with Jet Connect™ Domestic Hot Water Recirculation



Application:      » Domestic Hot Water Recirculation Systems

Wilo Z-15 With Jet Connect™

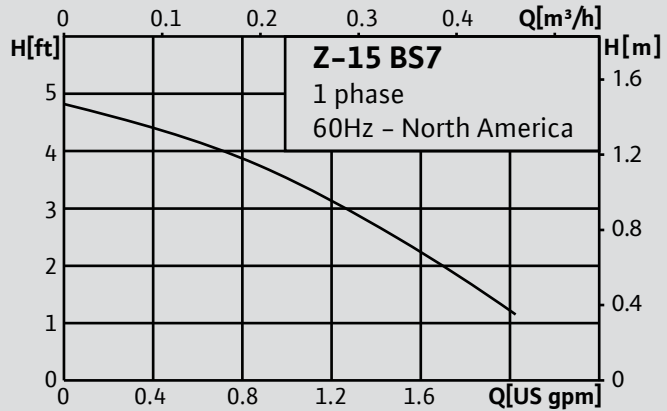

- » Compact design
- » NSF/ANSI 61 Annex G approved, lead-free bronze volute
- » 115v power cord included
- » Magnetic drive design
- » Jet Connect™ fitting pack included
- » Optional digital timer available
- » Conserves energy and water
- » Safe and quick installation

## NEW! - Wilo JetValve™



- » Adjustable temp. setpoint screw
- » ½" Hot and cold Male IPS inlets
- » ¾" Hot and cold male compression thread outlets
- » Available as standalone valve or with 20" SS flex connectors

## Includes Jet Connect™ Fitting Pack!



- » Two (2) ½" SW x FNPT
- » Two (2) ¾" SW x FNPT
- » Two (2) ¾" SW x ½" SW Reducing Bushings
- » Two (2) ¾" Street Hub Copper Unions



## Optional Digital Timer Available!

- » Weekly digital timer
- » Large LCD display
- » Conserve energy

## NEW! - Wilo Aquastat

- » Available Spring 2012
- » 8" Line cord
- » Turns on at 98°F (36°C)
- » Turn off at 114°F (46°C)



WILO USA LLC

Toll-Free: 888-945-6872  
Web: [www.wilo-usa.com](http://www.wilo-usa.com)  
Email: [info@wilo-usa.com](mailto:info@wilo-usa.com)



Pumpen Intelligenz.