



MINI-SPLIT PUMP KITS

White Series

Mounts directly below evaporator, quick installation



Code	Universal Voltage	Power Supply	Power Consumption	Ctn. Wt.	Qty
83939	(ASP-MW-UNI)	100-250 VAC	.17A 16W	2lbs	1

FEATURES

- Surface mounts below evaporator, at either end
- Crisp white color and slim profile complement any evaporator
- Resilient mounting minimizes vibration & noise
- Accepts standard 5/8" drain hose from any mini-split
- Fully potted electronics*
- No need to disturb evaporator to clean filter, reservoir clips out from front for easy removal and replacement
- Includes anti-siphon device

Specifications:

Duty Cycle:

Non-Continuous

Capacity:

Up to 54,000 BTU/hr; 2.9 GPH @ zero head; 1.2 GPH @ 33ft head

Maximum head: 39 ft

Maximum Water Temp: 104° F

Suction Lift: NA

Sound level:

21 dB(A)


3A N/C dry contacts rated @ 5A inductive @ 230V AC

Pump Dimensions:

L-71/8" x H-41/2" x W-2"

Class II Appliance

TYPICAL PUMP LOCATIONS

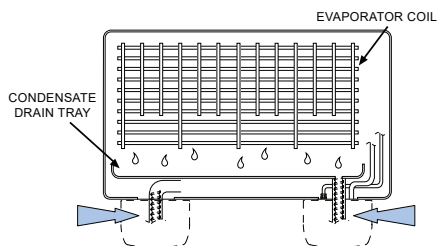

Aspen pre-filter available – see page 11

*Potting is the process of epoxy filling a complete assembly for resistance to shock, vibration, moisture, chemical and promotes sound dampening.