
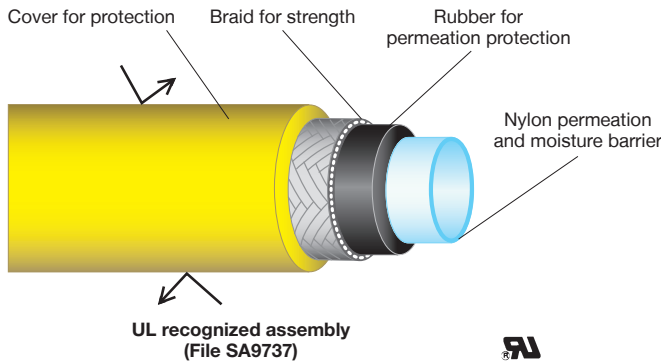


1. CHARGING SYSTEMS
2. GAUGES
3. RECOVERY MACHINES
4. VACUUM PUMP SYSTEMS
5. VACUUM AND CHARGING HOSES
6. HOSE ADAPTERS, VALVES & PARTS
7. WIRELESS AND ELECTRONIC INSTRUMENTS
8. LEAK DETECTORS AND MONITORS
9. HEATING INSTRUMENTS
10. SYSTEM TOOLS

PLUS II™ HOSES

- UL recognized assemblies (File SA9737)
- The nylon permeation barrier meets SAE requirements J2196 for CFC, HCFC, HFC refrigerants
- Barrier provides improved resistance to moisture migration which contaminates expensive refrigerant
- 1/4" RYB PLUS II™ hoses are rated for 4000 psi (276 bar) minimum burst and 800 psi (55 bar) maximum working pressure and an operating temperature of -20° to 180°F (-28.8° to 82.2°C)
- Minimum bend radius: 6" (152 mm)
- Made in the USA 

THE ANATOMY OF A HOSE




PLUS II™ Hoses with UL assemblies available in the following configurations:

- 1/4" with 1/4" flare fittings
- 1/4" with compact ball valve end
- 1/4" with SealRight™ low loss anti-blow back fitting
- 1/4" for 5/16" flare (1/2 – 20 thread) service ports for R-410A
- 1/4" with FlexFlow™ valve

A2L HOSES FOR LEFT-HANDED REFRIGERANT TANKS R-32/454B



- Conversion adapters from 1/4" Female SAE flare LEFT-HANDED (LH) x 1/4" Female SAE flare right-handed for A2L refrigerants
- Easily identified by double ring on tightening knurl for LH connection
- The moisture barrier provides improved resistance to moisture migration which contaminates expensive refrigerants
- 1/4" PLUS II™ hoses are rated for 4000 psi (276 bar) minimum burst, 800 psi (55 bar) maximum working pressure and an operating temperature of -20° to 180°F (-28.8° to 82.2°C)
- UL recognized hose assemblies (File SA9737)
- Nylon permeation barrier meets SAE requirements J2196 for CFC, HCFC and HFC refrigerants
- Minimum bend radius: 6" (152 mm)
- Made in the USA 

UPC #	Description
30260	Yellow PLUS II™ Hose, 60" 1/4" LH to 1/4" RH, 45°
30460	Yellow PLUS II™ Hose, 60" 1/4" LH to 1/4" RH, 45° w/Ball Valve
30660	Yellow PLUS II™ Hose, 60" 1/4" LH to 1/4" RH, 90°

See A2L Adapters in Section 6

PLUS II™ hose - standard 1/4" flare fittings				
Length	Yellow	Blue	Red	3 pak*
12"	21012	21212	21612	-
24"	21024	21224	21624	-
36"	21036	21236	21636	21983
48"	21048	21248	21648	21984
60"	21060	21260	21660	21985
72"	21072	21272	21672	21986
96"	21096	21296	21696	21988
10'	21110	21310	21710	-
12'	21112	21312	21712	-
25'	21125	21325	21725	-
50'	21150	21350	21750	-
75'	21175	21375	21775	-
100'	21200	21399	21799	-
Multi-length				21982 two 36", one 60" 21981 two 36", one 72"

* 3 pak includes a red, yellow and blue hose.

Replacement parts	
UPC#	Description
19020	Replacement gasket (10 pak)
19302	Adjust-a-Valve™ opener (10 pak)