


The image shows a large roll of flexible duct material, likely for HVAC systems. The duct has a multi-layered construction with a shiny, reflective outer layer and a fibrous, greyish inner core. A large, solid blue diagonal shape overlays the right side of the image, creating a modern, technical aesthetic. The text is positioned in the upper right area of the blue overlay.

HART COOLEY

Flexible Duct Systems
Residential & Commercial
Edition 6


| | |
|------------------------------------|------|
| FLEXIBLE DUCT SYSTEMS | Page |
| MODEL SELECTOR..... | 1 |
| PRODUCT INFORMATION | 2-3 |
| PERFORMANCE DATA | 3 |
| AIR DUCTS, RESIDENTIAL SERIES..... | 4-5 |
| AIR DUCTS, COMMERCIAL SERIES | 5-6 |
| AIR CONNECTORS AND SLEEVES | 7 |
| ACCESSORIES..... | 8 |
| AIR FRICTION CHART | 9 |

MODEL SELECTOR

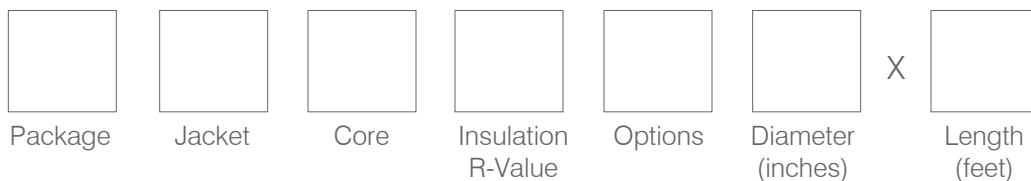

| Package | Jacket | Core | Insulation | Options |
|-------------|---|---|----------------------|-----------------------------|
| F – Boxed | 0 – No Jacket | 0 – No Core | 0 – No Insulation | CP – Compressed |
| FB – Bagged | 1 – Black Polyethylene Jacket | 1 – Double-Ply Black Polyester Core | 4 – R-4.2 Insulation | UCP – Uncrimped, Compressed |
| | 2 – Metalized Polyester Jacket | 4 – Corrugated Aluminum Core | 6 – R-6.0 Insulation | |
| | 3 – Heavy-Duty (4 mil.) Black Polyethylene Jacket | 9 – Multi-Ply Metalized/Polyester Core "Commercial Series" | 8 – R-8.0 Insulation | |

How to Order:

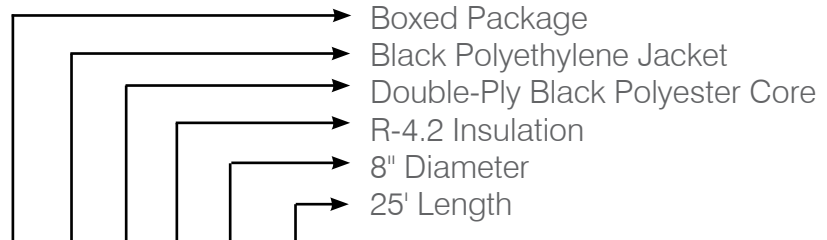

F 1 1 4 8 25

Disclaimer: We reserve the right to make changes in the products, product specifications, packaging and to discontinue product without notice.


Product Information



Hart & Cooley offers flexible duct products for both residential and commercial applications that provide the most economical solution to your air-handling needs. H&C uses Formaldehyde-Free, bio-based, environmentally friendly insulation for improved indoor air quality. Available in boxes or bags. Custom lengths available.

POLYETHYLENE JACKET AIR DUCTS. These feature a durable, scuff-resistant black polyethylene vapor barrier that provides improved protection against damaging ultra-violet light. Installation is made easy with the reinforcing fiberglass yarn scrim, which acts as a rip-stop and helps prevent tearing. These air ducts feature an R-value of 4.2, 6.0 or 8.0 to fit any application, and also come in special configurations designed for manufactured homes.

METALIZED JACKET AIR DUCTS. Providing the ultimate in strength and protection, metalized polyester vapor barriers are reinforced with fiberglass scrim to provide high durability and tear resistance. The fiberglass insulation furnishes outstanding thermal protection with R-values of 4.2, 6.0 or 8.0. The metalized jacket air duct and sleeves are available with either a two-ply, black polyester core (Residential Series) or high-pressure, multi-ply, metalized polyester laminate core (Commercial Series) that encapsulate a high carbon steel wire helix.

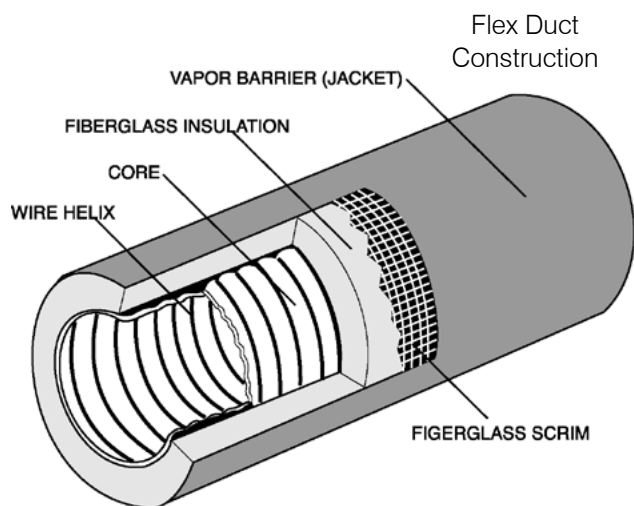

TEN-YEAR WARRANTY. All Hart & Cooley flexible duct products are protected by the industry's strongest warranty. Our flexible ducts are warranted to be free of defects in material and workmanship for ten (10) years from the date of shipment. (Contact Hart & Cooley, Inc. for full details.)

ECONOMICAL AIR DUCT CONNECTORS. Designed for high pressure applications, air duct connectors utilize either a multi-ply metalized/polyester laminate encapsulating a high carbon steel wire helix or corrugated aluminum for maximum strength and durability.

UL-LISTED. Hart & Cooley flexible air ducts and air connectors have been rigorously tested by Underwriters Laboratories, Inc. in accordance with UL 181, The Standard for Safety for Factory-Made Air Ducts and Air Connectors. UL is a not-for-profit laboratory with an outstanding reputation for fire safety and performance testing. Make sure that the flexible duct you buy bears this UL mark. **Our UL listing assures you that our duct cores will not promote the mold growth.**



GREENGUARD LISTED for microbial resistance. All Hart & Cooley flexible ducts are listed as Highly Microbial Resistant under the GREENGUARD Microbial Resistance Listing program.

UL GREENGUARD GOLD. All Hart & Cooley insulated flexible air ducts have achieved GREENGUARD Gold certification from UL Environment. This certification connects consumers to products certified for low chemical emissions.



ADC-CERTIFIED R-VALUES. All Hart & Cooley insulated flexible air ducts are certified by the Air Diffusion Council for thermal performance in accordance with the ADC Flexible Duct Performance & Installation Standards (1996). Certified R-values are essential to ensure that the product you buy meets the many regulatory energy codes. Only ADC-certified products will bear this ADC thermal certification marking.



Thermal Performance

AMERICAN SCHOOLS AND HOSPITAL FACILITY PRODUCT DIRECTORY
facilitymanagement.com/directory/hvac.html
 under Indoor Air Quality.

CODE APPROVALS. All Hart & Cooley flexible duct products meet or exceed the requirements of most federal, state, and local mechanical and energy codes. They comply with the International Mechanical Code (IMC), the Uniform Mechanical Code (UMC), NFPA 90A and 90B, HUD, and the California Bureau of Home Furnishings, just to name a few.



OUTSTANDING PERFORMANCE. All Hart & Cooley flexible duct products are performance-tested in accordance with industry standards to ensure reliability and years of service. Our core is tested (in accordance with ADC FD 72-R1) for actual installation static pressure/ temperature performance and meets the ratings specified in our catalog. Our polyester cores are also tested for microbial resistance by GEI per ASTM D6329-98. The vapor barriers are tested for permeation in accordance with ASTM test methods. Call-backs are expensive and eat away at your profits. Use flexible duct you know has been performance-tested.

INDUSTRY INVOLVEMENT.

Hart & Cooley is committed to the flexible duct industry and supports it through involvement in many industry-related associations, committees, and organizations. Participation in Air Diffusion Council and Underwriters Laboratories, Inc. industry advisory council allows Hart & Cooley to stay at the forefront of industry changes.

Performance Data

RESIDENTIAL SERIES BLACK POLYESTER CORE

- Rated pressure per UL 181: 12" W.C. positive, 3/4" W.C. negative (1/2" W.C. neg for 14" – 20" diameter)
- Recommended operating pressure: 6" W.C. positive for 12" diameter and under 4" W.C. positive for 14" diameter and over
- Rated maximum air velocity: 5000 FPM
- For residential and light commercial applications

COMMERCIAL SERIES METALIZED POLYESTER CORE

- Rated pressure per UL 181: 16" W.C. positive, 1" W.C. negative (1/2" W.C. neg for 14" – 20" diameter)
- Recommended operating pressure: 6" W.C. positive for 12" diameter and under 4" W.C. positive for 14" diameter and over
- Rated maximum air velocity: 6000 FPM
- For residential and most commercial applications

COMMERCIAL SERIES CORRUGATED ALUMINUM CORE

- Maximum rated pressure per UL 181: 12" W.C. positive for 10" diameter and under 8" W.C. positive for 12" diameter and over 3" W.C. maximum negative
- Rated maximum air velocity: 5000 FPM

INSULATION R-VALUES

- Certified by Underwriters Laboratories Inc. and the Air Diffusion Council in accordance with ADC Flexible Duct Performance and Installation Standards using ASTM C-518 at installed wall thickness on flat insulation only

POLYETHYLENE JACKETS

- A durable black polyethylene vapor barrier
- High tensile scrim is used under the vapor barrier to provide additional strength and tear resistance
- Perm rating of 0.1 (ASTM E96 Method "A")

METALIZED JACKETS

- A metalized polyester vapor barrier is constructed by sandwiching fiberglass scrim between layers of polyester to provide an outstanding combination of strength and tear resistance
- Perm rating of 0.04 (ASTM E96 Method "A")

SURFACE BURNING CHARACTERISTICS

(Class 1 Air Ducts)

- Maximum flame spread: 25
- Maximum smoke developed: 50

OPERATING TEMPERATURE RANGE

- -20°F to 140°F continuous @ max. Pos. pressure
- -20°F to 180°F intermittent @ 2" W.C. Pos. pressure
- -20°F to 250°F intermittent @ 0.5" W.C. Pos. pressure
- For corrugated aluminum cores: -100°F to 250°F continuous @ max Pos. pressure

CODE APPROVALS, CERTIFICATIONS, AND LISTINGS

- UL 181 Listed
- IMC
- UMC
- California Bureau of Home Furnishings
- Most Federal, State, and Local codes and standards
- NFPA 90A and 90B
- HUD

Residential Series Flexible Air Ducts



F114, FB114 / F116, FB116 / F118, FB118

- Black polyethylene jacket
- Double-ply black polyester core 12" W.C. positive, 3/4" W.C. negative (1/2" W.C. neg for 14" – 20" diameter)
- R-4.2 / R-6.0 / R-8.0
- UL-listed
- Boxed or bagged (FB series)
- 25' and 50' lengths
- GREENGUARD Listed for microbial resistance

| Model | Length (feet) | Diameter (inches) | | | | | | | | | | | | | | | | |
|-------|---------------|-------------------|---|---|---|---|---|---|----|----|----|----|----|----|--|--|--|--|
| F114 | 25 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | | | | |
| FB114 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | | | | |
| F114 | 50 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | - | - | - | - | | | | |
| F116 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | | | | |
| FB116 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | | | | |
| F116 | 50 | - | - | 5 | 6 | 7 | 8 | 9 | 10 | - | - | - | - | - | | | | |
| F118 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | | | | |
| FB118 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | - | | | | |
| F118 | 50 | - | - | - | 6 | 7 | 8 | - | - | - | - | - | - | - | | | | |



F214, FB214 / F216, FB216 / F218, FB218

- Metalized polyester jacket reinforced with fiberglass scrim
- Double-ply black polyester core 12" W.C. positive, 3/4" W.C. negative (1/2" W.C. neg for 14" – 20" diameter)
- R-4.2 F214,FB214 / R-6.0 F216,FB216 / R-8.0 F218,FB218
- UL-listed
- Boxed or bagged (FB series)
- 25' and 50' lengths
- GREENGUARD Listed for microbial resistance

| Model | Length (feet) | Diameter (inches) | | | | | | | | | | | | | | | | |
|-------|---------------|-------------------|---|---|---|---|---|---|----|----|----|----|----|----|--|--|--|--|
| F214 | 25 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | | | | |
| FB214 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | | | | |
| F214 | 50 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | - | - | - | - | | | | |
| F216 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | | | | |
| FB216 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | | | | |
| F216 | 50 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | - | - | - | - | - | | | | |
| F218 | 25 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | | | | |
| FB218 | 25 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | - | | | | |

Residential Series Flexible Air Ducts



F314 / F318

(Manufactured Home) Class 1 Air Duct

- Heavy-duty 4 mil. black polyethylene jacket
- Double-ply black polyester core 12" W.C. positive, 3/4" W.C. negative (1/2" W.C. neg for 14" – 20" diameter)
- R-4.2 F314, R-8.0 F318
- UL-listed
- 25' length
- Boxed
- GREENGUARD Listed for microbial resistance

| Model | Length (feet) | Diameter (inches) | | | | | | | | | | | | |
|-------|---------------|-------------------|---|---|---|---|---|---|----|----|----|---|---|---|
| F314 | 25 | - | 4 | 5 | 6 | - | 8 | - | 10 | 12 | 14 | - | - | - |
| F318 | 25 | - | - | - | - | - | - | - | 10 | 12 | 14 | - | - | - |

Commercial Series Flexible Air Ducts



F144 / F146 Commercial Series

- Black polyethylene jacket
- Corrugated aluminum core 12" W.C. positive, 3" W.C. negative
- R-4.2, R-6.0
- UL-listed
- Available in 6' and 7 1/2' lengths

| Model | Length (feet) | Diameter (inches) | | | | | | | | | | | | | |
|-------|---------------|-------------------|---|---|---|---|---|----|----|----|----|----|----|-----------------|-----------------|
| F144* | 6 | 4 [†] | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | 22 [†] | 24 [†] |
| F144* | 7 1/2 | 4 [†] | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | 22 [†] | 24 [†] |
| F146* | 6 | 4 [†] | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | 22 [†] | 24 [†] |
| F146* | 7 1/2 | 4 [†] | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | 22 [†] | 24 [†] |

*For California Only †Not UL-listed



F194 Commercial Series

- Black polyethylene jacket
- UL-listed
- High pressure core, 16" W.C. positive, 1" W.C. negative (1/2" W.C. neg for 14" – 20" diameter)
- Multi-ply metalized/polyester core
- R-4.2
- Boxed
- 25' length
- GREENGUARD Listed for microbial resistance

| Model | Length (feet) | Diameter (inches) | | | | | | | | | | | | |
|-------|---------------|-------------------|---|---|---|---|---|---|----|----|----|----|----|----|
| F194 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 |

Commercial Series Flexible Air Ducts



F246 Commercial Series

- Metalized polyester jacket
- Corrugated aluminum core
12" W.C. positive, 3" W.C. negative
- R-6.0
- UL-listed
- Available in 6' and 7 1/2' lengths

| Model | Length (feet) | Diameter (inches) | | | | | | | | | | | | | |
|-------|---------------|-------------------|---|---|---|---|---|----|----|----|----|----|----|-----------------|-----------------|
| F246* | 6 | 4 [†] | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | 22 [†] | 24 [†] |
| F246* | 7 1/2 | 4 [†] | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | 22 [†] | 24 [†] |

*For California Only †Not UL-listed



F294, FB294 / F296, FB296 / F298, FB298 Commercial Series

- Metalized polyester jacket reinforced with fiberglass scrim
- High pressure multi-ply metalized/polyester core, 16" W.C. positive, 1" W.C. negative (1/2" W.C. neg for 14" – 20" diameter)
- R-4.2 F294,FB294 / R-6.0 F296,FB296 / R-8.0 F298,FB298
- UL-listed • Boxed and bagged • 25' length
- GREENGUARD Listed for microbial resistance

| Model | Length (feet) | Diameter (inches) | | | | | | | | | | | | | |
|-------|---------------|-------------------|---|---|---|---|---|---|----|----|----|----|----|----|--|
| F294 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | |
| FB294 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | |
| F296 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | |
| FB296 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | |
| F298 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | |
| FB298 | 25 | - | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | |



AlumiFlex™ F040CP

- Sturdy corrugated aluminum construction
- Bulk packaged
- Class 0 air connector
- One end crimped, compressed



- F040UCP
- Uncrimped, compressed



- F040
- Male/Female collars, uncompressed
 - UL-listed air duct
 - California only

| Series | Model | Length (feet) | Diameter (inches) | | | | | | | | | | | | | | |
|-------------|---------|---------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----|-----------------|-----------------|
| Commercial | F040* | 6 | - | 4 [†] | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | 22 [†] | 24 [†] |
| Commercial | F040* | 7 1/2 | - | 4 [†] | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 | 22 [†] | 24 [†] |
| Residential | F040CP | 8 | 3 [†] | 4 [†] | 5 [†] | 6 [†] | 7 [†] | 8 [†] | 9 [†] | 10 [†] | 12 [†] | 14 [†] | 16 [†] | 18 [†] | - | - | - |
| Residential | F040UCP | 8 | 3 [†] | 4 [†] | 5 [†] | 6 [†] | 7 [†] | 8 [†] | 9 [†] | 10 [†] | 12 [†] | 14 [†] | 16 [†] | 18 [†] | - | - | - |
| Residential | F040CP | 10 | 3 [†] | 4 [†] | 5 [†] | 6 [†] | - | 8 [†] | - | - | - | - | - | - | - | - | - |
| Residential | F040UCP | 20 | 3 [†] | 4 [†] | 5 [†] | 6 [†] | 7 [†] | 8 [†] | - | - | - | - | - | - | - | - | - |

U = Uncrimped
UCP = Uncrimped Compressed

*For California Only Other sizes available upon request †Not UL-listed



F090 Commercial Series

- High pressure multi-ply metalized/polyester core, 16" W.C. positive, 1" negative. (1/2" W.C. neg for 14" – 20" diameter)
- UL and CUL listed
- 25' length
- GREENGUARD Listed for microbial resistance
- Bulk packaged
- Class 1 air connector

F010

Double-ply black polyester core, 12" W.C. positive, 3/4" negative (1/2" W.C. neg for 14" – 20" diameter)

| Model | Length (feet) | Diameter (inches) | | | | | | | | | | | | |
|-----------|---------------|-------------------|---|---|---|---|---|---|----|----|----|----|----|----|
| F090/F010 | 25 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 18 | 20 |



F104, F106, F108

- Black polyethylene jacket
- R-4.2 F104 / R-6.0 F106 / R-8.0 F108 (R-values valid if sleeve is used on relatively sized duct)
- UL-classified
- 5' length
- Starter cone included in each carton

| Model | Length (feet) | Diameter (inches) | | | | | | | | | | |
|-------|---------------|-------------------|---|---|---|---|---|----|----|----|----|--|
| F104 | 5 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | |
| F106 | 5 | 4 | 4 | 5 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | |
| F108 | 5 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | |



F204, F206, F208

- Metalized polyester jacket
- R-4.2 F204 / R-6.0 F206 / R-8.0 F208 (R-values valid if sleeve is used on relatively sized duct)
- 5' length
- Starter cone included in each carton
- UL-classified

| Model | Length (feet) | Diameter (inches) | | | | | | | | | | |
|-------|---------------|-------------------|---|---|---|---|---|----|----|----|----|--|
| F204 | 5 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | |
| F206 | 5 | 4 | 4 | 5 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | |
| F208 | 5 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | |

Accessories



Black



Silver

Duct Tape

- Acrylic adhesive won't dry out
- Single-ply polypropylene backing
- Tears easily by hand
- UL-listed and marked UL-181B-FX

| Part No. | Description | Size |
|----------|-------------|----------------|
| 011371 | Black | 2" x 120 yards |
| 011372 | Silver | 2" x 120 yards |




IMPROVES AIRFLOW!

SMART Flow Elbow

- One size fits 4" to 16" flex duct.
- Eliminates flex duct kinks and restrictions
- Can be used for new and retrofit applications
- UL-2043 Classified

| Part No. | Description | Pieces per Case |
|----------|--|-----------------|
| 630500 | SMART Flow Elbow | 25 |
| 636501 | SMART Flow Elbow Kit Each kit includes 2 Flow Elbows and 4 36" duct straps | 12 kits |

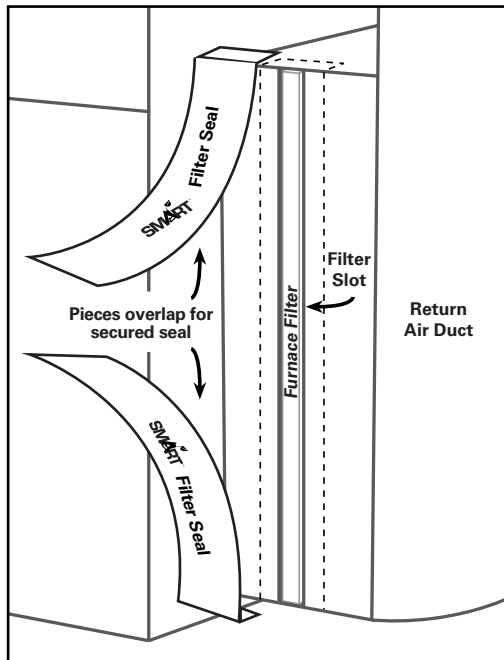


SMART Filter Seal

- Seals furnace filter opening
- 2-piece overlapping construction
- Fits up to 25" opening
- Residential or Commercial construction
- Improves indoor air quality
- Saves energy

| Part No. | Description | Pieces per Case |
|----------|-------------------|-----------------|
| 2000153 | SMART Filter Seal | 25 |

Air Friction Chart for Flexible Duct only

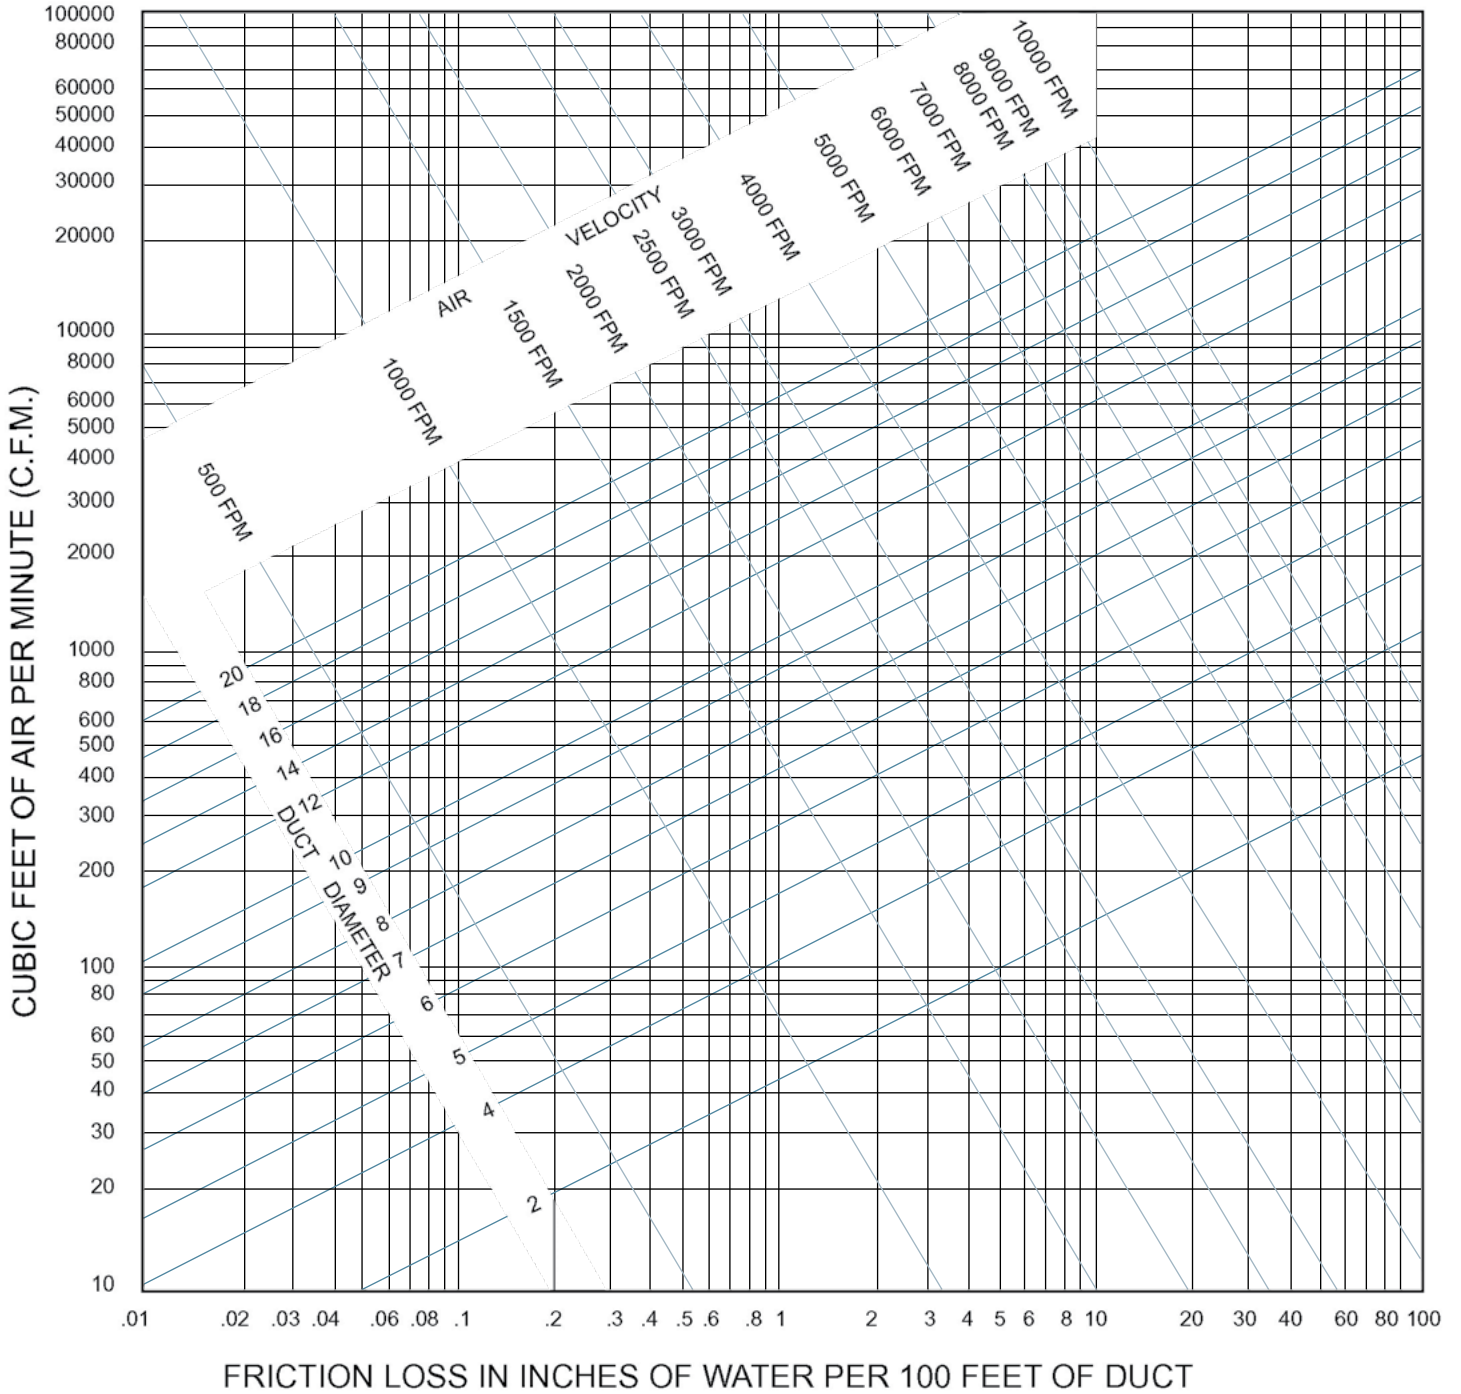

Hart & Cooley

5030 Corporate Exchange Blvd. SE
Grand Rapids, MI 49512

P (800) 433-6341

F (800) 223-8461

hartandcooley.com

Offered by,